



For Your  
Little One

## INSTRUCTION MANUAL

IMPORTANT – PLEASE READ THE INSTRUCTIONS CAREFULLY  
BEFORE USE AND KEEP FOR FUTURE REFERENCE.



# FOR YOUR LITTLE ONE TRIKE V3

FOR ANY HELP OR ASSISTANCE, PLEASE CONTACT THE  
FOR YOUR LITTLE ONE TEAM:

☎ TEL: 0121 389 4698

✉ Email: [help@foryourlittleone.com](mailto:help@foryourlittleone.com)

🌐 [foryourlittleone.com](http://foryourlittleone.com)

## STEP 1

Insert the front wheel into the frame. See images, the metal spring clip should be pointing forward.



Step 1.

## STEP 2 & 3

Attach the front basket via the lungs shown..



Step 2.



Step 3.

## STEP 4

Secure the handle bars by firmly pressing them down on the front wheel shaft until you hear an audible click..



Step 4a.



Step 4b.



Step 4c.



Step 4d.

## STEP 5

Attach the brake mechanism by lining up the lungs, then firmly push them onto the rear of the frame.



Step 5a.



Step 5b.

## STEP 6

Time to attach the wheels, please note the order of these parts are crucial, it should be a long pin, followed by a rubber washer then a metal washer, then inserted through the wheel. Firmly push the wheel assembly through the brake mechanism and into the rear of the frame.




Step 6a.



Step 6b.



Step 6c.

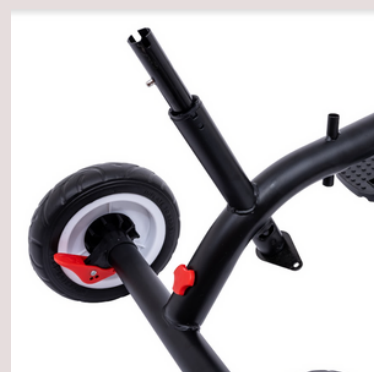


Step 6d.

## STEP 7 & 8

Time for the handle bars, Insert the top handle into the Y section, time to link the steering assemblies.

Make sure (image 6d) is inserted as shown in image. Insert the pole through the frame from underneath, making sure to push it all the way through. Support the bottom of the pole and push down on the parent handle until you hear an audible click (step 8 image).

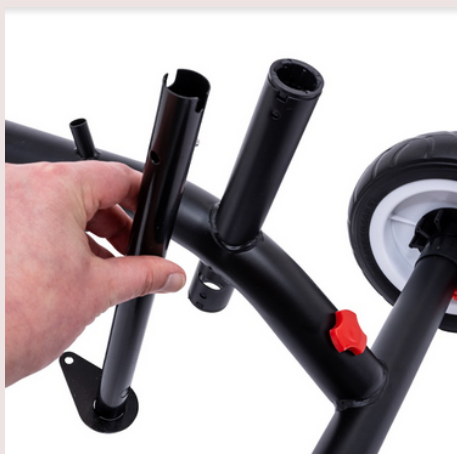

Step 7.



Step 8.

## STEP 9 & 10

Lock the parents handle in place by lifting up the red lever. Now your trike should look like image 10.



Step 9.



Step 10.

## STEP 11,12,13 & 14

Link the steering assemblies by attaching the rod to the holes near the front wheel and the bottom of the parent handle (image 13). The hook end goes through the front tab, the threaded end goes through the rear tab.



Step 11.



Step 12.



Step 13.



Step 14.

## PLEASE NOTE

If the parent handle doesn't perfectly line up with the front steering wheel, this rear threaded tab is adjustable allowing you to realign.

## STEP 15 & 16

Attach the rear basket by simply pushing it onto the rear of the frame and tighten down using the red knob.



*Step 15.*



*Step 16.*

## STEP 17, 18, 19 & 20

Place the seat cup onto the locating pin on the frame, the taller part goes to the rear. Place the seat base onto the seat cup, again using the locating pin this time on the seat base. Whilst supporting the seat thread the screw into the base of the seat, tighten to secure.



Step 17.



Step 18.



Step 19.



Step 20.

## STEP 21

Simply attach the safety gate by depressing the red toggle and insert into the side of the seat. Lock the gate together by using the same process.



Step 21.

## **STEP 22**

Time to attach the seat cover simply slide the seat over over the plastic seat mold and make sure the seat belts are through the holes provided on the seat mold. You will find the bottom of the seat cover will need to be added onto the safety gate you did in step 21.



*Step 22.*

## **STEP 23**

Time to attach the hood, simply slide the hood onto the lungs located on the side of the seat.

## **STEP 24**

The accessory pouch is simply attached via two press studs and velcro to secure the bottom.



# **SAFETY PRECAUTIONS**

## **PLEASE READ THE INSTRUCTION CAREFULLY AND KEEP IT PROPERLY BEFORE USING THE PRODUCT**

1. Before use, please carefully check whether all parts are installed in place and connected firmly.
2. Keep away from the fire.
3. This vehicle is not a vehicle. It is forbidden to drive in dangerous areas such as streets and roads.
4. Please do not use it on the uneven road surface and the site with potential safety hazard.
5. Avoid using in dark, night or low visibility to avoid danger.
6. Please put away the PE plastic bag in time to avoid suffocation caused by children playing.
7. This product contains small parts. If it is loose or droned. do not let children in the mouth to avoid accidental swallowing.

# WARNING!

1. The screw may be loose after long-term use. Safety inspection shall be conducted for the whole vehicle before each use!
2. Package with small parts and plastic film is dangerous to children. Please out the package away in time to avoid suffocation and swallowing caused by children playing!
3. Guardians should not leave when children are riding!
4. For the sake of safety, do not disassemble or modify the product by yourself, and do not use the damaged product!
5. The maximum load of this product is 25kg, and the maximum fastener torque is not less than 15N. M!
6. When driving with children, please keep away from the pets and people around, and avoid the third party and self injury caused by collision!
7. Do not mount or dismount curbs.
8. Do not go up or down stairs.

## **WARNING!**

9. In order to ensure the safety of children, this car is only assembled by adults!

10. Users and guardians should read this manual carefully before use and keep it properly for future reference. If the manual is not followed, the safety of children may be affected.

**SCAN THE QR CODE  
FOR THE INSTRUCTION VIDEO**



**SCAN TO WATCH ASSEMBLY**



**IMPORTANT – PLEASE READ THE INSTRUCTIONS  
CAREFULLY BEFORE USE AND KEEP FOR FUTURE  
REFERENCE.**

FOR ANY HELP OR ASSISTANCE, PLEASE CONTACT THE  
FOR YOUR LITTLE ONE TEAM:

☎ TEL: 0121 389 4698

✉ Email: [help@foryourlittleone.com](mailto:help@foryourlittleone.com)

🌐 [foryourlittleone.com](http://foryourlittleone.com)

📘 [foryourlittleone](https://www.facebook.com/foryourlittleone)ltd

📷 [foryourlittleone\\_uk](https://www.instagram.com/foryourlittleone_uk)

🐦 [@ForYourLittle1](https://twitter.com/ForYourLittle1)

📌 [foryourlittleone](https://www.pinterest.com/foryourlittleone)ltd

**Model Number: SJ-BT-16**

