



6" Seam Tape

INSTALLATION SHEET

PRODUCT OVERVIEW

Seam Tape is a double-stick elastomeric tape designed for use with NAC sheet applied or liquid applied Waterproofing Systems.

Seam Tape seals and waterproofs seams, joints, shower curbs, drains, exterior decks and balconies and other protrusions. It is available in 6" x 50' rolls and can be ordered in custom widths. It requires use of NAC TAC, NAC TAC II or NS97 Primer prior to installation. tions, or in areas above living/usable spaces.

FEATURES & BENEFIT

- Suitable for interior and exterior use
- Secures edge seams for a water-tight seal
- Appropriate for thin-bed or thick-bed applications
- Tile can be installed same day as membrane if no flood testing is required
- Excellent companion product for the Extreme Deck System

INSTALLATION

1. Apply the appropriate NAC primer to the area where the Seam Tape and membrane will be installed.
2. Cut Seam Tape to desired length and position with the white release paper facing down and the membrane overlapping Seam Tape by 3".
3. Remove white release paper from the underside and apply Seam Tape to the area that was primed.
4. Use flat side of trowel to press Seam tape into place.
5. Allow first membrane sheet to overlap Seam Tape by 3".
6. Start second membrane sheet over the remaining 3" of tape and butt-jointed next to the first sheet. **DO NOT** overlap membrane sheets.
7. Remove protective film from the top of the Seam Tape and press membrane into Seam Tape.
8. Use flat side of trowel or 75-100# roller to finish membrane installation.
9. For floor to wall installation, flash Seam Tape up wall 3" leaving 3" of Seam Tape on the floor.

INSTALLATION cont.

Image 1:

Floor Installation
butt-joint
membrane
seams



Image 2:

Floor to Wall
Edge Seam

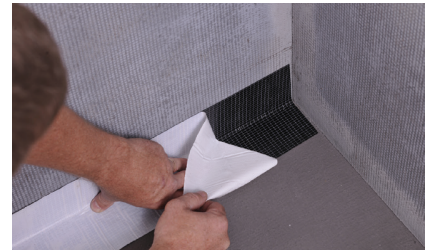


Image 3:

Edge Seam



NAC Primer Reference Chart

NAC	Interior Application			Exterior Application		
	Below Grade	On Grade	Above Grade	Below Grade	On Grade	Above Grade
NAC TAC	✓	✓	✓	✓	✓	✓
NAC TAC II		✓	✓			
NS97				✓	✓	✓

Seam Tape is not a stand-alone product and where exposed must be covered by membrane. Please refer to the individual membrane instructions for complete installation directions.



National Applied Construction Products, Inc.

www.nacproducts.com
800.633.4622 • fax: 330.644.3117