



# CODE LOCK

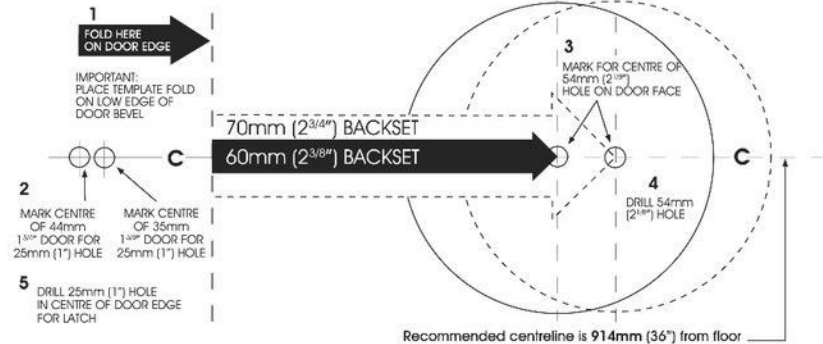


Stick template to door, aligning fold correctly on door edge.



## INSTALLATION INSTRUCTIONS

### Step 1. Mark Door


Using template, mark hole on both sides of door at required backset, then mark latch hole on door edge.



### Step 2. Drill Holes

Bore a 54mm hole on door face, then drill 25mm hole in door edge to intersect with center of 54mm hole.

*Note: Drill 54mm hole from both sides of door to stop wood splintering*




### Step 3. Install Latch


Insert latch into hole and mark a line around edge of latch plate and remove latch. (Fig. 3a)

Chisel approx. 3mm deep or until latch plate sits flush with door edge. (Fig. 3b)


Insert latch then drill 2 x 3mm holes for mounting screws and fasten latch. (Fig. 3c)



(Fig. 3a)



(Fig. 3b)



(Fig. 3c)

### Step 4. Install Strike


Close door and mark horizontal centre of latch on to door frame. Mark vertical line where door edge meets frame and measure in half of door thickness to find vertical centre. (Fig. 4a)

Extend both lines until they intersect and drill a 25mm hole to 15mm depth.


Position strike plate and mark around edge.

Chisel frame to approx 1.5mm depth or until strike sits flush.

Drill 2 x 3mm screw holes and fix strike to frame. (Fig. 4b)




Horizontal Centre Line (Fig. 4a)



(Fig. 4b)

### Step 5. Install Outside Knob


Feed the power cable through latch and guide spindle through until outside rose sits flush.




### Step 6. Install Inside Knob

Feed power cable through hole in knob and guide spindle into handle. (Fig. 6a)

Screw inside knob to outside knob using mounting screws. (Fig. 6b)




(Fig. 6a)



(Fig. 6b)

### Step 7. Plug in Battery Box

Insert power cable into battery box and position box in line with cover screw holes.



### Step 8. Install Inside Cover Plate

Position cover plate over battery box and align with screw holes.

Fasten screws to secure cover plate to inside knob.

