








# 1901

A proud celebration of our heritage, 1901 pays homage to traditional glaze effects. With a rustic structure on the contemporary slim brick format of 245x75mm, 1901 gives the illusion of beautiful, handcrafted qualities. The seductive colour palette takes inspiration from the Astral trend, showcasing rich indigo, sumptuous ruby and bottle green, along with the classic tones of white, black and grey. Named for aspects of our history, this collection creates an opulent, luxurious aesthetic. Front Cover Image: Richards Green Gloss 245x75mm - NIN06A



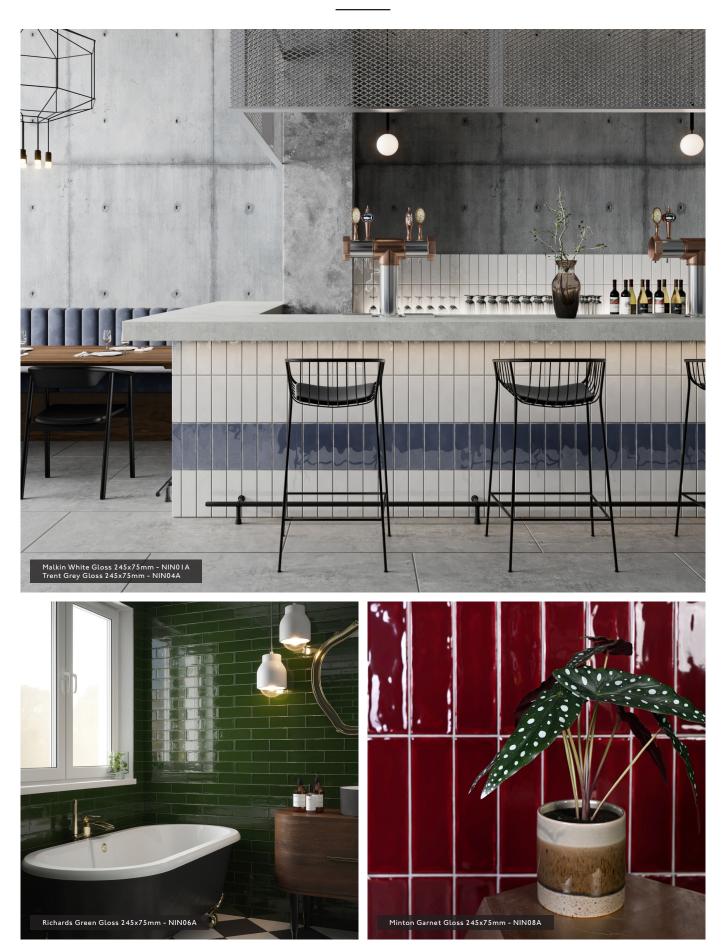



**Colours & Product Codes** 

VI: Low Shade Variation



MALKIN WHITE Product Code: G NINOIA LRV: 83



SHERWIN BISCUIT Product Code: G NIN02A LRV: 79



MARSDEN BLUE Product Code: G NIN03A LRV: 33



TRENT GREY Product Code: G NIN04A LRV: 22



CAULDEN INDIGO Product Code: G NIN09A LRV: 06



JEFFERY MOSS Product Code: G NIN05A LRV: 30



**BOOTE BLACK** Product Code: G NINIOA LRV: 04



RICHARDS GREEN Product Code: G NIN06A LRV: 08



CAMPBELL OCEAN Product Code: G NIN07A LRV: 15




MINTON GARNET G NIN08A LRV: 07

Product Code:




# **Size Formats** Finishes & Availability

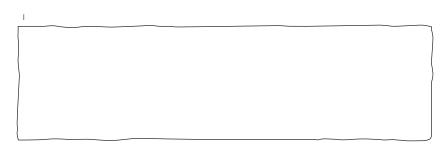

#	Sizes	Finish Type	Colour Availability	Thickness	Pz / Box	M2 / Box	Kg / Box
I	245x75mm	G Gloss	All Colours Shown	8mm	54 Tiles	0.99 m²	16.00 kg

Note: All sizes indicated are metric modular. All dimensions are in millimetres. All sizes shown are nominal. For the most up-to-date availability information, please visit our website. All LRV results are from Johnson Tiles' internal test reports and are to be used for guidance only. LRV: Light Reflectance Value.

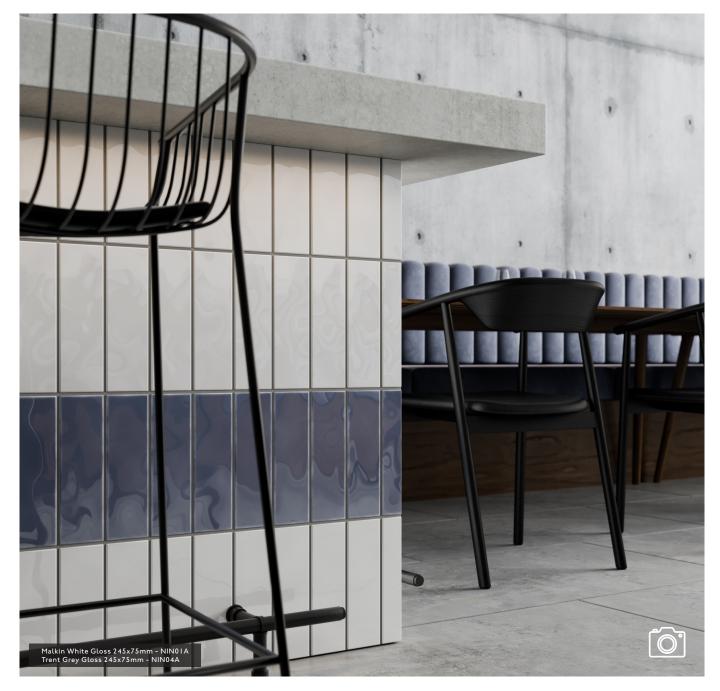



# Specification

Range Size / Finish	Wall Suitability	Floor Suitability	Wet Barefoot	CSV	Material
1901 All Sizes Shown	G Internal Only	-	-	VI	Glazed Ceramic [BIII]

Note: CSV: Colour Shade Variation. Key to Finishes: G Gloss

# **Physical Properties**

Test / Standard	Requirement	Test Result	Test / Standard	Requirement	Test Result
Length / Width EN ISO 10545 - 2	± 0.5% ≤ ± 2mm	± 0.25%	Modulus of Rupture EN ISO 10545 - 4	Min. 15N / mm²	≥ 25N / mm²
→ Thickness ► IN ISO 10545 - 2	± 10% ≤ ± 0.5mm	± 2.5%	Thermal Shock EN ISO 10545 - 9	Pass	Pass
Straightness of Side EN ISO 10545 - 2	±0.3% ≤ ±1.5mm	± 0.15%	<b>Frost Resistance</b> EN ISO 10545 - 12	-	Not Suitable
Rectangularity EN ISO 10545 - 2	± 0.5% ≤ ± 2mm	± 0.4%	Chemical Resistance EN ISO 10545 - 13	Min. Class B	Class A - B
↓Surface Flatness↑↑EN ISO 10545 - 2	± 0.5% ≤ ± 2mm	± 0.3%	Stain Resistance EN ISO 10545 - 14	Min. Class 3	Class C
Water Absorption EN ISO 10545 - 3	10% to 20%	15% to 17%	Fire Rating	-	Class A1 Non Combustible
kg Weight / M <sup>2</sup>	<b>16.13 kg</b> 8mm thick				

Note: All glazed ceramic [BIII] products shown in this range overview conform to BS EN 14411.

#### ✓ Sustainability Information

		EPD	Recycled Content of the Tiles	Recycled Content of the Packaging	Recyclable Content of the Packaging
1901	Glazed Ceramic [BIII]	-	Up to 20%	Up to 100%	Up to 100%

Note: For a full overview of our environmental credentials please visit www.johnson-tiles.com/about/sustainability. EPD: Environmental Product Declaration.

### Important Information

During the manufacturing process of ceramic, vitrified and porcelain tiles, some variation in shade and pattern can occur. Before fixing any tiles; several boxes should be opened and their contents mixed to ensure that size, colour, shade and patterning are acceptable. The tiles shown are quality products and conform to the physical properties listed above.

• All sizes shown are metric modular.

• For specific suitability and fit-for-purpose details please contact our technical helpline.

- Johnson Tiles cannot accept responsibility for any tiles that have been fixed.
- Every effort has been made to ensure the accuracy of the information given.
- Johnson Tiles reserves the right to change specifications and availability without prior notice.
- Nothing in these statements does or will affect the statutory rights of the consumer.

® Johnson Tiles, Johnson, Absolute and Material Lab are registered trademarks and together with Kerastar and product names are the trademarks of H&R Johnson Tiles Limited and licensed to Norcros Group (Holdings) Limited trading as Johnson Tiles. © 2021 Johnson Tiles. All rights reserved.



Product Notes

For more information about 1901 or any of our other product ranges simply visit www.johnson-tiles.com | f ♥ @ 𝖓 in ₽

# Where To Find Us

Johnson Tiles Harewood Street, Tunstall, Stoke on Trent, Staffordshire, ST6 5JZ

Tel: +44 (0)1782 575 575 Fax: +44 (0)1782 577 377 Email: info@johnson-tiles.com

## Samples Enquiries

Tel: +44 (0)1782 524 043 Fax: +44 (0)1782 577 379 Email: samples@johnson-tiles.com

#### Technical Helpline

Tel: +44 (0)1782 524 111 Fax: +44 (0)1782 577 379 Email: techadvice@johnson-tiles.com

Launched: October 2021

