

Using your FlipClips™

ORIGINAL FLIPCLIP™

FLIPCLIP™ X

1. Choose your preferred band configuration/orientation and line up your FlipClips™ accordingly. *Shown in OTT configuration. See TTF instructions below.*

2. Carefully fasten the FlipClip™ to your frame. Take care to ensure the screw is installed straight into the hole to avoid cross threading and keep it loose for now to leave room to insert your bands.

3. Place your band all the way into the FlipClip™ and press/pinch the FlipClip™ firmly to hold the band in place.

4. Tighten the fastener the rest of the way. *Do NOT over tighten. Hand tight is just right.*


5. Carefully stretch your bands while inspecting the attachment point to ensure the bands are securely fastened. Always wear eye protection!

6. Have fun!



OVER THE TOP

The longer side should face the upper side of the forks.

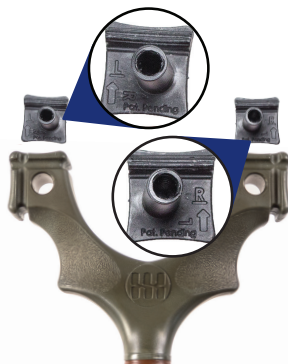

THROUGH THE FORKS

The longer side should face the outside of the forks.



When using FlipClip™ X for Hammer XT only a simple rotation of the component is needed.

IMPORTANT: If you experience a fork hit, please retire your FlipClip™ as it may have suffered damage not visible to the eye... and seriously, don't overtighten the FlipClip™



FlipClips™ work with flat bands of all sizes and looped tubes (please see our YouTube channel for instructions). Proper Installation is critical. Be sure to align the FlipClip™ properly as shown above.

SIMPLESHOT®
EVERYTHING SLINGSHOTS®

simple-shot.com

20190115