

## AKOYA PD321518



FIXTURE DIMENSIONS	L207-1/2" x W3-1/4" x H3-1/4"
LIGHT SOURCE	LED with Remote Driver
WATTAGE	94W
TOTAL LUMENS	6285lm
DELIVERED LUMENS	3140lm*
VOLTAGE	48V DC Input
COLOR TEMPERATURE	3000K
CRI (RA)	90CRI
DIMMABLE	Yes, TRIAC/ELV (Not Included) or 0-10V Dimmer (Optional, Not Included)
DIFFUSER DETAILS	Frosted PC
MATERIAL	Acrylic; Aluminum; Iron;
LOCATION	Dry
CANOPY DIMENSIONS	D2-7/8" x H1-3/8"
REMOTE DRIVER	Powered by DR48-119-UNV-RT Remote Driver (Sold Separately)
PAINT FINISH	CH01


[ D - Diameter, L - Length, W - Width, H - Height, E - Extension ]

### AVAILABLE FINISHES:



PD321518CH  
Chrome



\*For complete warranty terms, please visit: [www.aloralighting.com/warranty](http://www.aloralighting.com/warranty)

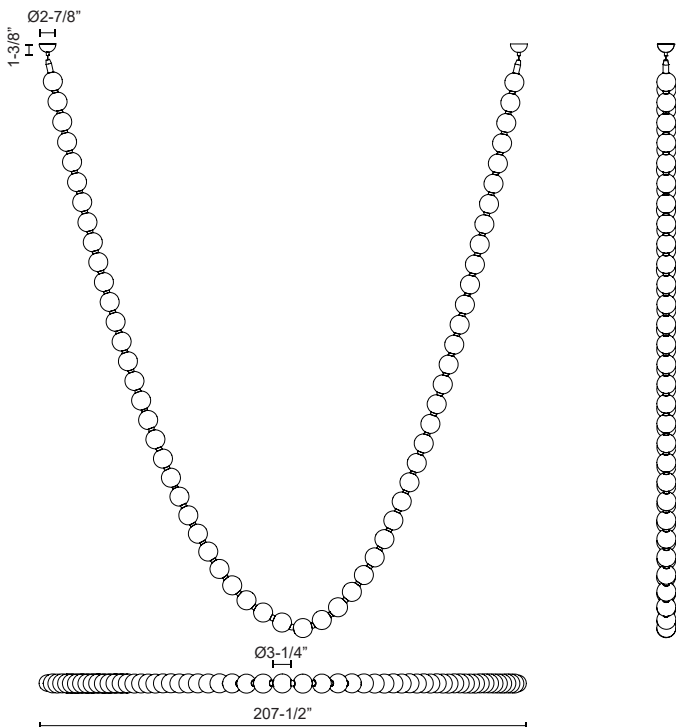

# REMOTE DRIVER DR48-119-UNV-RT

DRIVER

PROJECT

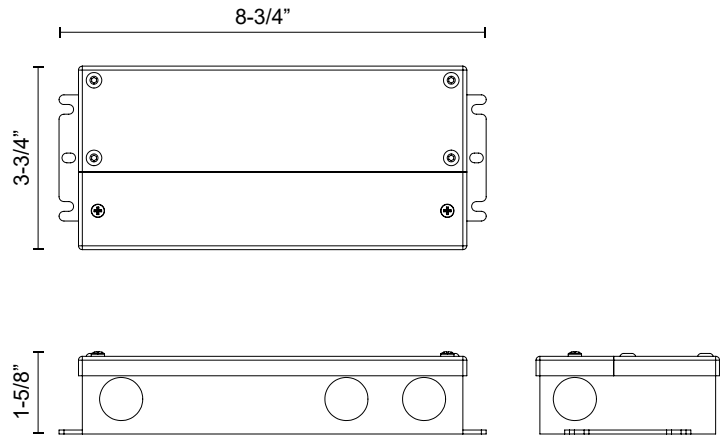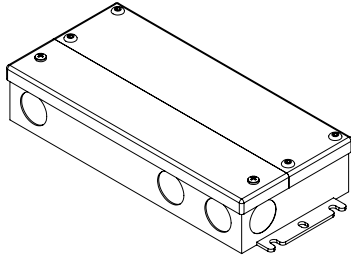

## SPECIFICATION DETAILS

\* For custom options, consult factory for details.

<b>Fixture Dimensions</b>	L8-3/4" x W3-3/4" x H1-5/8"
<b>Wattage</b>	120W
<b>Voltage</b>	120-277V
<b>Output</b>	48V DC, 2.5A
<b>Power Factor</b>	≥0.95
<b>THD</b>	<10%
<b>Dimming</b>	100% - 10% TRIAC or ELV Dimmer (Not Included) or 100% - 10% 0-10V Dimmer (Optional, Not Included)
<b>Certification</b>	cULus, FCC, RoHS
<b>Location</b>	Damp
<b>Weight</b>	3 LBS
<b>Warranty</b>	5 Years
<b>Mounting Orientation</b>	Max 30ft from fixture with 18AWG (See Illustration Sheet for more details)

# alora

19054 28TH AVENUE  
SURREY - BC V3Z 6M3  
CANADA

WWW.ALORALIGHTING.COM

COMMENT

