

Parts Included:

Mounting Strap



Wire Connector



Outlet Box screw




Mounting Screw



CSA / UL Safety Requirements

CSA/UL requires that these IMPORTANT SAFETY INSTRUCTION be listed:

- Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

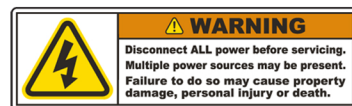

- Consult a qualified electrician if you have any electrical questions or need to replace the driver.

Care Instructions


Arnsberg suggests using only a micro fiber cleaning cloth to clean this fixture. If required, a slightly damp cleaning cloth may be used to spot clean. Do not use common household cleaners on this fixture, as the final finish may be damaged as a result. Enjoy your new Arnsberg fixture.

Arnsberg

customerservice@arnsberg.com

www.arnsberg.com

Mounting Instructions

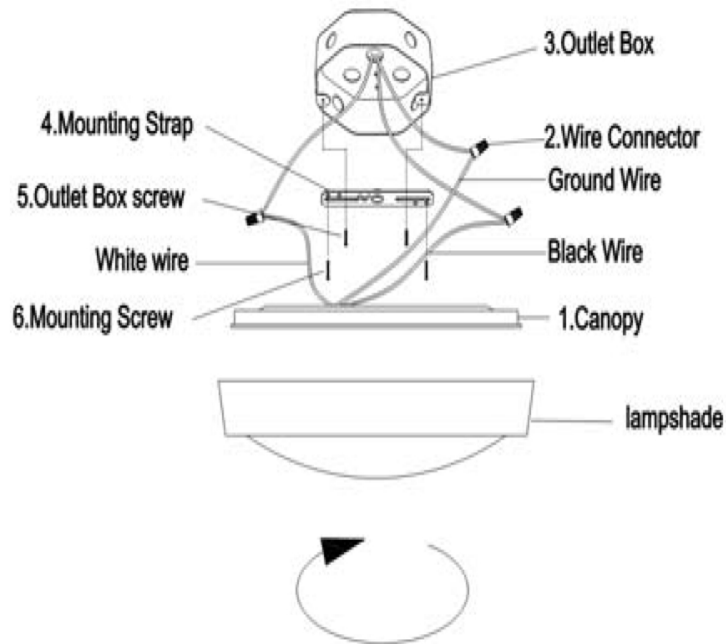

ASSEMBLY INSTRUCTIONS

CLARIMO

659011801

Assembly Instructions

1. Screw the two mounting screws (#6) into the mounting strap (#4). Mount the mounting strap (#4) to the outlet box (#3) using the outlet box screws (#5). Make sure the heads of the mounting screws (#6) are facing outside when the mounting strap (#4) is attached to the outlet box (#3).

2. Connect the ground wire from the fixture to the ground wire from the outlet box (#3). Connect the white wire from the fixture to the white wire (neutral wire) from the outlet box (#3). Connect the black wire from the fixture to the black wire (live wire) from the outlet box (#3). Cover the connections using the wire connectors (#2). Wrap the wire connections with electrical tape for a more secure connection. Position the wires back inside the outlet box (#3). Note: If you have electrical questions, consult your local licensed electrician.

3. Place the canopy (#1) over the outlet box (#3). Allow the heads of the mounting screws (#6) to come out through the large ends of the keyholes. Screw the mounting screws (#6) to secure the canopy (#1).

4. Before completing installation, place the lampshade on the corresponding rotary button of the chassis, and lock the lampshade according to the arrow direction.

5. Installation is complete. Turn on the power at the circuit breaker or fuse box. Turn the light switch on to activate the fixture.