

### Parts Included:

Wire Connector



Outlet Box Screw(#8-32)




Outlet Box Screw(#6-32)



### CSA / UL Safety Requirements

CSA/UL requires that these IMPORTANT SAFETY INSTRUCTION be listed:

- Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.



- Consult a qualified electrician if you have any electrical questions or need to replace the driver.

### Care Instructions

Arnsberg suggests using only a micro fiber cleaning cloth to clean this fixture. If required, a slightly damp cleaning cloth may be used to spot clean. Do not use common household cleaners on this fixture, as the final finish may be damaged as a result. Enjoy your new Arnsberg fixture.

# Arnsberg

customerservice@arnsberg.com


www.arnsberg.com

## ASSEMBLY INSTRUCTIONS

# HONDO

## 228960142

### Mounting Instructions

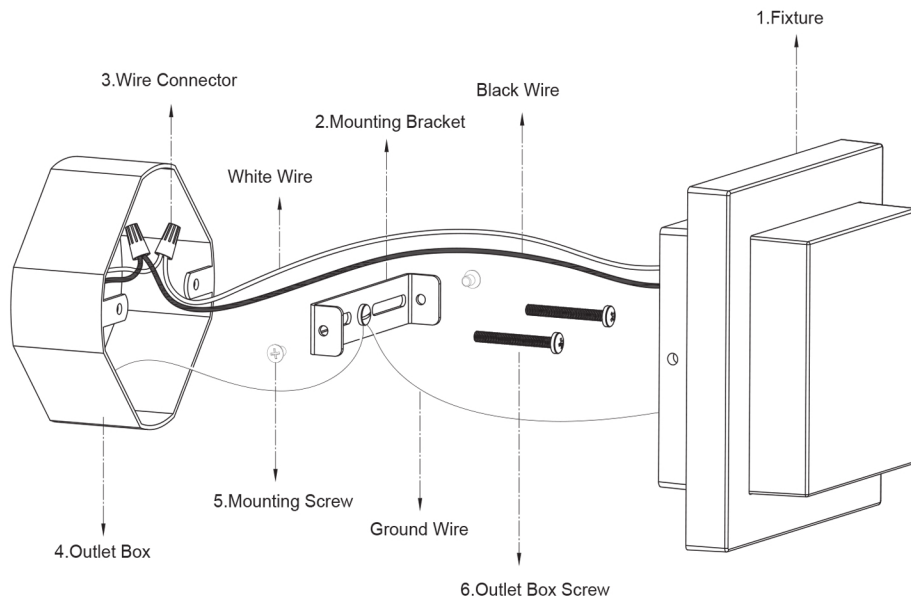

### Assembly Instructions

1. Mount the Mounting Bracket (#2) to the Outlet Box (#4) using the two Outlet Box Screws(#6).
2. Connect the ground wire from the fixture and Outlet Box to the ground screw on the Mounting Bracket (#2). Connect the white wire from the fixture to the white wire (neutral wire) from the Outlet Box (#4). Connect the black wire from the fixture to the black wire (live wire) from the Outlet Box (#4). Cover the connections using the Wire Connectors (#3). Wrap the wire connections with electrical tape for a more secure connection. Position the wires back inside the Outlet Box (#4). Note: If you have electrical questions, consult your local electrical code for approved grounding methods.
3. Please fix the Fixture (#1) to the Mounting Bracket (#2) using the two Mounting Screws (#5).
4. Installation is complete. Turn on the power at the circuit breaker or fuse box. Turn the light switch on to activate the fixture.