


Parts Included:

Wire Connector



Allen wrench



Outlet Box Screw(#8-32)




Outlet Box Screw(#6-32)



CSA / UL Safety Requirements

CSA/UL requires that these IMPORTANT SAFETY INSTRUCTION be listed:

- Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.



- Consult a qualified electrician if you have any electrical questions or need to replace the driver.

Care Instructions

Arnsberg suggests using only a micro fiber cleaning cloth to clean this fixture. If required, a slightly damp cleaning cloth may be used to spot clean. Do not use common household cleaners on this fixture, as the final finish may be damaged as a result. Enjoy your new Arnsberg fixture.

Arnsberg

customerservice@arnsberg.com


www.arnsberg.com

ASSEMBLY INSTRUCTIONS

MISSOURI

228860187

Mounting Instructions:

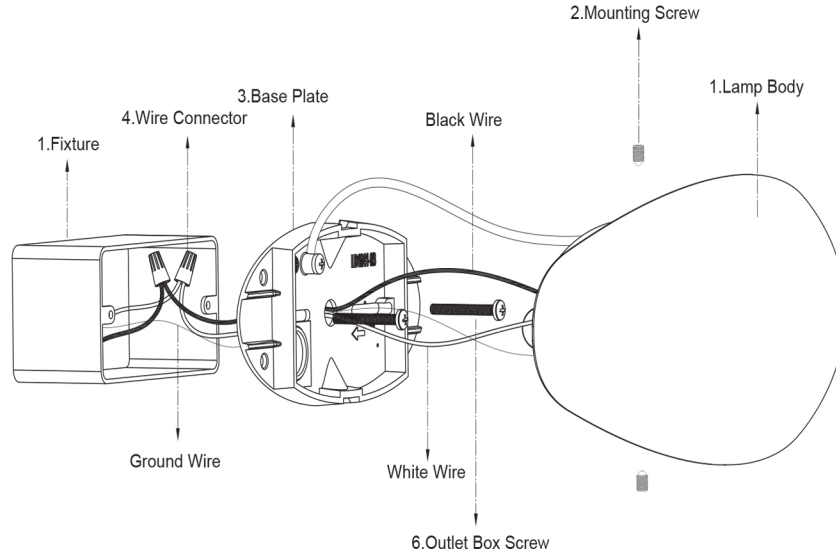

Assembly Instructions:

1. Open the Base Plate(#3).Connect the ground wire from the fixture to the ground screw in the outlet box(#5). Connect the white wire from the fixture to the white wire (neutral wire) from the outlet box (#5). Connect the black wire from the fixture to the black wire (live wire) from the outlet box(#5). Cover the connections using the wire connectors (#4). Wrap the wire connections with electrical tape for a more secure connection. Position the wires back inside the Outlet Box(#5).
Note:If you have electrical questions,consult your local licensed electrician.
2. Mount the base plate(#3) to the outlet box(#5) using the two outlet box screws(#6).
3. Please fix the lamp body(#1) to the base plate(#3) using the two mounting screws(#2).
4. Installation is complete. Turn on the power at the circuit breaker or fuse box. Turn the light switch on to activate the fixture.