

La Linea 2.5mt wall/ceiling

SPECIFICATIONS

LL0001



Design By
BJARKE INGELS GROUP

Collection
Outdoor



Colors & Finishes

White

Materials

- Flexible tube of light capable to freely twist and turn in space
- Illuminated tubes in opaque injection molded PMMA
- Support pins in brushed aluminum


Specifications

Delivered lumens	2400lm
Light output ratio	72.73lm/W
Power consumption	33W
Led type	33W ARRAY
CCT (Correlated Color Temperature)	3000K
CRI (Color Rendering Index)	>90
Life expectancy	50000Hrs
Control type	Dimmable 0-10V
Input Voltage	120-277V
Driver	MEAN WELL - 1 x PWM-90-24
BUG Rating	B0-U0-G0

Features & Accessories

- Suitable for wet location
- Patented optical unit
- Resistant to weather agents and extreme temperatures in the range of -20°C to +40°C
- Driver included: USC-DV1075-LED DRIVER CV PWM AC/DC 90W 24V 3.75A IP67

Dimensions

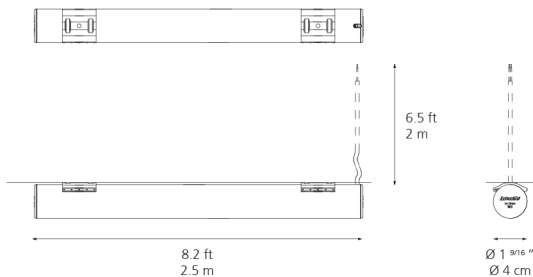

Packaging

2 Boxes

1 x 32" x 32" x 6-3/8" / 15.43 lbs - 81 cm x 81 cm x 16 cm / 7 kg

1 x 31-1/2" x 6-3/8" x 5-3/16" / 1.76 lbs - 29 cm x 16 cm x 13 cm / .8 kg

Light distribution

Diffused

Luminaire weight

9.26 lbs / 4.2 kg

Warranty

5 year limited warranty