

Stellar Nebula 40 suspension

SPECIFICATIONS

0152038A



Design By

BJARKE INGELS GROUP

Collection



Design



Specifications

Delivered lumens	2536lm
Light output ratio	91lm/W
Power consumption	28W
Led type	24W C.O.B.*
CCT (Correlated Color Temperature)	3000K
CRI (Color Rendering Index)	>90
Life expectancy	50000Hrs
Control type	Dimmable 0-10V / Dimmable 2-Wire**
Input Voltage	120-277V
Driver	EFORE - 1 x RCL030-700B

Colors & Finishes

-  Dichroic gradient (diffuser)
-  Polished Aluminum (canopy)

Materials


- Aluminum canopy
- Blown glass diffuser
- Dichroic finishes made with an innovative and sustainable metal vacuum deposition process

*Integrated light source **2-wire dimming at 120VAC only

Features & Accessories

- Integrated driver dual-mode dimming, 2-wire and 0-10V dimming options

Dimensions

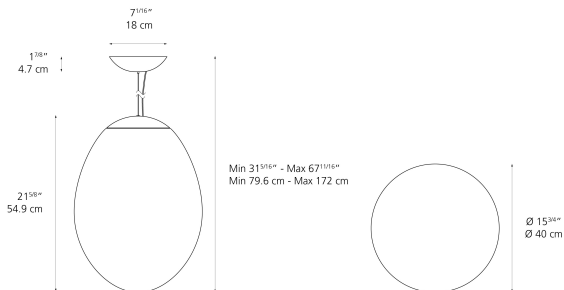

Packaging

1 Box


1 x 22-15/16" x 22-15/16" x 22-9/16" / 19.62 lbs - 58 cm x 58 cm x 57 cm / 8.9 kg

Light distribution

Diffused

Luminaire weight

12.13 lbs / 5.5 kg



Warranty

Red = Max Cd. Through Vertical plane
Blue = Max Cd. Through Horizontal plane