




Ignis 24, brass, walnut, rigid stem

**Ignis 17 / Ignis 24**  
pendant

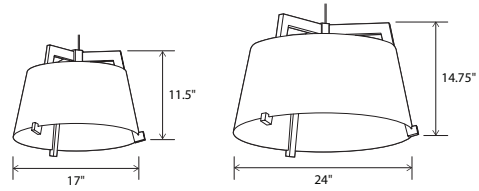

Ignis 17 dimensions: 17" Ø, 11.5"  
 Ignis 24 dimensions: 24" Ø, 14.75"  
 Materials: solid wood, metal  
 Ignis 17 weight: 7 lb  
 Ignis 24 weight: 11 lb  
 Wood grain will vary  
 Specifications subject to change



**Lamping**  
**Integrated LED Specifications**  
 Light output: 1250 Lumens (source)  
 Light color\*: 2700 K or 3500 K  
 Color accuracy: 90+ CRI  
 Power usage: 13 W  
 Input voltage: 120-277 V AC  
 Dimmable: 0-10 V dimming at 120-277 V AC  
 TRIAC and ELV dimming at 120 V AC only

**MATERIAL & FINISH OPTIONS**

	Ignis part # 06-220-	
Fixture Size		
17" Ø	17	
24" Ø	24	
<b>Standard Combinations</b> (Shade, Frame)		
distressed brass, walnut	DW	
distressed brass, dark stained walnut	DD	
brushed brass, walnut	RW	
brushed rose gold, dark stained walnut	GD	
matte black with matte white interior, dark stained walnut	BD	
matte black with matte white interior, white washed oak	BO	
matte black with matte white interior, walnut	BW	
gloss white, white washed oak	WO	
<b>Suspension Type</b>		
corded	C	
rigid	R	
<b>Lamping*</b>		
integrated LED with diffuser - 2700K	L-27 PI	
integrated LED with diffuser - 3500K	L-35 PI	
medium base socket without diffuser	S	
medium base socket with diffuser	D	

**Medium Base E26 Specifications**


Ignis 17 lamping:  
 1x E26 base, type A lamp, 75 W max  
 Ignis 24 lamping:  
 3x E26 base, type A lamp, 75 W max each  
 Bulbs not included  
 Input voltage: 250 V AC max

**Suspension Type**  
**Corded**  
 8'-0" length of SVT wire is used. Wire is field adjustable and suitable for a sloped ceiling.  
**Rigid**  
 Stem comes 6' long and is field cuttable to length (.038" Ø)


**Suspension and Hardware Finish**  
**Standard Combinations**  
 Come with either black or satin nickel suspension, canopy, and sockets:  
 Black: DW, DD, RW, GD, BD, BO, BW  
 Satin Nickel: WO  
**Corded Versions**  
 White cord: satin nickel hardware  
 Black cord: black hardware  
 24" Ignis corded uses a 1/16" Ø steel cable for suspension

*The Ignis and Imber were inspired by the same design principles that make Cerno and ICRAVE well suited to collaborate. Honesty, simplicity, elemental, timeless and quality are words that sit at the core of both companies' design ethos and we believe these light fixtures embrace these qualities well. Each fixture was reduced to its essential parts – frame and shade – highlighting the interplay of the components, and accentuating the clean lines of the form.*

ICRAVE / Cerno

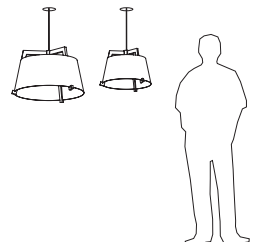

distressed brass (CM-009) dark stained walnut (CM-002) DD  
 brushed brass (CM-047) walnut (CM-001) RW  
 matte black with matte white interior, walnut (CM-001) BW  
 matte black with matte white interior, white washed oak (CM-095) BO  
 brushed rose gold (CM-046) dark stained walnut (CM-002) GD  
 gloss white (CM-054) white washed oak (CM-095) WO

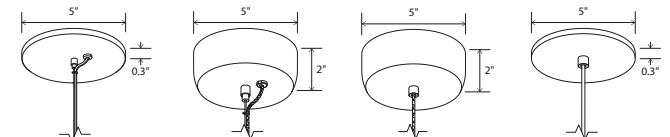


**Ignis 24 with Medium base socket**  
 Low-profile round canopy, SPT with steel cable included  
 Canopy dimensions: 5"Ø, 0.3" deep

**Ignis 24 with LED lamping**  
 Extended-profile round canopy, braided cord with steel cable included, required to house the LED driver (3.25" x 2.25" x 1.25")  
 Canopy dimensions: 5.5"Ø, 2" deep

**Ignis 17 with LED lamping**  
 Extended-profile round canopy, braided cord included, required to house the LED driver (3.25" x 2.25" x 1.25")  
 Canopy dimensions: 5.5"Ø, 2" deep

**Ignis 17 with Medium base socket**  
 Low-profile round canopy, SVT included  
 Canopy dimensions: 5"Ø, 0.3" deep



**Diffuser**  
 Frosted white diffuser (CM-024).  
 Diffuser is recommended when fixture location may allow for direct glare. Integrated LED option always comes with a diffuser

**▲WARNING.** California Proposition 65 Warning for California Consumers. This product can expose you to chemicals including wood dust and lead which are known to the State of California to cause cancer or birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)