

cerno®




DESIGNED AND MADE IN CALIFORNIA

Lex 19 & 28 Pendants



white washed oak

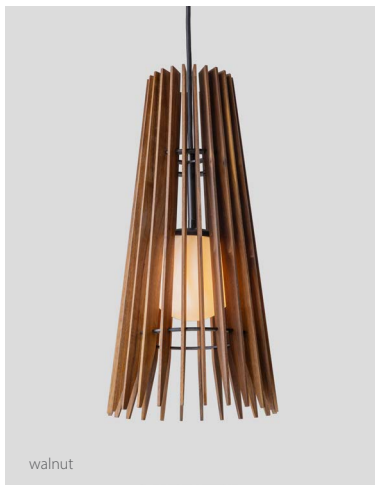


walnut



dark stained walnut

*Lex in Latin is defined as Law, Principle, or Condition. Simple architectural principles guided the design and construction of the Lex pendant. Three primary parts, the light, the hubs, and the wood slats, compose the form, function, and feel. The laws of attraction are often mysterious, and Lex's ability to appear both solid and porous simultaneously creates a sense of intrigue and freshness.*

## Lex 19 pendant

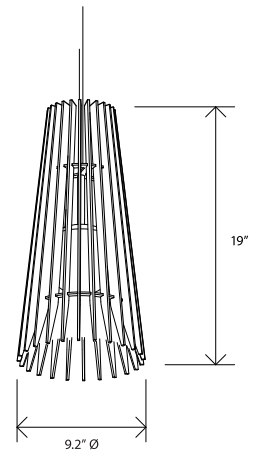

Dimensions: 9.2"Ø, 19" H  
Product weight: 3.5 lb

### Integrated LED Specifications

Light output: 915 Lumens (source), based on 2700 K  
Light color: 2700 K, 3000 K, 3500 K, or 4000 K  
Color accuracy: 90+ CRI  
Power usage: 9 W  
Dimmable (see power options below)

### Candelabra E12 Specifications

Lamping: E12 candelabra, 60 W max, G16.5 frosted lamp recommended  
Bulb not included  
Input voltage: 125 V AC max

Wood grain will vary  
Specifications subject to change



### MATERIAL & FINISH OPTIONS

Lex 19 pendant part # 06-350-

#### Standard Finish Combinations

walnut (CM-001) / black (CM049)  
dark stained walnut (CM-002) / black (CM-049)  
white washed oak (CM-095) / white (CM-060)

WB

DB

OW

#### Lamping

2700 K LED  
3000 K LED  
3500 K LED  
4000 K LED  
candelabra E12 socket

27

30

35

40


CB


#### Driver (LED version only)

120-277 V AC input voltage  
TRIAC, ELV & 0-10 dimming

P1

6' tall person



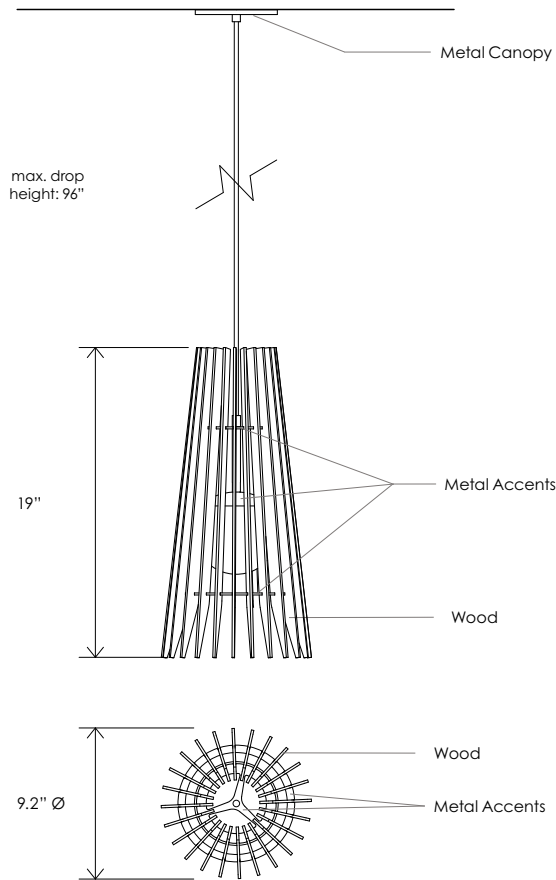

## TECHNICAL SPECIFICATIONS

Dimensions: 9.2" Ø, 19" H  
 Product weight: 3.5 lb

### Integrated LED Specifications


Light output: 915 Lumens (source), based on 2700 K  
 Light color: 2700 K, 3000 K, 3500 K, or 4000 K  
 Color accuracy: 90+ CRI  
 Input Voltage: 120-277 V AC  
 Power usage: 9W  
 Dimmability: TRIAC, ELV & 0-10 V dimming  
 Driver to be housed in canopy  
 Driver dimensions: 3.3" x 1.6" x 1.0", included

### Candelabra E12 Specifications

Lamping: E12 candelabra, 60 W max, G16.5 frosted lamp recommended  
 Bulb not included  
 Input voltage: 125 V AC max  
 Canopy dimensions: 5" Ø x .4"  
 Drop length field adjustable: 0'-14" min, 8'-0" max  
 Suitable for a sloped ceiling up to 45 degrees  
 Specifications subject to change



## PHOTOMETRIC POLAR GRAPH

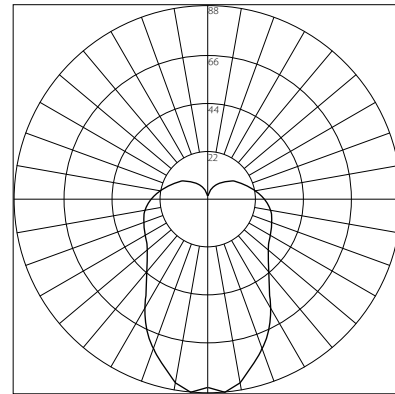

Maximum Candela = 88.27  
 Located at Horizontal Angle = 0, Vertical Angle = 5

Output specifications shown for 2700K CCT and walnut shade with black accents for vertical plane through 0-180 degree horizontal angles. Other CCTs and material finishes may cause output specifications to vary.

## FINISHES



walnut (CM-001)




dark stained walnut (CM-002)



white washed oak (CM-095)



textured black (CM-049)



textured white (CM-060)