

FLOS

FU188044 Anodized Champagne

Coordinates Module Suspension Designed by Michael Anastassiades, 2020

180W - 10230lm - 2700K - CRI> 90



Are you a professional and your project needs consulting and support?



[BOOK AN APPOINTMENT](#)

Main specifications

EAN	8059607034378
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
LED type	LED Module
Power (W)	180
System flux (lm)	10230

Physical

Color	Anodized Champagne
Length (in)	69.37
Cord length (in)	94
Net weight (lb)	19.18
Package volume (in)	3827.41
IP internal	20

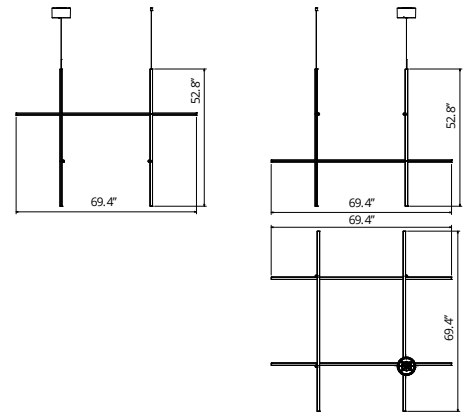

Download

Mounting instructions [↓ PDF](#)

Photometric Files

ULD [↓ ZIP](#)

Technical Drawings

3D [↓ ZIP](#)

Photometric

Lighting type	Total
Light distribution	Asymmetric
CCT (K)	2700
CRI>	90

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	100-240
LED voltage Vf (Vdc)	null
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable Push, Dimmable 1-10V, Dimmable DALI 1
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F



Replaceable (LED only) light source by a professional



Replaceable control gear by a professional