


CARAPACE PENDANT

Installation Guide

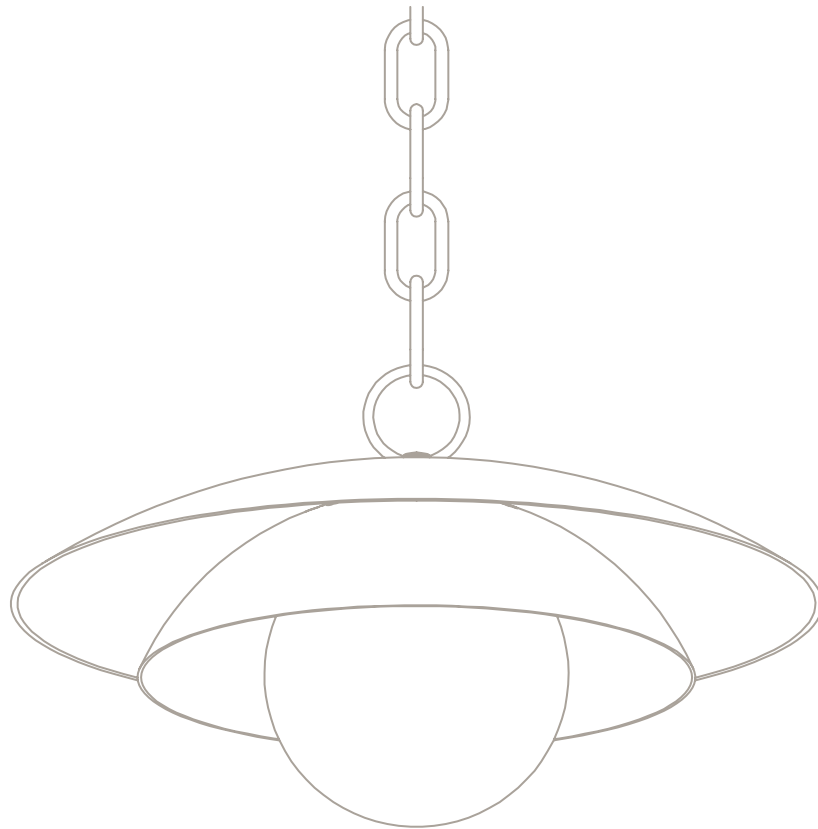

!

Please handle with care and wear gloves at all times during assembly and installation to avoid damaging components.

TECHNICAL

Bulb Holder
240v - 1 x G9
120v - 1 x G9
(no bulbs supplied)


Wattage
25w max (or 2.3w LED 2700k)

Weight
5kg (11lbs)


PARTS & COMPONENTS

- A. 1 x mounting plate
- B. 1 x body with chain and ceiling rose cover
- C. 1 x glass shade


A.



B.

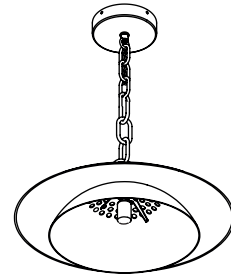

C.




- All nuts and bolts required for assembling the light are included.



BEFORE INSTALLATION

- Check that you have all components before starting the installation.
 - Installation must be carried out by a qualified electrician.
 - A minimum of two people is required to install a pendant light.
- Check that the ceiling or wall fixings are suitable and strong enough to support the weight of the light fixture.
 - You will need the below specific tools for a successful installation.

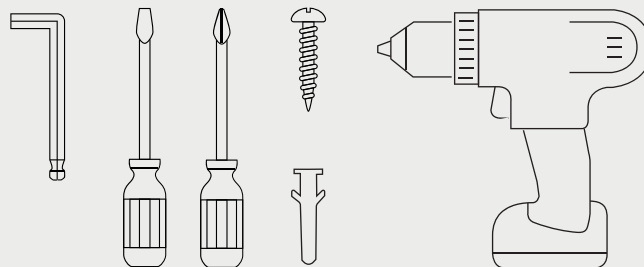


1. Calculate the desired measurement from the ceiling to the bottom of the pendant.

If a reduction of the chain length is required some oval links can be removed to achieve this measurement.



Each oval of the chain is open link, with a small gap in it. Using two sets of pliers either side of the gap, the gap can be widened and the link removed from the chain.

Once the required number of links have been removed, the joining links can be closed and the flex can be threaded up the chain and through the ceiling rose.

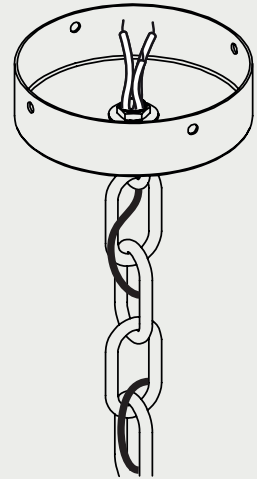



2.
 - A. Fix the mounting back plate to the ceiling. Ensure that suitable screws are being used for the surface that you are mounting to (not supplied)
 - B. Raise the pendant and make the electrical connections.
 - C. Bring the ceiling rose cover up to the mounted plate and secure using provided screws.

Note: Ensure that the chain alone supports the full weight of the pendant. The cable **MUST NOT** support any of the pendant weight.

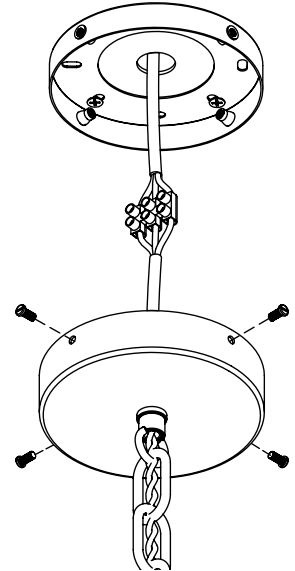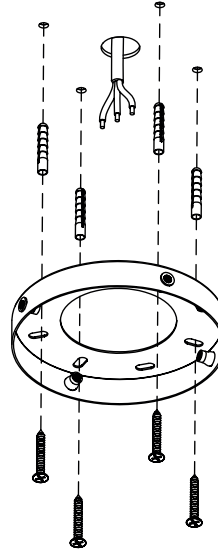


2. 120V US

- A. Fix the mounting plate to the junction box using suitable screws (not supplied).
- B. Raise the pendant and make the electrical connections inside the junction box ensuring all wires are colour matched and the pendant is earthed correctly.
- C. Bring the ceiling rose cover up to the mounted plate and secure using provided screws.

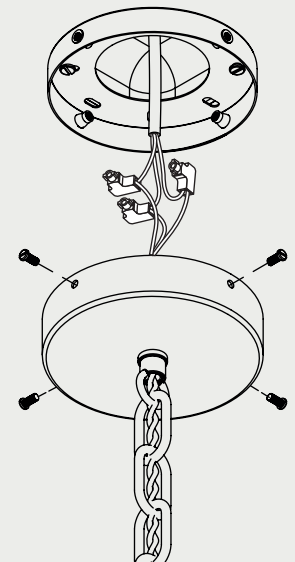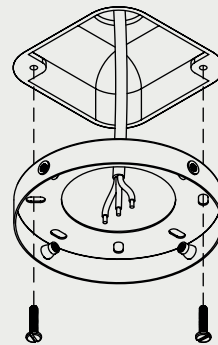

3. Fit the bulb to the lampholder.

Pinch the spring clips inwards and hold, slowly feeding the opal glass shade over the spring clips. Do not release the opal glass shades too quickly.

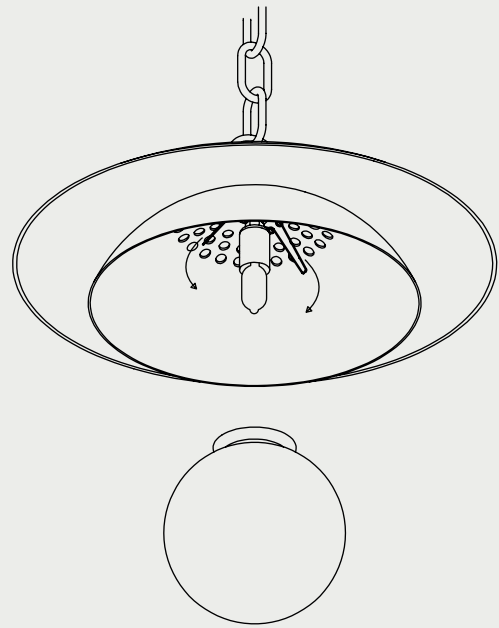**MAINTENANCE****Cleaning**

Dust using a dry lint-free cloth weekly or as required

Repairs

Contact
CTO Lighting

Warranty

Please visit
[www.ctolighting.co.uk/
pages/f-a-q](http://www.ctolighting.co.uk/pages/f-a-q)
for CTO warranty policy

Certification