


## MEZZO FLUSH CEILING / WALL MOUNTED

Installation Guide

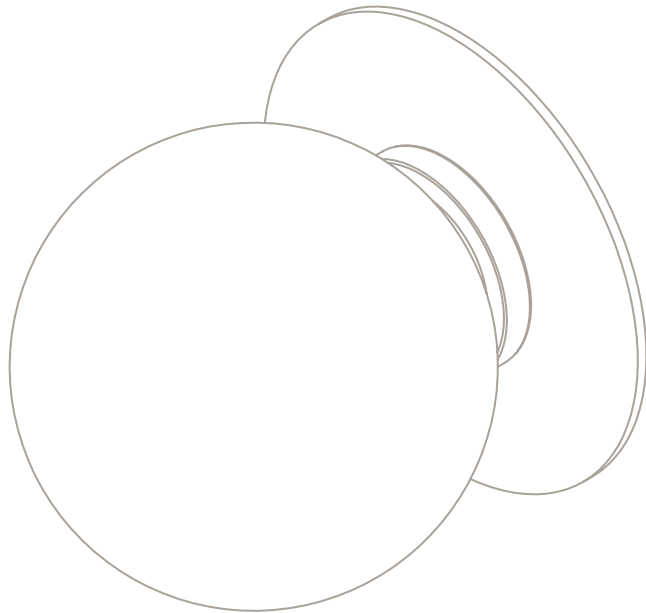

!

Please handle with care and wear gloves at all times during assembly and installation to avoid damaging components.

## TECHNICAL

**Bulb Holder**  
240v - 1 x G9  
120v - 1 x G9  
(bulbs not supplied)


**Wattage**  
25w max halogen  
(or 2.3w LED 2700k)

**Weight**  
1kg (2.2lbs)


## PARTS & COMPONENTS

- A. 1 x Opal glass shade
- B. 1 x Mezzo Flush
- C. 1 x Adaptor plate, 2 x Screws (120V only)


A.



B.



C.




- All nuts and bolts required for the installation will be included in the delivery.




## BEFORE INSTALLATION

- Check that you have all components before starting the installation.
  - Installation must be carried out by a qualified electrician.
  - A minimum of two people is required to install a pendant light.
- Check that the ceiling or wall fixings are suitable and strong enough to support the weight of the light fixture.
  - You will need the below specific tools for a successful installation.

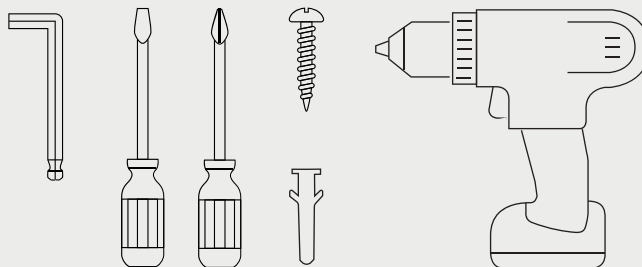


1. 240V  
A. Make the electrical connection between the ceiling/wall and the fitting ensuring all wires are colour matched and the fitting is earthed correctly.




- B. Before mounting the fitting, ensure that the surface being mounted to is flat and smooth to create a secure seal around the back plate.

Fit the backplate to the surface using screws suitable for the surface you are mounting to tightly, creating a secure seal.

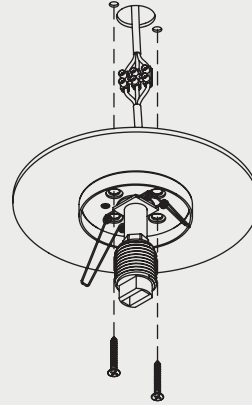


1. 120V  
US A. Fix the adaptor plate to the junction box using suitable screws (not supplied).

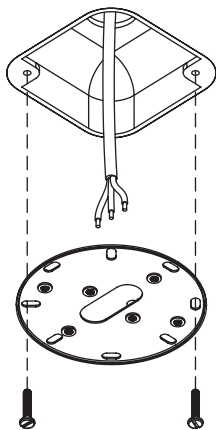

- B. Make the electrical connection between the ceiling/wall and the fitting ensuring all wires are colour matched and the fitting is earthed correctly.


Gently push the electrical connections into the junction box and screw the fitting onto the adaptor plate using the supplied screws.

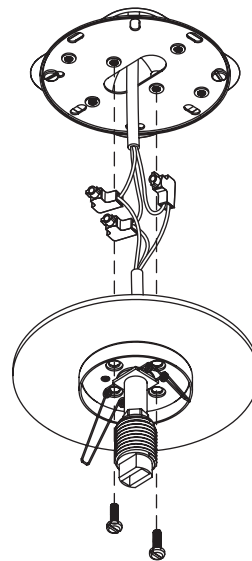

2. Fit the bulb to the lampholder followed by the opal glass shade.

To fit the opal glass shade, gently pinch the spring clips inwards and push the glass over the brass cap.

Do not release the glass shade too quickly as this may damage the fitting.

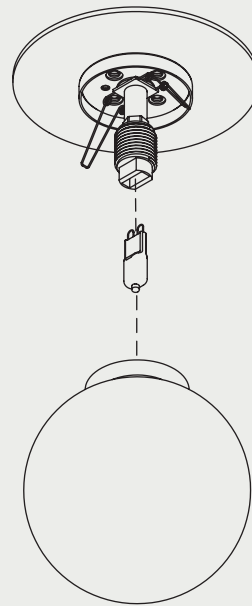

## MAINTENANCE

### Cleaning

Dust using a dry lint-free cloth weekly or as required

### Repairs

Contact  
CTO Lighting

### Warranty

Please visit  
[www.ctolighting.co.uk/  
pages/f-a-q](http://www.ctolighting.co.uk/pages/f-a-q)  
for CTO warranty policy

### Certification



IP44 240V only