

WAC LIGHTING

Dot

Ceiling Mount

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
FM-W57806 6"	2700K	BK Black	10W	878	574
	3000K	SS Stainless Steel	10W	878	574
	3500K		10W	878	574

Example: **FM-W57806-35-SS**

For custom requests please contact customs@waclighting.com

FEATURES


- Lightweight, injection-molded, UV-rated acrylic diffuser enhances brightness, safety lock prevents slippage
- 277V option available for 9", 12" & 15" sizes (special order)
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- 3CCT switch installs within the junction box
- Option to pre-select color temperature or adjust in the field
- ACLED driverless technology
- 5 year warranty

SPECIFICATIONS


Color Temp:	2700K,3000K,3500K
Input:	120 VAC,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% ,TRIAC: 100-10%
Rated Life:	50000 Hours
Mounting:	Can be mounted on ceiling or wall in all orientations
Standards:	ETL, cETL,IP65,Title 24 JA8 Compliant,Energy Star 2.0 Wet Location Listed
Construction:	Weather-resistant 316 stainless steel body with thick acrylic shade



FINISHES:



LINE DRAWING:

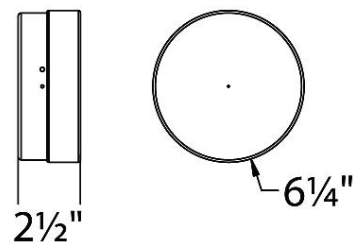

FM-W57806

WAC LIGHTING

Dot

Ceiling Mount

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
FM-W57809 9"	2700K	BK Black	17W	1571	1070
	3000K	SS Stainless Steel	17W	1571	1070
	3500K		17W	1571	1070

Example: **FM-W57809-35-SS**

•For 277V special order, add an "F" before the finish: FM-W57809F-27-BK

For custom requests please contact customs@waclighting.com

FEATURES


- Lightweight, injection-molded, UV-rated acrylic diffuser enhances brightness, safety lock prevents slippage
- 277V option available for 9", 12" & 15" sizes (special order)
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- 3CCT switch installs within the junction box
- Option to pre-select color temperature or adjust in the field
- ACLED driverless technology
- 5 year warranty

SPECIFICATIONS


Color Temp:	2700K,3000K,3500K
Input:	120 VAC,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% ,TRIAC: 100-10%
Rated Life:	50000 Hours
Mounting:	Can be mounted on ceiling or wall in all orientations
Standards:	ETL, cETL,IP65,Title 24 JA8 Compliant,Energy Star 2.0 Wet Location Listed
Construction:	Weather-resistant 316 stainless steel body with thick acrylic shade



FINISHES:



LINE DRAWING:

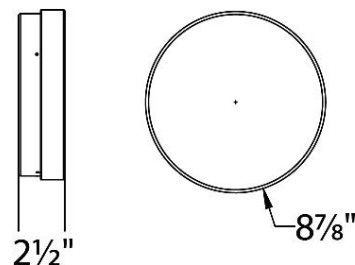

FM-W57809

WAC LIGHTING

Dot

Ceiling Mount

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
FM-W57812 12"	2700K	BK Black	27W	2566	1482
	3000K	SS Stainless Steel	27W	2566	1482
	3500K		27W	2566	1482

Example: **FM-W57812-35-SS**

•For 277V special order, add an "F" before the finish: FM-W57812F-35-SS

For custom requests please contact customs@waclighting.com

FEATURES


- Lightweight, injection-molded, UV-rated acrylic diffuser enhances brightness, safety lock prevents slippage
- 277V option available for 9", 12" & 15" sizes (special order)
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- 3CCT switch installs within the junction box
- Option to pre-select color temperature or adjust in the field
- ACLED driverless technology
- 5 year warranty

SPECIFICATIONS


Color Temp:	3000K,2700K,3500K
Input:	120 VAC,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% ,TRIAC: 100-10%
Rated Life:	50000 Hours
Mounting:	Can be mounted on ceiling or wall in all orientations
Standards:	ETL, cETL,IP65,Title 24 JA8 Compliant,Energy Star 2.0 Wet Location Listed
Construction:	Weather-resistant 316 stainless steel body with thick acrylic shade



FINISHES:



LINE DRAWING:

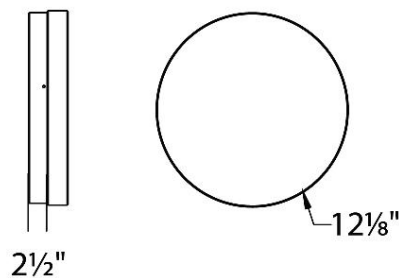

FM-W57812

WAC LIGHTING

Dot

Ceiling Mount

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
FM-W57815 15"	2700K	BK Black	31W	2400	1773
	3000K	SS Stainless Steel	31W	2400	1773
	3500K		31W	2400	1773

Example: **FM-W57815-35-SS**

•For 277V special order, add an "F" before the finish: FM-W57815F-35-SS

For custom requests please contact customs@waclighting.com

FEATURES


- Lightweight, injection-molded, UV-rated acrylic diffuser enhances brightness, safety lock prevents slippage
- 277V option available for 9", 12" & 15" sizes (special order)
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- 3CCT switch installs within the junction box
- Option to pre-select color temperature or adjust in the field
- ACLED driverless technology
- 5 year warranty

SPECIFICATIONS

Color Temp:	3500K,2700K,3000K
Input:	120 VAC,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% ,TRIAC: 100-10%
Rated Life:	50000 Hours
Mounting:	Can be mounted on ceiling or wall in all orientations
Standards:	ETL, cETL,IP65,Title 24 JA8 Compliant,Energy Star 2.0 Wet Location Listed
Construction:	Weather-resistant 316 stainless steel body with thick acrylic shade



FINISHES:



LINE DRAWING:

