

Purpose built for applications where surface-mounted downlights are preferred, the Exo family of fixtures offers a variety of solutions with a perfect balance of function and fashion. With several size & shape options ranging from a simple cube to elongated rectangular shades, the Exo family yields the ultimate in minimalist form while secretly concealing a specification-grade, multifunction downlight within. Each LED module's high-performance output is harnessed by your choice of four field changeable optics ranging from a precise 20° beam perfect for task-oriented applications to a wide 60° beam ideal for general illumination-minded applications. Additional precision control is offered by way of integrated 0°-30° tool-free beam aiming. Finally, a truly customized look can be achieved throughout the entire Exo family by selecting one its three decorative recessed trim color options.

Each LED module produces 1047 delivered lumens while consuming 14 watts of power, and is offered in standard CCTs of 2700K, 3000K and 3500K. Light output is harnessed by your choice of 20°, 30°, 40° or 60° field changeable optics, and each fixture includes a 120-277 universal voltage driver which is also universally dimmable (low-voltage electronic, Triac and 0-10v dimming) for maximum jobsite flexibility.

**Product features**

- Four shade sizes for maximum design and performance flexibility
- Complementary pendant and flushmount versions available
- Specification grade beam spread options for spot to general illumination applications
- Unique tool-free aiming for incredible versatility
- Universally dimmable LED lamping options to create the desired ambiance
- Sleek rectangular shades for a truly minimalist look
- Matte Black and Matte White finish options
- Three decorative trim options for a custom look
- 5-year warranty

**SPECIFICATIONS**

SHADE HEIGHT	6.1", 18", 36" options
SHADE WIDTH	5.2"
SHADE LENGTH	5.2" single / 10.4" dual
DELIVERED LUMENS	1047 single / 1635 dual
WATTS	14 single / 28 dual
VOLTAGE	Universal 120-277v
DIMMING	Universal 0-10v, ELV, Triac
LIGHT DISTRIBUTION	20°, 30°, 40°, 60° field changeable optics
MOUNTING OPTIONS	Ceiling (flush, 12", 24", 36", 48" stem)
ADJUSTABILITY	Spot module: 35° tilt and 360° rotation with tool-free locking Pendant: integrated ball joint that accommodates sloped ceilings up to 45°
CCT	2700K, 3000K, 3500K
CRI	90+
COLOR BINNING	3-Step
GENERAL LISTING	ETL, Title 24
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Steel
FINISH	Matte Black, Matte White
TRIM	Black, White, Gold Haze
LED LIFETIME	50,000 to L70
WARRANTY*	5 years



EXO DUAL  
shown in black/gold haze




EXO PENDANT  
shown in white/black 36"



EXO CEILING  
shown in white/white 18"

\* Visit [techlighting.com](http://techlighting.com) for specific warranty limitations and details.

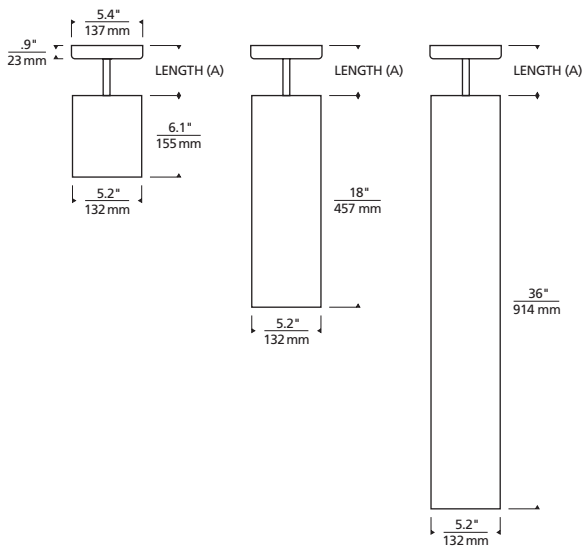

Black/Black  
6"



Black/Black  
18"



Black/Black  
36"



White/Black  
6"



White/Black  
18"



White/Black  
36"



Black/Gold Haze  
6"



Black/Gold Haze  
18"



Black/Gold Haze  
36"



White/Gold Haze  
6"



White/Gold Haze  
18"



White/Gold Haze  
36"



Black/White  
6"



Black/White  
18"



Black/White  
36"




White/White  
6"



White/White  
18"



White/White  
36"

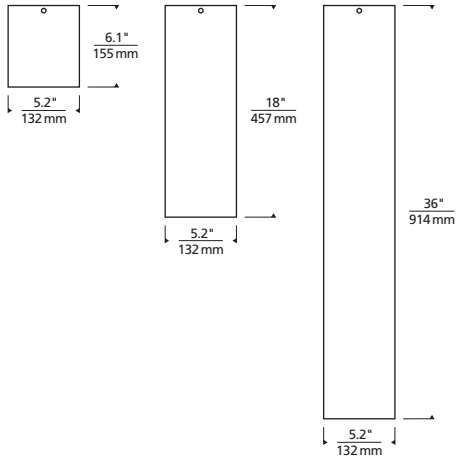

Black/Black  
6"



Black/Black  
18"



Black/Black  
36"



White/Black  
6"



White/Black  
18"



White/Black  
36"



Black/Gold Haze  
6"



Black/Gold Haze  
18"



Black/Gold Haze  
36"



White/Gold Haze  
6"



White/Gold Haze  
18"



White/Gold Haze  
36"



Black/White  
6"



Black/White  
18"



Black/White  
36"




White/White  
6"



White/White  
18"



White/White  
36"



Black/Black



White/Black



Black/Gold Haze



White/Gold Haze



Black/White



White/White



PHOTOMETRICS\*

\*For latest photometrics, please visit [www.techlighting.com](http://www.techlighting.com)

EXO SINGLE PENDANTS & CEILING

Description: LED Multiples Module  
40° Beam - 0° Tilt, 3000K  
Model: LED Multiples 40° Low  
Input Power (Watts): 12.4  
Input Power Factor: 0.98  
Absolute Luminous Flux (Lumens): 1056  
Lumen Efficacy (Lumens per Watt): 85.2

ANGLE	0°	45°	90°
0°	2188	2188	2188
5°	2137	2136	2106
10°	1956	1938	1893
15°	1633	1608	1536
20°	1206	1175	1082
25°	736	705	632
30°	377	362	318
35°	179	174	151
40°	82	81	74
45°	42	42	39
50°	24	23	22
55°	14	13	12
60°	8	8	8
65°	5	5	5
70°	2	2	2
75°	1	0	0
80°	0	0	0
85°	0	0	0
90°	0	0	0

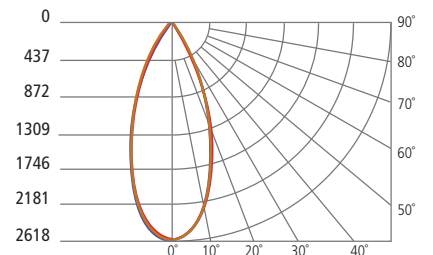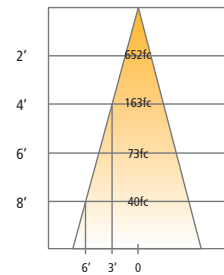

ORDERING INFORMATION

EXO PENDANTS

700TDEXOP	SHADE HEIGHT	STEM LENGTH (A)	BEAM SPREAD	SHADE COLOR / HARDWARE FINISH	TRIM FINISH	LAMP
	6 6.1"	12 12"	20 20°	<b>B</b> MATTE BLACK	<b>B</b> BLACK	<b>-LED927</b> LED 90 CRI 2700K 120V 277 UNV
	18 18"	24 24"	30 30°	<b>W</b> MATTE WHITE	<b>G</b> GOLD HAZE	<b>-LED930</b> LED 90 CRI 3000K 120V 277 UNV
	36 36"	36 36"	40 40°		<b>W</b> WHITE	<b>-LED935</b> LED 90 CRI 3500K 120V 277 UNV
		48 48"	60 60°			

EXO CEILING

700FMEXO	SHADE HEIGHT	BEAM SPREAD	SHADE COLOR	TRIM FINISH	LAMP
	6 6.1"	20 20°	<b>B</b> MATTE BLACK	<b>B</b> BLACK	<b>-LED927</b> LED 90 CRI 2700K 120V 277 UNV
	18 18"	30 30°	<b>W</b> MATTE WHITE	<b>G</b> GOLD HAZE	<b>-LED930</b> LED 90 CRI 3000K 120V 277 UNV
	36 36"	40 40°		<b>W</b> WHITE	<b>-LED935</b> LED 90 CRI 3500K 120V 277 UNV
		60 60°			

EXO DUAL

700FMEXOD	SHADE HEIGHT	BEAM SPREAD	SHADE COLOR	TRIM FINISH	LAMP
	6 6.1"	20 20°	<b>B</b> MATTE BLACK	<b>B</b> BLACK	<b>-LED927</b> LED 90 CRI 2700K 120V 277 UNV
		30 30°	<b>W</b> MATTE WHITE	<b>G</b> GOLD HAZE	<b>-LED930</b> LED 90 CRI 3000K 120V 277 UNV
		40 40°		<b>W</b> WHITE	<b>-LED935</b> LED 90 CRI 3500K 120V 277 UNV
		60 60°			

LENSES/LOUVERS

	TYPE	FINISH
<b>MOC</b>	<b>GG</b> PLAIN GLASS	<b>-B</b> BLACK
	<b>SF</b> SOFT FOCUS	<b>-W</b> WHITE
	<b>LL</b> LINEAR SPREAD	
	<b>EC</b> EGGCRATE LOUVER	
	<b>LS1</b> 1" LONG SNOOT	
	<b>LS12</b> 1/2" LONG SNOOT	

MOC \_\_\_\_\_

PROJECT INFO

FIXTURE TYPE & QUANTITY	JOB NAME & INFO	NOTES
_____	_____	_____
_____	_____	_____

