


GLIDEAIRE™



FPD8520** 52" Ceiling Fan

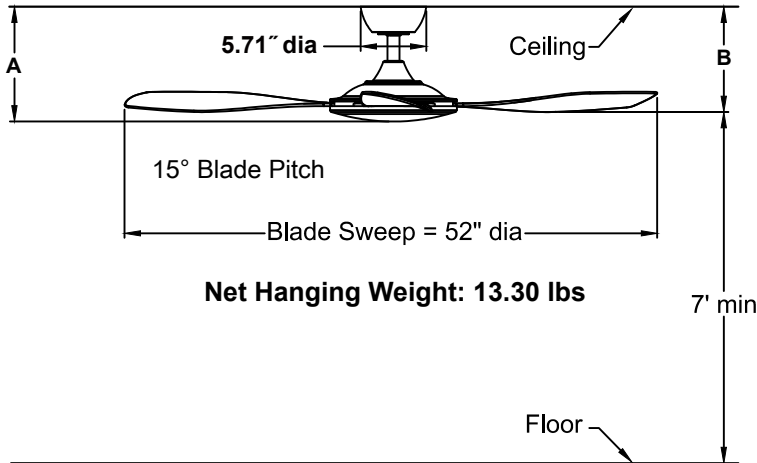

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

158 x15 sensorless DC motor is designed for optimal performance with this fan.

BLADES:

A set of three 22" composite blades is included.

CONTROL OPTIONS:

A WiFi receiver and TR205D hand-held remote control are included. Push button remote control with 16 fan speeds, fresh air, reverse, infinite light levels, fan/light timer, home away, safe exit and off button. Visit the Apple APP Store or Google Play Store to download the free fanSync WiFi APP and create your Fanimation fanSync account. Optional TW206D wall control is available — sold separately. Instructions are provide with each control.

DOWNROD OPTIONS:

Fan comes with 1" dia. x 4.5" long downrod (DR1-4.5). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 19°. Most sloped ceiling installations require a standard 18" downrod or longer downrod. Optional sloped ceiling kits (SCK1-52) are available for up to 42°. Optional close-to- ceiling kit is available as well —sold separately. Call technical support for more information.

LOCATION USE:

Fan is rated for dry and damp locations. This fan is for rooms up to 400 sq ft.

	A	B
Fan w/4.5" downrod	9.98"	9.15"
Fan w/12" downrod	17.48"	16.65"
Fan w/18" downrod	23.48"	22.65"
Fan w/24" downrod	29.48"	28.65"
Fan w/36" downrod	41.48"	40.65"
Fan w/48" downrod	53.48"	52.65"
Fan w/60" downrod	65.48"	64.65"
Fan w/72" downrod	77.48"	76.65"

Available Finishes	
BNBN	Brushed Nickel with Brushed Nickel
BNBL	Brushed Nickel with Black
BL	Black with Black

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High (16 th)	173	5538	215	0.36	26
Med (9 th)	105	3371	456	0.11	7
Low (1 th)	28	538	192	0.05	3

Energy Guide FTC			
Power (W _{ave})	Total Air Delivery (CFM _{ave})	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
17	3746	5	218