GENERATION LIGHTING

Chandelier

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.


Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.

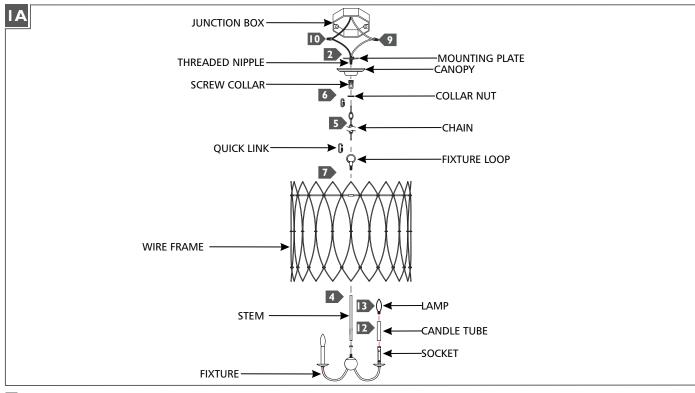

- If necessary, screw the shorter end of the threaded nipple tightly onto the mounting plate.
- 2 Secure the mounting plate to the junction box.
- Temporarily unscrew and remove the collar nut, then screw the screw collar tightly onto the threaded nipple.
- 4 Place the spacer onto the fixture and secure in place by screwing the stem onto the fixture. Then Place the wire frame over the stem and secure it in place by screwing the loop onto the stem.
- Install a quick link onto the end of the chain and fixture loop. Determine the wanted height of the fixture and remove a portion of the chain by opening a link and removing it from the top.
- Install the collar nut and canopy onto the chain (in that order), then install the other quick link onto the free end of the chain and screw collar.
- Weave the cord through the chain, screw collar, canopy, threaded nipple, and out of the junction box. Trim the cord leaving enough to make electrical connections.
- Connect the fixture to a suitable ground in accordance to local electrical codes.
- Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- Neatly place all the wires into the junction box, place the canopy onto the ceiling, and secure it in place by screwing the collar nut tightly onto the screw collar.
- Install the candle tube by sliding it over the socket.
- Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage information.

SAVETHESE INSTRUCTIONS!

GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077 800.969.3347

www. generation lighting. com

© 2019 Generation Lighting. All rights reserved.

The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.