GENERATION LIGHTING

Chandelier

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.


GENERATION LIGHTING


7400 Linder Ave, Skokie, IL 160077 800.969.3347

www.generationlighting.com

© 2019 Generation Lighting. All rights reserved.

The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.

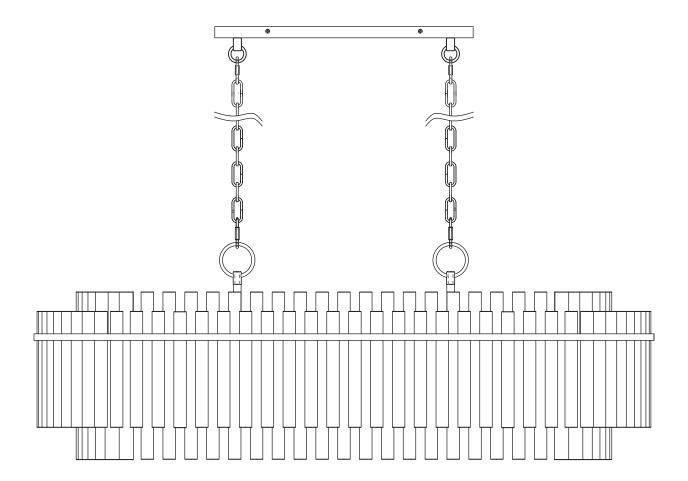

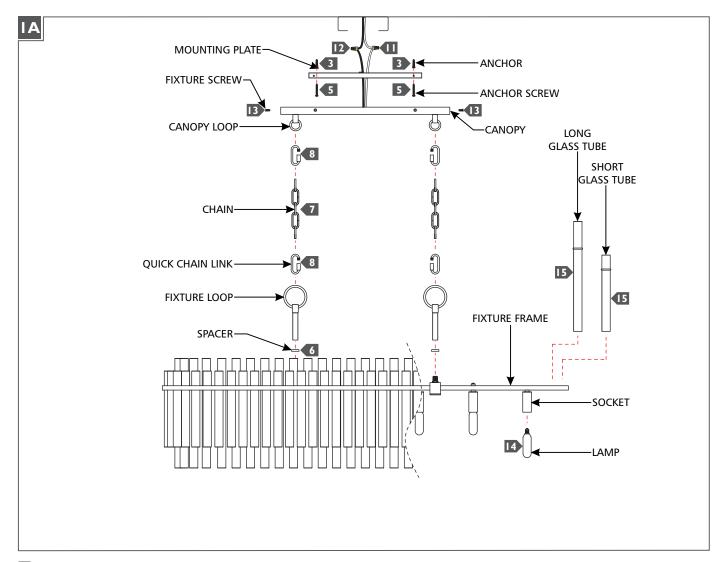

- Temporarily install the mounting plate to the junction box.
- 2 Mark the anchor hole locations on the mounting plate and remove the mounting plate.
- 3 Drill appropriate size holes at the marked locations and install the anchors.
- 4 Secure the mounting plate to the junction box.
- **5** Screw the anchor screws into the anchors.
- 6 Feed the fixture wires through the spacer and fixture loop, then screw both fixture loops onto the fixture.
- Determine the wanted height of the fixture and remove a portion of the chain by opening a link with pliers.
- Install a quick link onto the chain and fixture loop, then install another quick link to the other end of the chain and canopy loop. Repeat steps 7 and 8 for the other side.
- 9 Weave the cord through the chain, canopy, and out of the electrical box. Trim the cord leaving enough to make electrical connections.
- Connect the fixture to a suitable ground in accordance to local electrical codes.
- Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- Neatly place all the wires into the electrical box, place the canopy onto the mounting plate, and secure it in place by screwing in the fixture screws.
- Screw the lamps into the sockets. Refer to the label on the lamp socket for Max Wattage information.
- Install the long glass tubes around the inner part of the fixture frame, then install the short glass tubes around the outer part of the fixture frame.