

Installation Instructions for

Dottie Large Flush mount

KSF1024 | **1.0**

GENERATION LIGHTING FLUSH MOUNT

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.


This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


Use minimum 90°C supply conductors.

SAVE THESE INSTRUCTIONS!

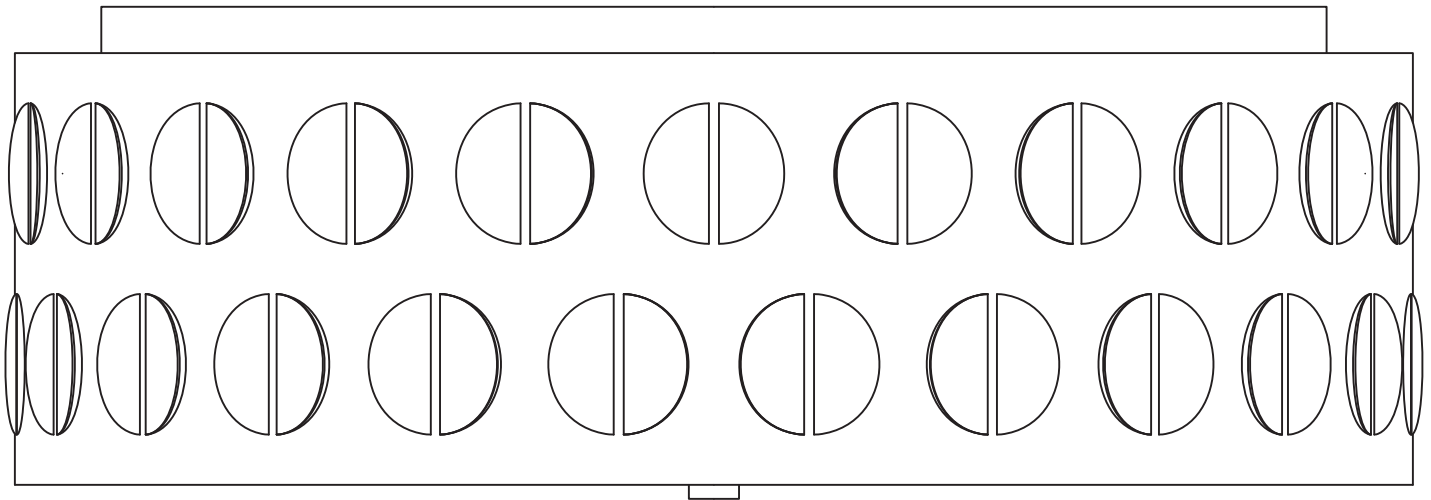

GENERATION LIGHTING
7400 Linder Ave., Skokie, IL 60077
T 847.410.4400 | F 847.410.4500
www.generationlighting.com

Install the Fixture

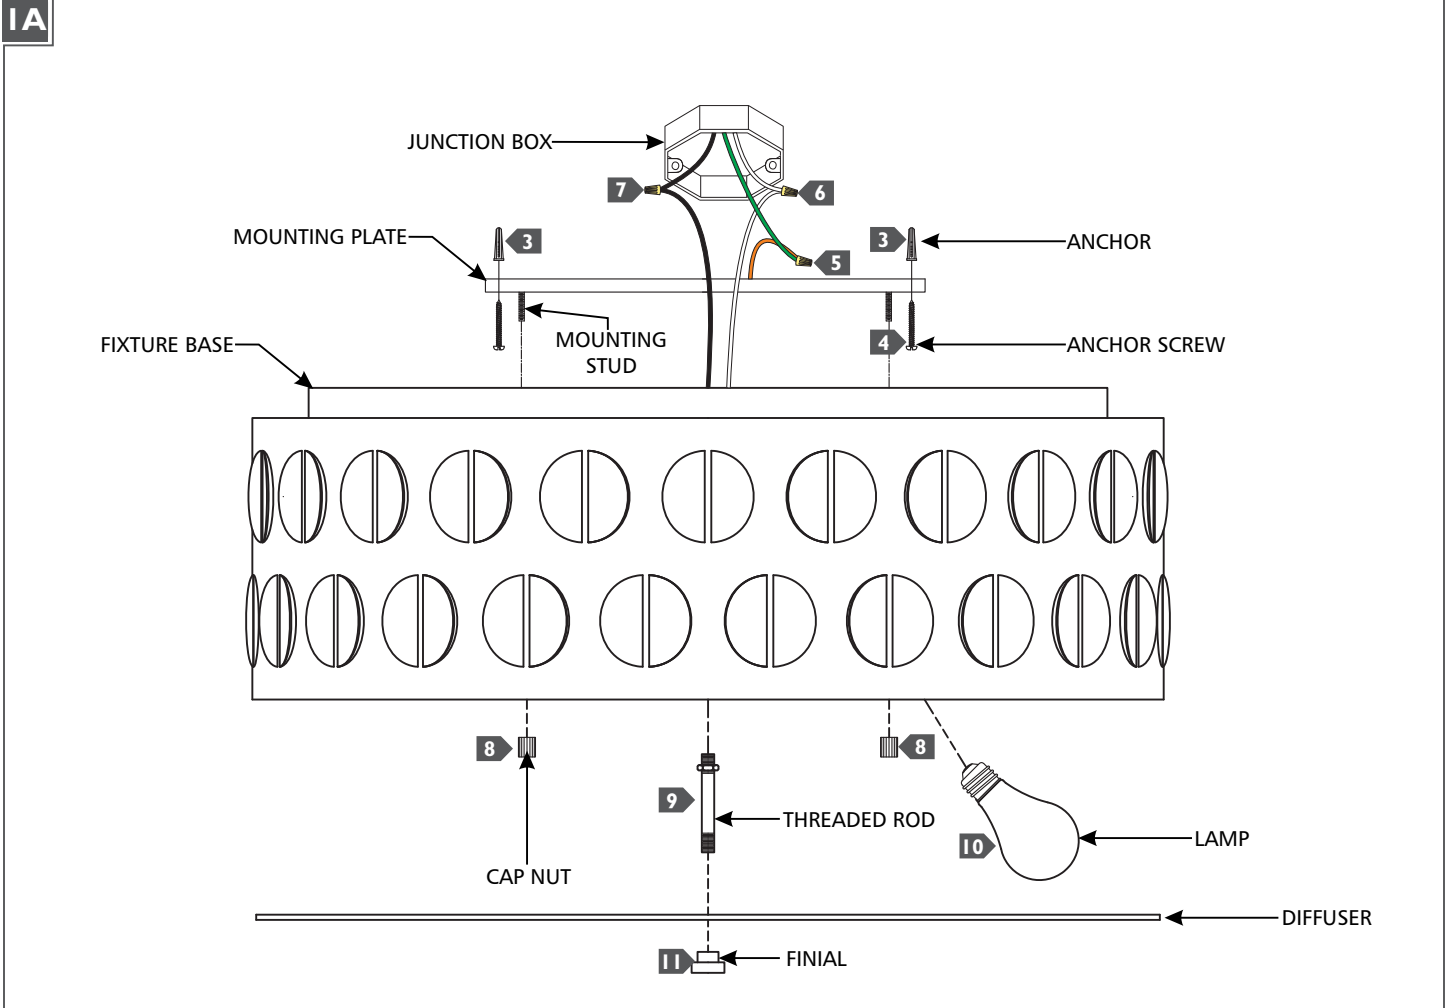

- 1 Temporarily install the mounting plate to the junction box.
- 2 Mark the anchor locations through the holes on the mounting plate. Remove the mounting plate.
- 3 Drill appropriate sized holes at the marked locations and install the anchors.
- 4 Secure the mounting plate to the junction box and screw the anchors screws into the anchors.
- 5 Connect the fixture to a suitable ground in accordance with local electrical codes.
- 6 Connect the white fixture wire to the neutral power line wire with a wire nut.
- 7 Connect the black fixture wire to the hot power line wire with a wire nut.
- 8 Neatly tuck the wiring into the junction box, place the fixture base onto the mounting studs, and secure it in place with cap nuts.
- 9 Screw the threaded rod into the bottom of the socket assembly.
- 10 Screw the lamps into the sockets. Refer to the label on the socket for max wattage information.
- 11 Lift the diffuser on to the threaded rod and secure it in place by screwing the finial to the threaded rod.