

Katie Chandelier

LC1006, LC1018 | 1.0

GENERATION LIGHTING

Chandelier

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.

CAUTION - RISK OF FIRE
 This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
 Use minimum 90°C supply conductors.


GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077

800.969.3347

www.generationlighting.com


© 2019 Generation Lighting. All rights reserved.
 The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.

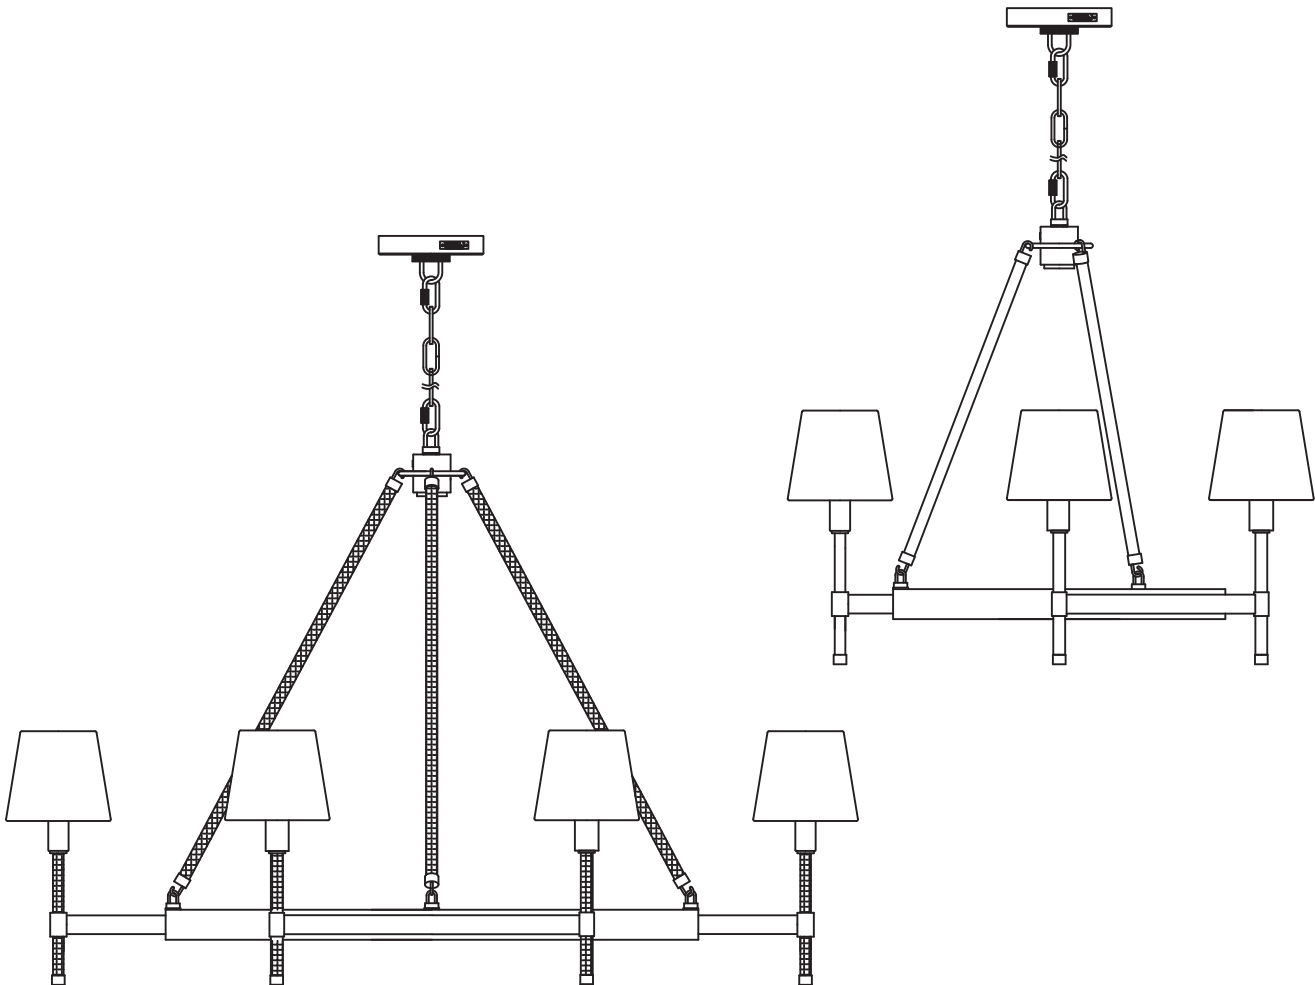

SAVE THESE INSTRUCTIONS!

Install the Fixture

IA

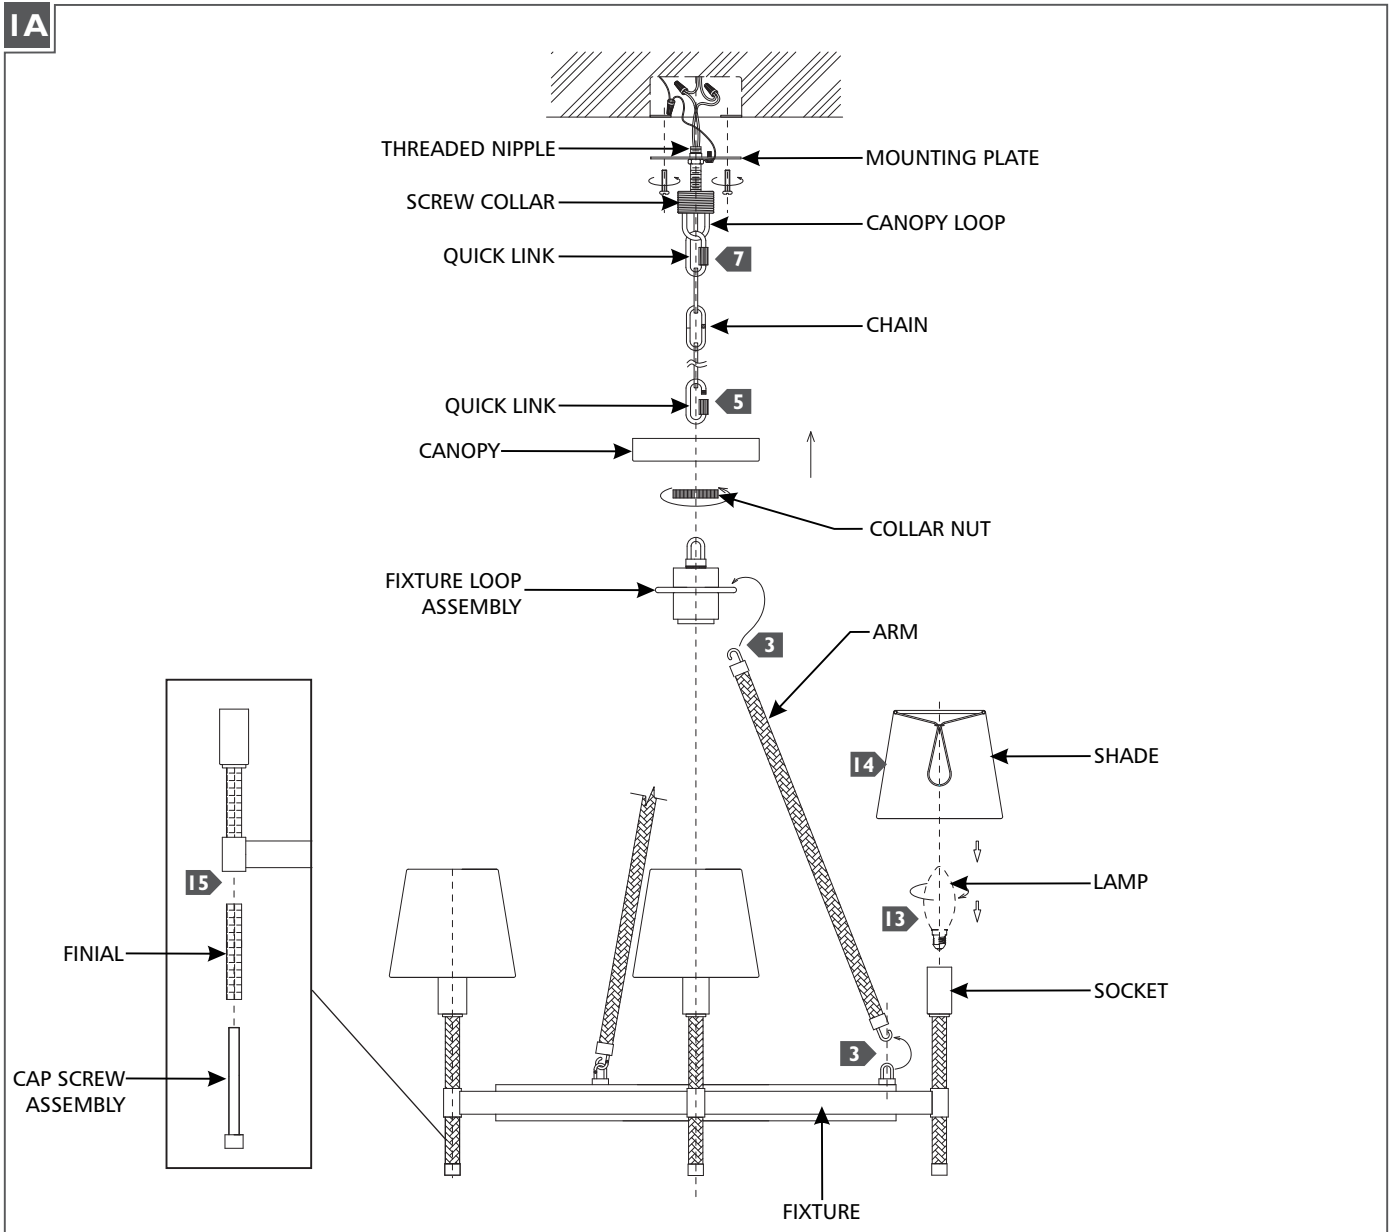

- 1** If necessary, screw the short end of the threaded nipple tightly onto the mounting plate, then screw the screw collar onto the threaded nipple.
- 2** Secure the mounting plate to the junction box.
- 3** Install the fixture arms by connecting one end to the fixture and the other to the fixture loop assembly. Repeat for remaining arms.
- 4** Determine the wanted height of the fixture and remove a portion of the chain from the bottom by opening a link with pliers.
- 5** Install a quick link to bottom end of the chain, then secure the quick link onto the fixture loop.
- 6** Unscrew the collar nut from the screw collar, then install the collar nut and the canopy onto the chain (in that order).
- 7** Install a quick link onto the remaining end of the chain, then secure the quick link onto the canopy loop.
- 8** Weave the cord through the chain, collar nut, and canopy, threaded nipple, and out of the junction box. Trim the cord leaving enough to make electrical connections.
- 9** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 10** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 11** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 12** Neatly place all the wires into the junction box, place the canopy onto the mounting plate, and secure it in place by screwing the collar nut tightly onto the screw collar.
- 13** Screw the lamps into the sockets. Refer to the label on the lamp socket for Max Wattage information.
- 14** Install the shade by placing it over the lamp. Repeat for remaining shades.
- 15** Screw the finials to the bottom of the fixture and secure it in place using the cap screw assemblies ensuring that the seam of the finials face the center of the fixture for best appearance.