

# Glass Installation Instructions

Erlenmeyer Floor Lamp 247810 & 247810C



## To Install Bulb & Glass (Figure 1)

### Component Parts

- A Fixture
- B Pin
- C Glass
- D Thumbscrews (4)

1. Carefully unpack the lamp from the carton.
2. Install bulb into socket. *Bulb is included with the "C" version only.*
3. Loosen thumbscrews (D) . It is not necessary to remove thumbscrews.
4. Slip glass (C) into ring aligning groove in glass with thumbscrews (D) and tighten thumbscrews (D). Do not overtighten.
5. Glass maybe be rotated to a variety of angles. While holding glass, remove pin (B) and orient glass into desired position. Replace pin (B) thru tab and engage with gear.

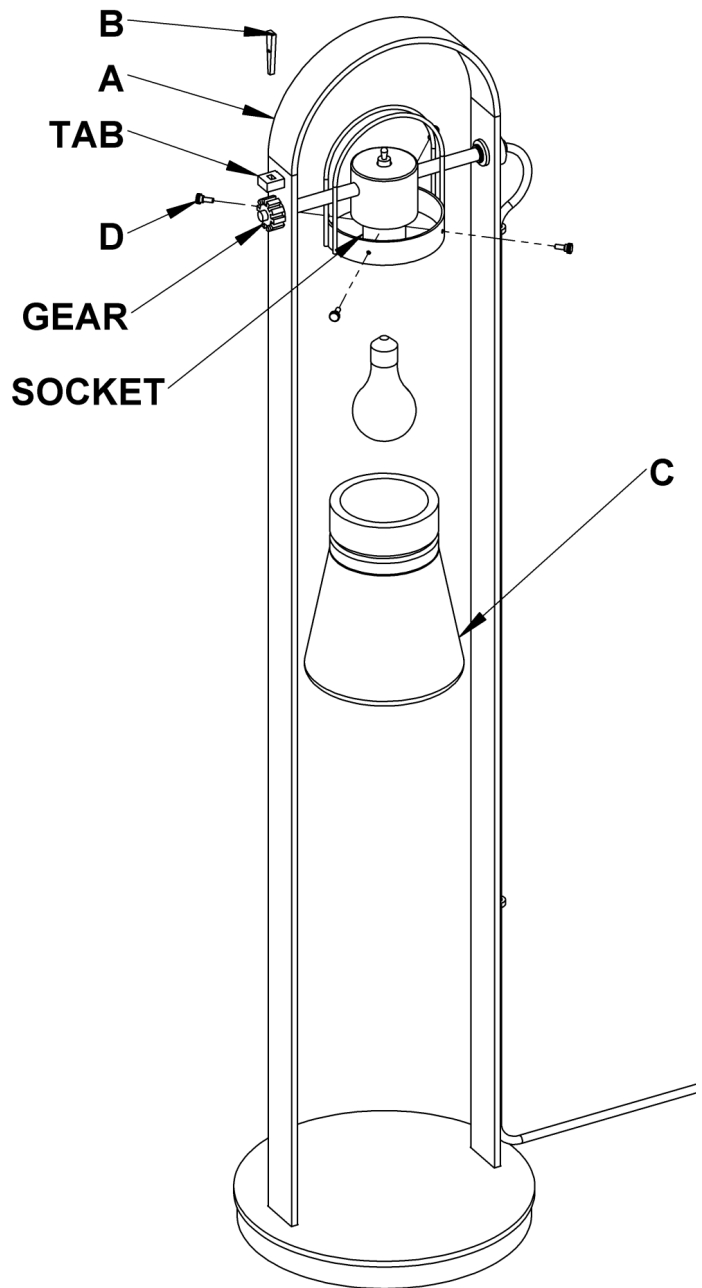


Figure 1

*If you need further assistance, or find that you are missing any parts, please contact the dealer from which you purchased this product. We hope you enjoy your fixture!*

\* Hubbardton Forge will not be liable for injury or damage caused by improper installation, lamping or use of this fixture.

## A note about California State Statute Title 20



The California Energy Commission has established the Title 20 Code of Regulations. This statute's primary intention is to reduce energy consumption in the home.

Title 20 requires that all portable lamps sold within the State of California after January 1, 2010 shall have high efficiency lighting sources. The statute allows for a number of compliance options including Compact Fluorescent Bulbs (CFL), LED light sources, and the new GU-24 lighting platform.

Your product will include one of these new lighting sources as a result of Hubbardton Forge's compliance with California's Title 20.

For additional information regarding the California Statute Title 20, please refer to the California energy website <http://www.energy.ca.gov/siting/title20>.