

KEGLEN

9.8 IN / LED 3000K / 120-277V/60HZ / Black / Black textile and wire / - / Phase+dim 0-10v / - / 10000151376

The pendants distinctive conical shades each have a built-in curved opal insert. This ensures a both attractive and glare-free downward light. Each version of the shade provides its own diffusion of light while the white inner side ensures that its light is reflected flawlessly. A gentle light is also emitted upwards through a uniform, discreet opening in the top of the shades which adds to the perfect ambiance.



Jakob Lange - BIG Ideas



Product info

Environmental Product Specification

This product is compliant with the requirements contained in the European Directives, RoHS Directive 2011/65 and 2015/863. This product is designed so that 100% of the product can be disassembled and reused.

Information

Electrical: System Wattage: 6W, 8W, 21W or 31W LED Wattage: 5W, 7W, 19W, or 29W Delivered lumens: 276 - 2,254 lm Efficacy: 50 lm/W - 73 lm/W Certifications: cULus, Damp location Controllability: 0-10V Dimming Color Rendering: Ra \geq 90

Mounting

Suspension type: 1x black stainless steel aircraft cable. Cord type: 18 AWG braided fabric covered power cord. Cord length: 12'. Black canopy and cord for black pendant, white canopy and cord for white pendant.

Finish

Black or white, matte, wet painted.

Materials

Shade: Spun aluminum. Diffusor: Injection molded PC.

Sizes and weight

Width x Height x Length (in.) | 15.7 x 10.6 x 15.7 Max 10.8 lbs | 6.9 x 5.3 x 6.9 Max 5.4 lbs | 9.8 x 10.6 x 9.8 Max 3.7 lbs | 25.6 x 10.6 x 25.6 Max 14.5 lbs

Compliance

cULus, Damp location.

Specification notes


a. 6.9 IN size available only in 6W. B. 9.8 IN size available only in 8W. c. 15.7 IN size available only in 21W. d. 25.6 IN size available only in 21W. d. White variants come with white cord and canopy, black variants come with black cord and canopy.

Light source

LED 3000K
Lumen: 390

Information

Electrical:
System Wattage: 6W, 8W, 21W or 31W
LED Wattage: 5W, 7W, 19W, or 29W
Delivered lumens: 276 - 2,254 lm
Efficacy: 50 lm/W - 73 lm/W
Certifications:
cULus, Damp location
Controllability: 0-10V Dimming
Color Rendering: Ra \geq 90

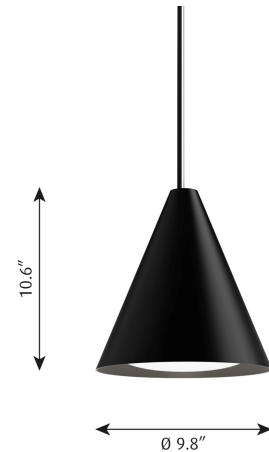

Product family



Keglen Table




Keglen Wall




Keglen Floor

Light distribution diagrams


Cartesian

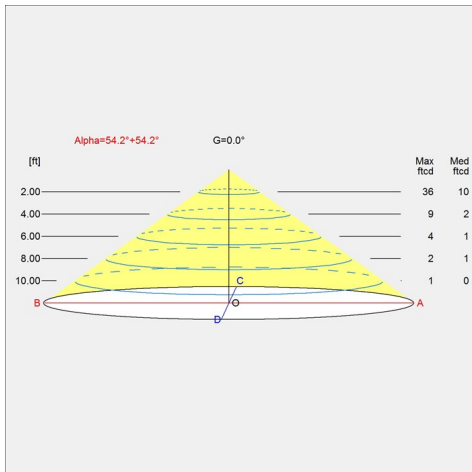

Isolux

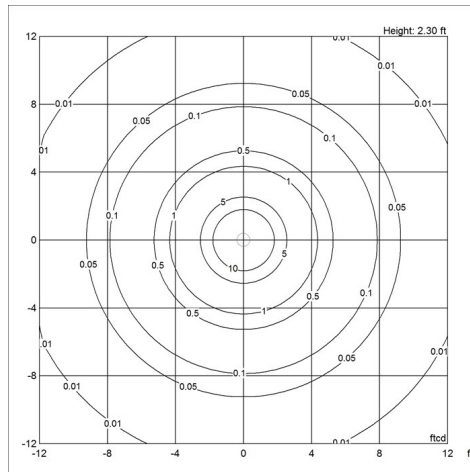

Polar

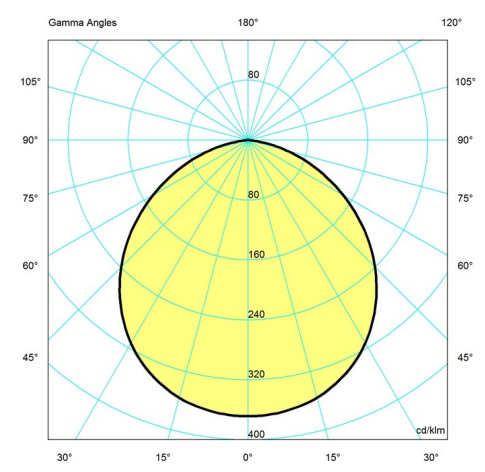

Spare parts & accessories

| Product | Variant number |
|---------------------------|----------------|
| CANOPY SHADE BLACK KEGLÉN | 10000151814 |
| CANOPY SHADE WHITE KEGLÉN | 10000151815 |

Data specifications

| | | | |
|-----------------|--------------|-------------------------------------|-------------|
| Colour | Black | Length | 9.8 |
| Width | 9.8 | Height | 10.6 |
| Built-in Height | - | IP class | 20 |
| Class | - | Net Weight | 3.7 |
| Standby (W) | - | Power Factor (P = 100 % / P = 50 %) | - |

| | |
|-------------------------|------------------------|
| Inrush Current | - |
| Kelvin | 3000 |
| SDCM | 3 |
| Watt | 8.0 |
| Light control | Phase+dim 0-10v |
| UGR Transversal / Axial | 19.0/19.0 |
| Driver life | - |

| | |
|--------------------|-----------------------------|
| Light source | Keglen LED 3000K |
| CRI | 90 |
| Lumen | 390 |
| Efficacy | 49 |
| Min. Dim Level (%) | 10 |
| L80B50 (hours) | - |