



KEGLEN WALL

LED 2700-2000K D2W / Black / Blk / - / - / - / 5743914377

The wall lamp's distinctive conical shade has a built-in curved diffuser. This ensures an attractive and glare-free light. A gentle light is also emitted upward through a discreet uniform opening in the top of the shade to create a perfect ambiance. The fixture can be mounted facing downward to direct the light to a specific spot, or upward for indirect light.

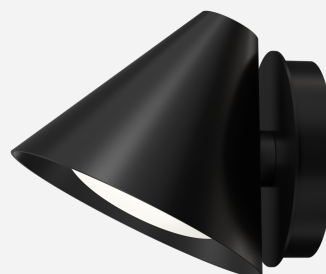

Jakob Lange - BIG Ideas



Product info

Information

Multi-function button switch: tap for switching on/off; press and hold for continuous dimming. May be disabled for on/off operation by remote wall light switch. An integrated memory function ensures that the lamp will return to its last dim level when turned on. Head can rotate +/- 45° sideways. Electrical: System Wattage: 9W LED Wattage: 8W Delivered lumens: 338 - 484 Efficacy: 40 lm/W - 57 lm/W (LED) Certifications: cULus, Dry Location Protection class IP20 Controllability: Continuous dimming by integrated button switch. Color Rendering: Ra \geq 90 Dim-to-warm LED CCT: 2700K at 100%; 2000K at max dim.

Mounting

Mounted directly to finished surface over a 4" octagonal junction-box. Switch: push button switch on the top wall box. Electronic LED driver is housed inside the wall box.

Finish

Black or white, matte, wet-painted.

Materials

Shade: Spun aluminum. Diffusor: Injection molded PC.

Sizes and weight

Width x Height x Length (in.) | 6.9 x 5.6 x 7.4 Max 1.8 lbs

Compliance

cULus, Dry location.

Light source

LED 2700-2000K D2W

Lumen: 338

Information

Multi-function button switch: tap for switching on/off; press and hold for continuous dimming. May be disabled for on/off operation by remote wall light switch. An integrated memory function ensures that the lamp will return to its last dim level when turned on.

Head can rotate +/- 45° sideways.

Electrical:

System Wattage: 9W

LED Wattage: 8W

Delivered lumens: 338 - 484

Efficacy: 40 lm/W - 57 lm/W (LED)

Certifications:


cULus, Dry Location

Protection class IP20

Controllability: Continuous dimming by integrated button switch.

Color Rendering: Ra \geq 90

Dim-to-warm LED CCT: 2700K at 100%; 2000K at max dim.

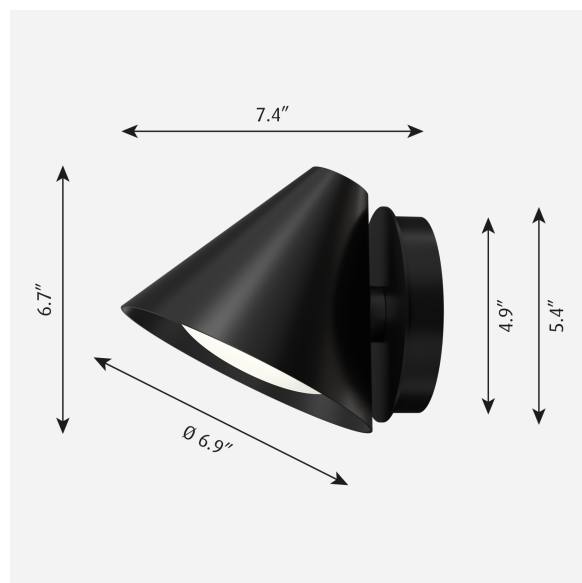

Product family



Keglen




Keglen Table




Keglen Floor

Light distribution diagrams


Cartesian

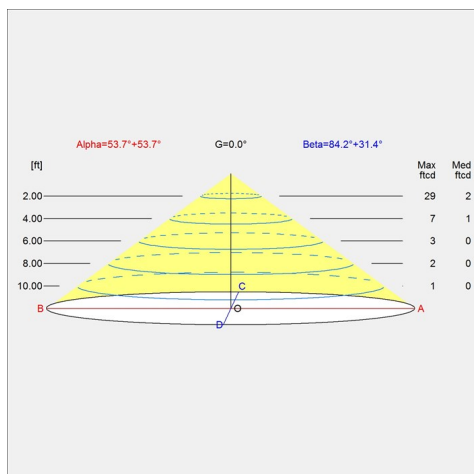

Isolux

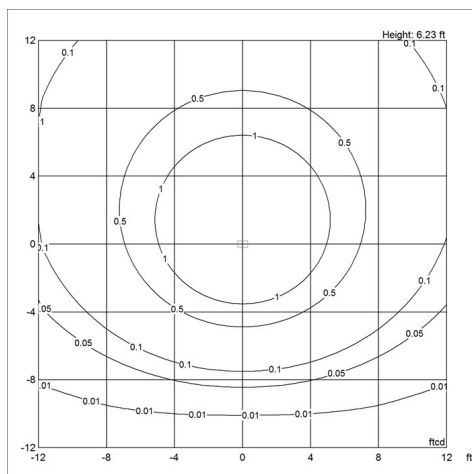

Polar

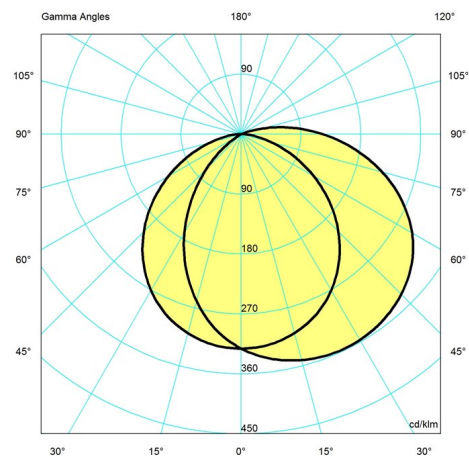

Data specifications

Colour	Black	Length	7.4
Width	6.9	Height	5.6
Built-in Height	-	IP class	20
Class	-	Net Weight	1.8
Standby (W)	-	Power Factor (P = 100 % / P = 50 %)	-
Inrush Current	-	Light source	LED 2700-2000K D2W
Kelvin	2700	CRI	90
SDCM	3	Lumen	338
Watt	8.5	Efficacy	40
Light control	-	Min. Dim Level (%)	-

UGR Transversal / Axial	18.7/5.9
-------------------------	-----------------

L80B50 (hours)	-
----------------	---

Driver life	-
-------------	---
