


# KEGLEN WALL

LED 3000K / White / Wht / - / - / - / 5743916252

The wall lamp's distinctive conical shade has a built-in curved diffuser. This ensures an attractive and glare-free light. A gentle light is also emitted upward through a discreet uniform opening in the top of the shade to create a perfect ambiance. The fixture can be mounted facing downward to direct the light to a specific spot, or upward for indirect light.



**Jakob Lange - BIG Ideas**



## Product info

### Information

Multi-function button switch: tap for switching on/off; press and hold for continuous dimming. May be disabled for on/off operation by remote wall light switch. An integrated memory function ensures that the lamp will return to its last dim level when turned on. Head can rotate +/- 45° sideways. Electrical: System Wattage: 9W LED Wattage: 8W Delivered lumens: 338 - 484 Efficacy: 40 lm/W - 57 lm/W (LED) Certifications: cULus, Dry Location Protection class IP20 Controllability: Continuous dimming by integrated button switch. Color Rendering: Ra $\geq$ 90 Dim-to-warm LED CCT: 2700K at 100%; 2000K at max dim.

### Mounting

Mounted directly to finished surface over a 4" octagonal junction-box. Switch: push button switch on the top wall box. Electronic LED driver is housed inside the wall box.

### Finish

Black or white, matte, wet-painted.

### Materials

Shade: Spun aluminum. Diffusor: Injection molded PC.

### Sizes and weight

Width x Height x Length (in.) | 6.9 x 5.6 x 7.4 Max 1.8 lbs

### Compliance

cULus, Dry location.

### Light source

LED 3000K

Lumen: 484

### Information

Multi-function button switch: tap for switching on/off; press and hold for continuous dimming. May be disabled for on/off operation by remote wall light switch. An integrated memory function ensures that the lamp will return to its last dim level when turned on.

Head can rotate +/- 45° sideways.

Electrical:

System Wattage: 9W

LED Wattage: 8W

Delivered lumens: 338 - 484

Efficacy: 40 lm/W - 57 lm/W (LED)

Certifications:


cULus, Dry Location

Protection class IP20

Controllability: Continuous dimming by integrated button switch.

Color Rendering: Ra $\geq$ 90

Dim-to-warm LED CCT: 2700K at 100%; 2000K at max dim.

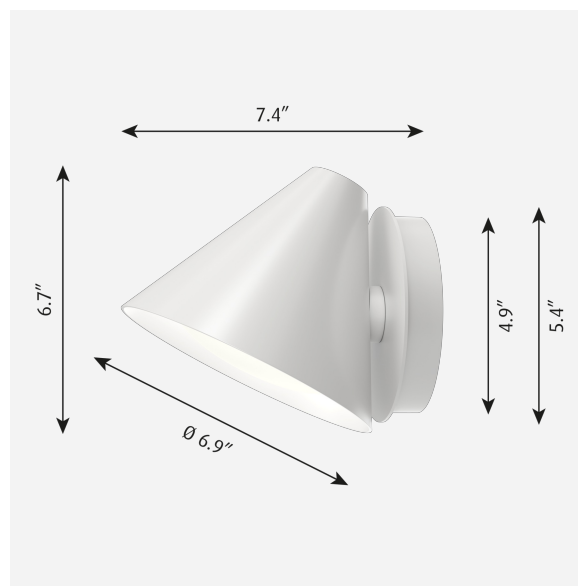

## Product family



Keglen




Keglen Table




Keglen Floor

# Light distribution diagrams


## Cartesian

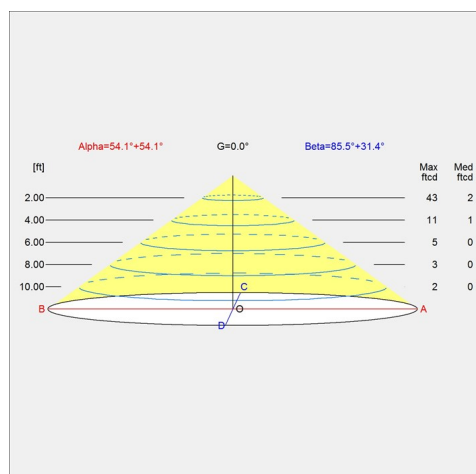

## Isolux

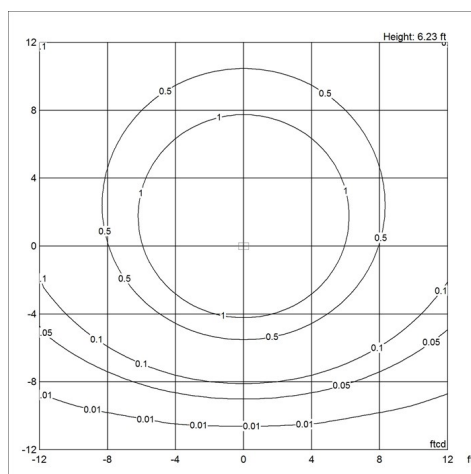

## Polar

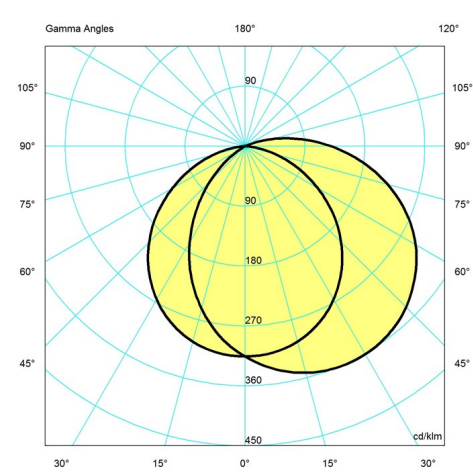

## Data specifications

Colour	<b>White</b>	Length	<b>7.4</b>
Width	<b>6.9</b>	Height	<b>5.6</b>
Built-in Height	-	IP class	<b>20</b>
Class	-	Net Weight	<b>1.5</b>
Standby (W)	-	Power Factor (P = 100 % / P = 50 %)	-
Inrush Current	-	Light source	<b>LED 3000K</b>
Kelvin	<b>3000</b>	CRI	<b>90</b>
SDCM	<b>3</b>	Lumen	<b>484</b>
Watt	<b>8.5</b>	Efficacy	<b>57</b>
Light control	-	Min. Dim Level (%)	-

---

UGR Transversal / Axial	20.0/7.2
-------------------------	----------

---

---

L80B50 (hours)	-
----------------	---

---

---

Driver life	-
-------------	---

---