

# NJP WALL

NJP-W / LED 3000K / 120V / Black / - / Short arm / - / - / 5743163209

The fixture provides direct glare-free horizontal light while reflecting some of the light through the rear of the head, illuminating the top of the arm. The ergonomic design of the fixture head shapes the light and gives optimal light direction. A simple mechanical system provides great freedom of movement, so the light can always be set in the ideal position in the workspace. The shade is painted white on the inside, reflecting comfortable diffused light.



## nendo

In 2002 Oki Sato founded nendo design studio. nendo means 'clay' in Japanese – or more specifically, modelling clay such as plasticine. A unique material that makes it easy to do creative modelling.



## Product info

### Environmental Product Specification

This product is compliant with the requirements contained in the European Directives, RoHS Directive 2011/65 and 2015/863. This product is designed so that 100% of the product can be disassembled and reused.

### Information

Electrical: System Wattage: 10W LED Wattage: 9W Delivered lumens: 550 Efficacy: 55 lm/W Certifications: cULus, Dry Location Protection class IP20 Controllability: Step dimming Color Rendering: Ra≥90

### Mounting

Cord type: White (White finish), black (non-white finish). Cord length: 6'. Switch: High/low/off button on the fixture head. Timer function: 4 hours or 8 hours. LED driver: Separate, plugs into power outlet.

### Finish

White, Black or Light Aluminium Grey, powder coated.

### Materials

Arms and lamp head: Aluminum. Joints: Anodized Aluminum. Wall bracket: Aluminum.

### Sizes and weight

Width x Height x Length (in.) | 5.9 x 23.6 x 23.6 Max 3.4 lbs | 5.9 x 7.9 x 11.8 Max 1.7 lbs

### Compliance

cULus, Dry location.

### Light source

LED 3000K

Lumen: 550

### Information

Electrical:

System Wattage: 10W

LED Wattage: 9W

Delivered lumens: 550

Efficacy: 55 lm/W


Certifications:

cULus, Dry Location

Protection class IP20

Controllability: Step dimming

Color Rendering: Ra≥90

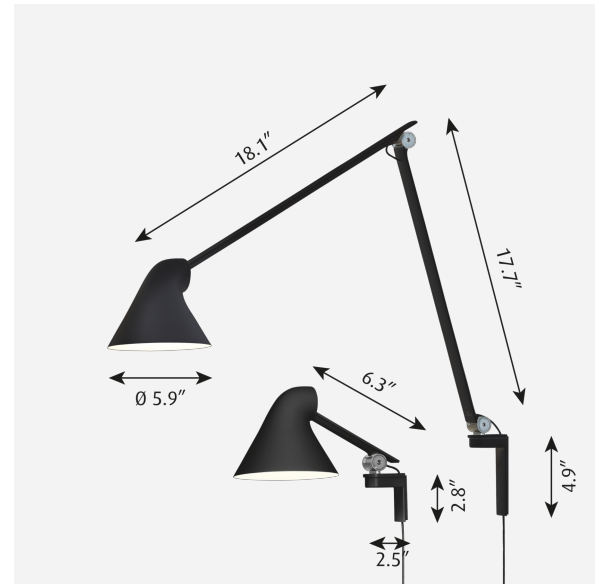

# Product family



NJP Table



NJP Floor



NJP Mini









NJP Wall Box

# Light distribution diagrams

## Cartesian

## Isolux

## Polar

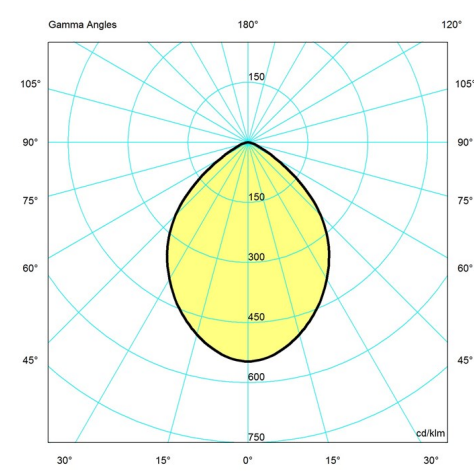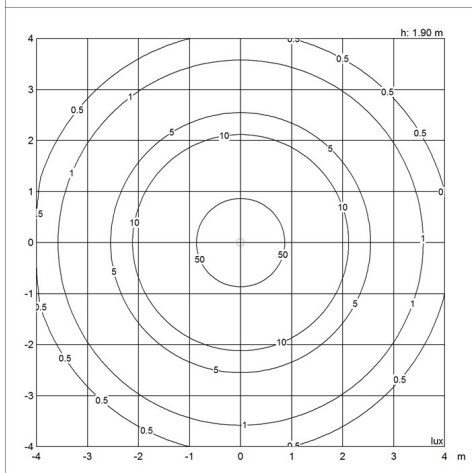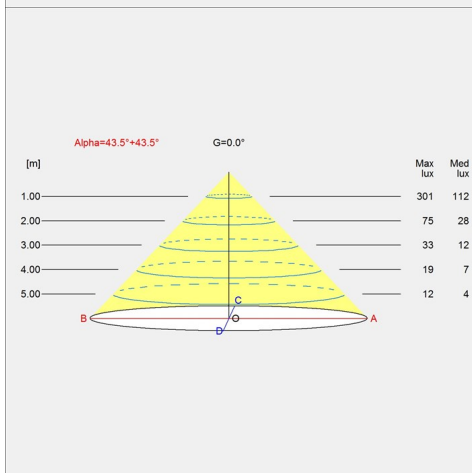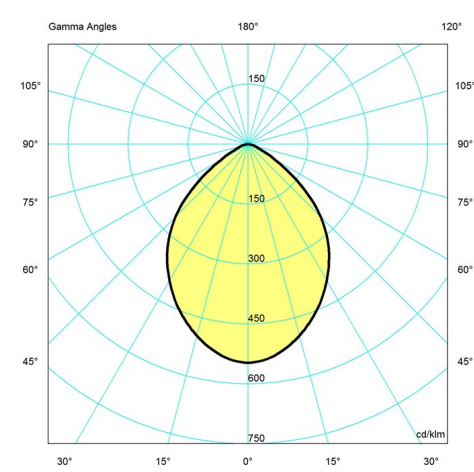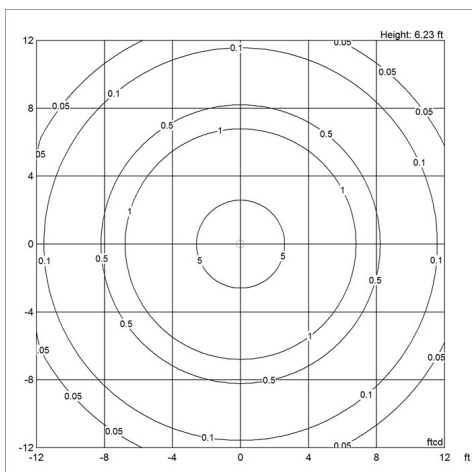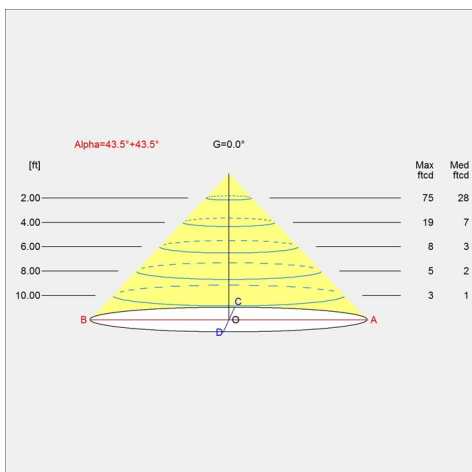

## Spare parts & accessories

Product	Variant number
ADAPTOR 12V BLK	5744164867
ADAPTOR 12V WHT	5744164870
NJP BUSHING PLAST	5744165183
NJP WALL BRACKET LONG BLK	5743163160
NJP WALL BRACKET LONG WHT	5743163173
NJP WALL BRACKET LONG LIGHT GREY	5743163364

## Data specifications

Colour	<b>Black</b>	Length	<b>11.8</b>
Width	<b>5.9</b>	Height	<b>7.9</b>
Built-in Height	-	IP class	<b>20</b>
Class	-	Net Weight	<b>1.7</b>
Standby (W)	-	Power Factor (P = 100 % / P = 50 %)	-
Inrush Current	-	Light source	<b>LED 3000K</b>
Kelvin	<b>3000</b>	CRI	<b>97</b>
SDCM	<b>3</b>	Lumen	<b>550</b>
Watt	<b>10</b>	Efficacy	<b>55</b>
Light control	-	Min. Dim Level (%)	<b>50</b>
UGR Transversal / Axial	<b>19.4/19.4</b>	L80B50 (hours)	-
Driver life	-		