


NYHAVN WALL

NYW / A-19/medium / 120V / White / CLEAR / - / - / - / - / 5743909366

The conical shade ensures comfortable light that is directed downwards in a wide beam. The shade interior has a white matte painted surface, ensuring uniform light distribution. The rings ensure that a stray light is controlled, and direct a small amount of light onto the top side of the shade for self-illumination.



Skagen



Fuchu City Junior High School No. 3

Product info

Environmental Product Specification

This product is compliant with the requirements contained in the European Directives, RoHS Directive 2011/65 and 2015/863. This product is designed so that 100% of the product can be disassembled and reused.

Information

Electrical: System Wattage: 15 W Delivered lumens: 1,239 lm Efficacy: 82.6 lm/W Certifications: cULus, Wet Location Protection class IP44 BUG Rating: B1-U2-G0 Controllability: Phase dimming Min.-Max. Ambient Temp: -20°C to +40°C Actual performance dependent upon screw-base lamp used.

Mounting

Surface: Mounted directly to finished surface over a recessed 4" octagonal junction box.

Finish

Copper, brushed or white, wet painted.

Materials

Shades: Spun aluminum or spun copper. Diffuser: Clear glass. Top: Spun aluminum or spun copper. Mounting box: Die cast aluminum. Mounting box cover: Spun aluminum or spun copper. Arm: Copper plated, red brass or steel.

Sizes and weight

Width x Height x Length (in.) | 12.2 x 8.4 x 18.5 Max 10.3 lbs

Compliance

cULus, Wet location.

Light source

A-19/medium

Information

Electrical:

System Wattage: 15 W

Delivered lumens: 1,239 lm

Efficacy: 82.6 lm/W

Certifications:

cULus, Wet Location


Protection class IP44

BUG Rating: B1-U2-G0


Controllability: Phase dimming

Min.-Max. Ambient Temp: -20°C to +40°C


Actual performance dependent upon screw-base lamp used.

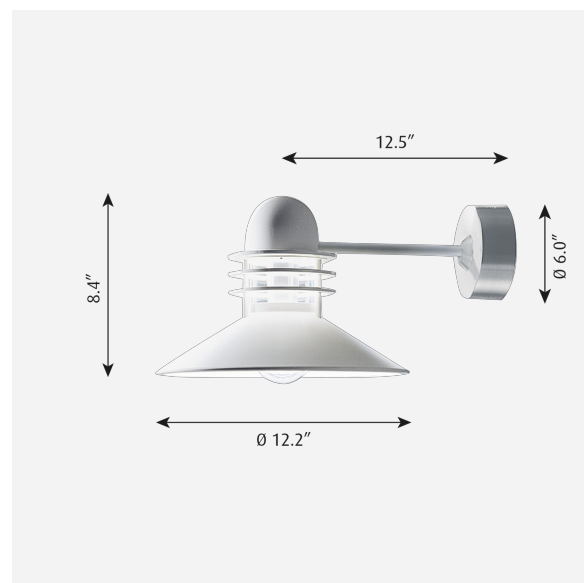





Product family



Nyhavn Park Post



Nyhavn Park Pole

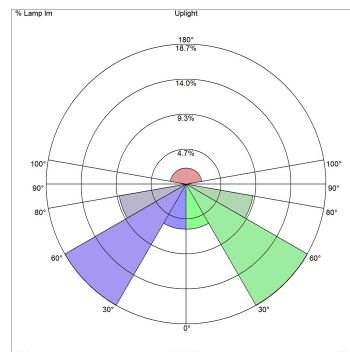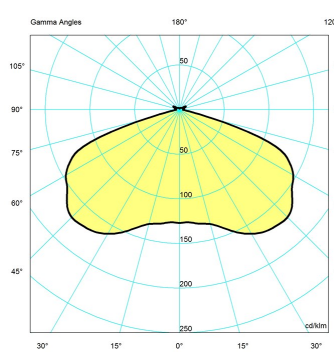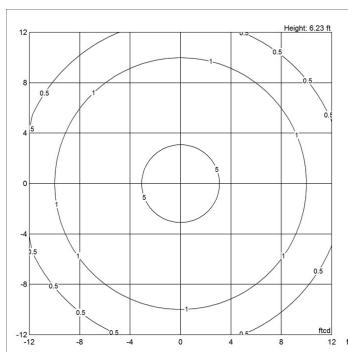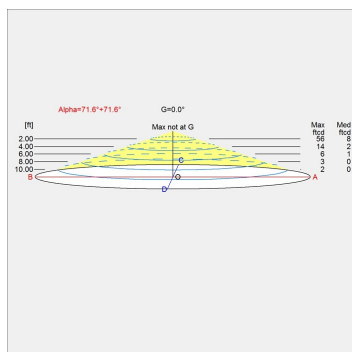

Nyhavn Wall

Light source	A-19/medium
CRI	-
Lumen	-
Efficacy	-
Min. Dim Level (%)	-
BUG Rating	B1 U2 G0
Driver life	-

Kelvin	-
SDCM	-
Watt	-
Light control	-
Surges	-
L80B50 (hours)	-