

# TOLDBOD 6.1/8.7 GLASS PENDANT

TOP / 6.1 IN / G16.5/IF candelabra / 120V / White opal glass / - / - / - / - / 6040000008

The fixture emits glare-free light directed primarily downwards. The opal glass provides a comfortable and uniform illumination of the area around the fixture.



**Jissen 120th  
memorial square  
(Jissen Women's  
University)**



**Greek Restaurant Spyro's**

## Product info

### Environmental Product Specification

This product is compliant with the requirements contained in the European Directives, RoHS Directive 2011/65 and 2015/863. This product is designed so that 100% of the product can be disassembled and reused.

### Information

Electrical: System Wattage: 5W or 22W LED Wattage: 5 W or 20 W Delivered lumens: 189 - 436 Efficacy: 37.8 lm/W - 19.8 lm/W Certifications: cULus, Dry Location Protection class IP20 Controllability: Phase dimming Actual performance dependent upon screw-base lamp used.

### Mounting

Canopy: White. Cord type: 3-conductor, 18 AWG white PVC power cord. Cord length: 12'.

### Finish

White opal glass.

### Materials

Suspension: Brushed stainless steel. Shade: Handblown white opal glass.

### Sizes and weight

Width x Height x Length (in.) | 6.1 x 10.4 x 6.1 Max 1.8 lbs | 8.7 x 15.1 x 8.7 Max 3.4 lbs

### Compliance

cULus, Dry location.

### Specification notes

a. 6.1 IN available only in 1/10W/G16.5. b. 8.7 IN available only in 22W LED/A-21.

### Light source

G16.5/IF candelabra

### Information

#### Electrical:

System Wattage: 5W or 22W

LED Wattage: 5 W or 20 W

Delivered lumens: 189 - 436

Efficacy: 37.8 lm/W - 19.8 lm/W

#### Certifications:

cULus, Dry Location


Protection class IP20

Controllability: Phase dimming


Actual performance dependent upon screw-base lamp used.




## Product family



Toldbod Pendant



Toldbod 6.1 Wall




Toldbod 6.1 Bollard




Toldbod 11.4 Post

# Light distribution diagrams


## Cartesian

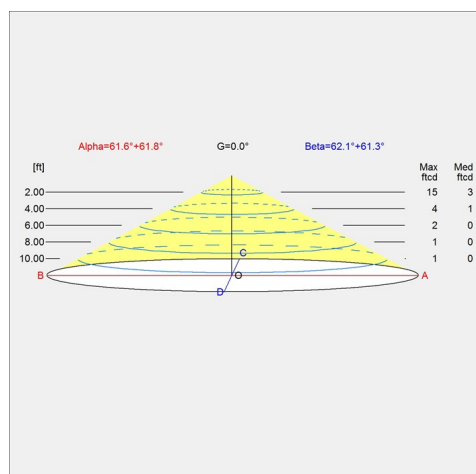

## Isolux

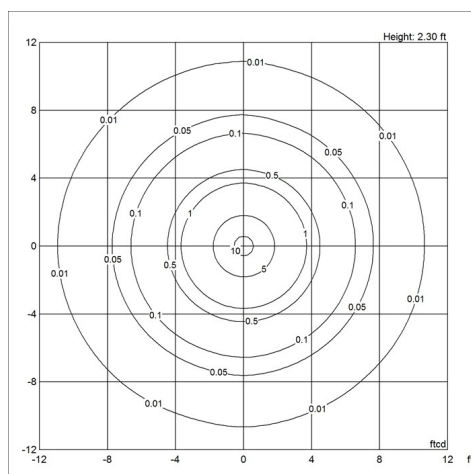

## Polar

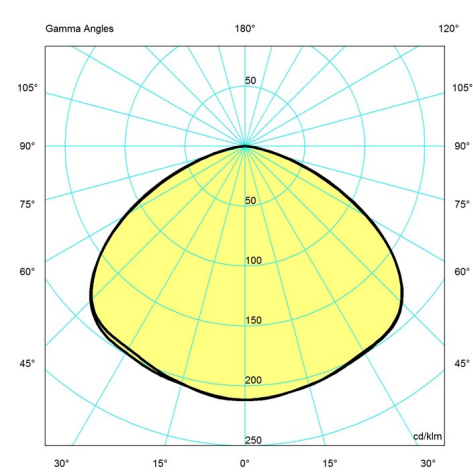

## Spare parts & accessories

### Product

TOLDBOD PENDANT 155, SPARE GLASS  
TOLDBOD PENDANT 220, SPARE GLASS

### Variant number

5741085907  
5741085910

## Data specifications

Colour	White opal glass	Length	6.1
Width	6.1	Height	10.4
Built-in Height	-	IP class	20
Class	II	Net Weight	1.8
Standby (W)	-	Power Factor (P = 100 % / P = 50 %)	-

**Toldbod 6.1/8.7 Glass Pendant**

Inrush Current	-
Kelvin	-
SDCM	-
Watt	-
Light control	-
UGR Transversal / Axial	<b>40.9/40.9</b>
Driver life	-

Light source	<b>G16.5/IF candelabra</b>
CRI	-
Lumen	-
Efficacy	-
Min. Dim Level (%)	-
L80B50 (hours)	-