


TOLDBOD 6.1 BOLLARD

Designed by Louis Poulsen A/S

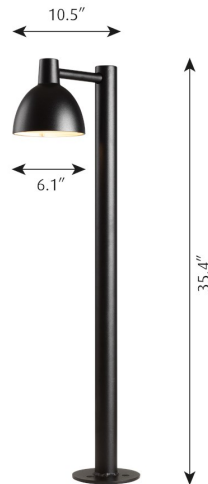

Description

The light is directed 100% downwards and the shade has a matte white painted interior emitting a soft, diffused, comfortable light.

Variants

VARIANT NUMBER	COLOR, RAL	W / H / L (IN) / W (LB)
5747916449	BLK, 723	- / - / - IN / 5.4 LB
5847901402	BLK, 723	6.1 / 35.4 / 10.5 IN / 5.0 LB

Materials & Finishes

MATERIALS

Shield: Tempered sand blasted glass. Luminaire head: Die cast aluminum. Post: Extruded aluminum. Base plate: Aluminum.

FINISHES

Black, powder coated.

Mounting

Base plate dimension: 6" diameter. Base plate: Mounted to a concrete base with 3 anchor bolts on a bolt circle of 3.54" diameter. Installation: Refer to mounting instruction download


for installation details. For mounting instructions, see download section on the product detail page.

Information


Electrical:
 Maximum Lamp Wattage: 60W
 Delivered lumens: 661 lm
 Efficacy: 3.0 lm/W
 Certifications:
 cULus, Wet Location
 Protection class IP44
 IK class 05
 BUG Rating: B0-U1-G0
 Controllability: Phase dimming. For the E-socket product variants, bulbs are not included. LED light source is part of the product.

Light distribution diagrams


CARTESIAN

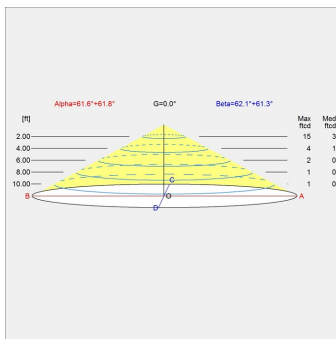


ISOLUX

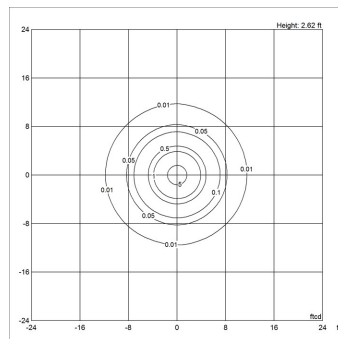

POLAR

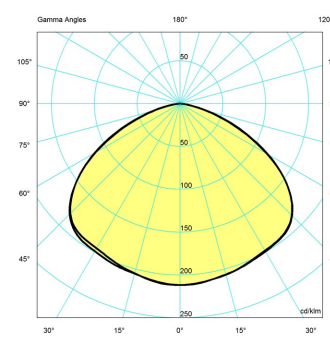

BUG

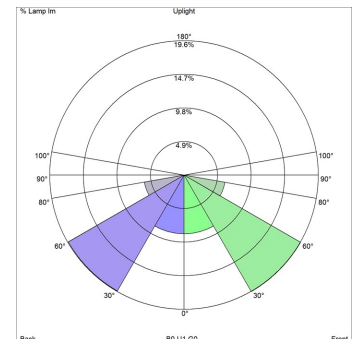

Variant Options

For particular variant options, please check our online Product Variants Configurator on the product detail page.

VARIANT NO.	LIGHT SOURCE	VOLTAGE/FRQ	LUMEN	FEATURES	CABLE
5747916449	G16.5/IF candelabra	120V	-	-	-
5847901402	G16.5/IF candelabra	120V	193	-	-