


VL RING CROWN 3-5-7

Designed by Vilhelm Lauritzen

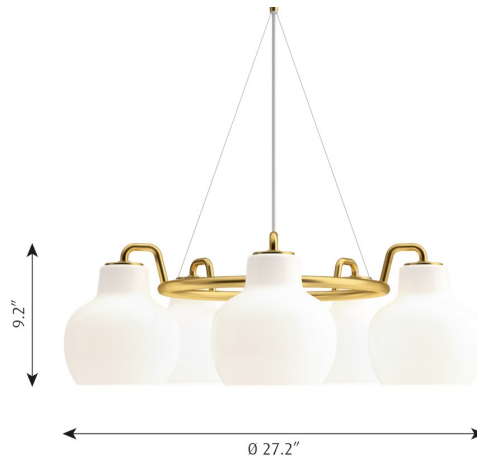

Description

The pendant emits light directed primarily downwards. The opal glass provides a comfortable and uniform illumination of the area around the fixture.

Variants

VARIANT NUMBER	COLOR, RAL	W / H / L (IN) / W (LB)
5741925449	BRASS/GLOSSY OPAL GLASS	21.7 / 9.2 / 21.7 IN / 11.8 LB
5741925465	BRASS/GLOSSY OPAL GLASS	27.2 / 9.2 / 27.2 IN / 16.9 LB
5741925481	BRASS/GLOSSY OPAL GLASS	35.2 / 9.2 / 35.2 IN / 22.1 LB

Materials & Finishes

MATERIALS

Shades: Hand blown, 3-layered, polished opal glass. Wires: Stainless steel. Frame and canopy in untreated brass, will patinate.

FINISHES

Glossy, hand blown white opal glass. Satin polished brass, untreated.

Mounting

Mounting: Suspension type: 3x stainless steel aircraft cables. Suspension length: 12'.

louis poulsen

Canopy: Brass. Cord type: 3-conductors, 18 AWG white braided fabric covered cord. Cord length: 12'. For mounting instructions, see download section on the product detail page.

Information

Electrical:

System Wattage: 45W or 105W

LED Wattage: 41 W or 97 W

Delivered lumens: 1,808 - 6,500

Efficacy: 40.2 lm/W - 61.9 lm/W

Certifications:

cULus, Dry Location


Protection class IP20

Controllability: Phase dimming


Actual performance dependent upon screw-base lamp used. For the E-socket product variants, bulbs are not included. LED light source is part of the product.

Light distribution diagrams


CARTESIAN

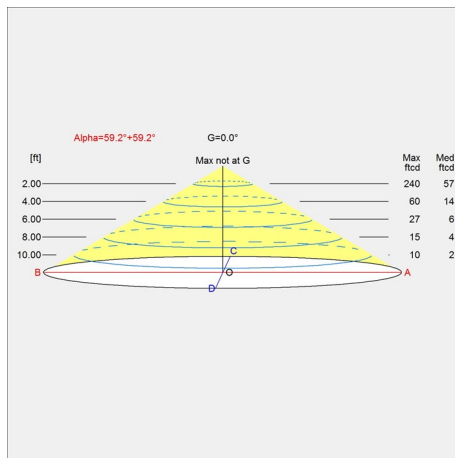

ISOLUX

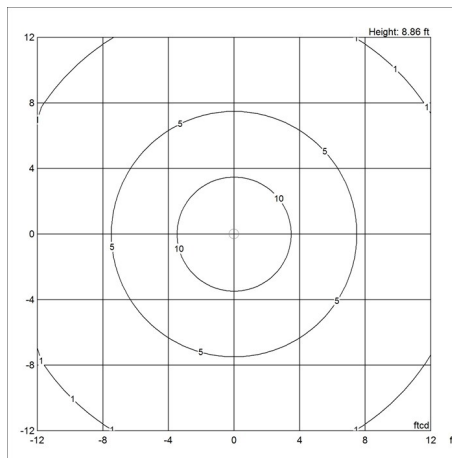

POLAR

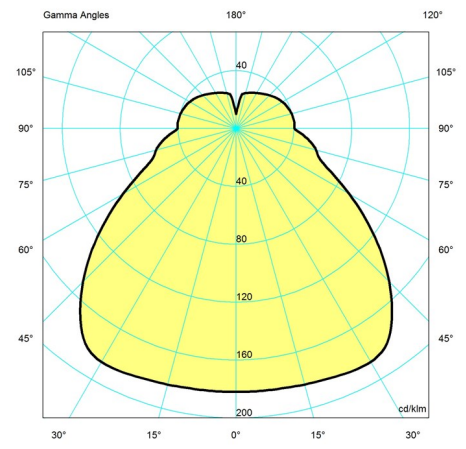

Variant Options

For particular variant options, please check our online Product Variants Configurator on the product detail page.

VARIANT NO.	LIGHT SOURCE	VOLTAGE/FRQ	LUMEN	FEATURES	CABLE
5741925449	A-19/ medium US	120V	2807	-	White textile
5741925465	A-19/medium	120V		-	White textile
5741925481	A-19/medium	120V	6551	-	White textile