

# INSTALLATION INSTRUCTION FOR FIXTURE #N7985-420

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**  
**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

Page:1/2

## ASSEMBLY THE FIXTURE (FIG. 1 & FIG.3)

1. Shut of power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. Determine desired height and thread rods (G1 and G2) together. Thread loop (I1) to rod (G1). Pass wires carefully through each rod as you assemble.
4. Attach quick link (H) to loop (I2) on canopy (D). Carefully feed wire through loop (I1), quick link (H) and loop (I2). Assemble bottom end of rod into coupling (J).
5. Attach circular strap (B) to junction box using junction box screws (C). The side of circular strap (B) marked "GND" must face out. Mounting screw can be adjustable if necessary.
6. The support cable is provided to support weight of fixture while wiring. Align fixture to circular strap (B) and attach hook on end of support cable (E) into a slot located on circular strap (B). Carefully allow support cable (E) to support the weight of fixture while wiring.

## CONNECTING THE WIRES (FIG. 2)

7. Connect the electrical wires as shown in Fig. 2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to circular strap (B) using green screw provided.
8. Tuck wire connectors neatly inside the junction box.

## COMPLETING THE INSTALLATION (Fig. 1)

9. Raise the fixture over mounting screws (A) and secure with decorative knobs (F).
10. Place candle covers (K) over the sockets (L).
11. Install (6) six candelabra base bulbs (M) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification—**DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**.

Your installation is now complete. Turn on the power supply of the junction box to test the fixture.

**Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.**

Fig.1


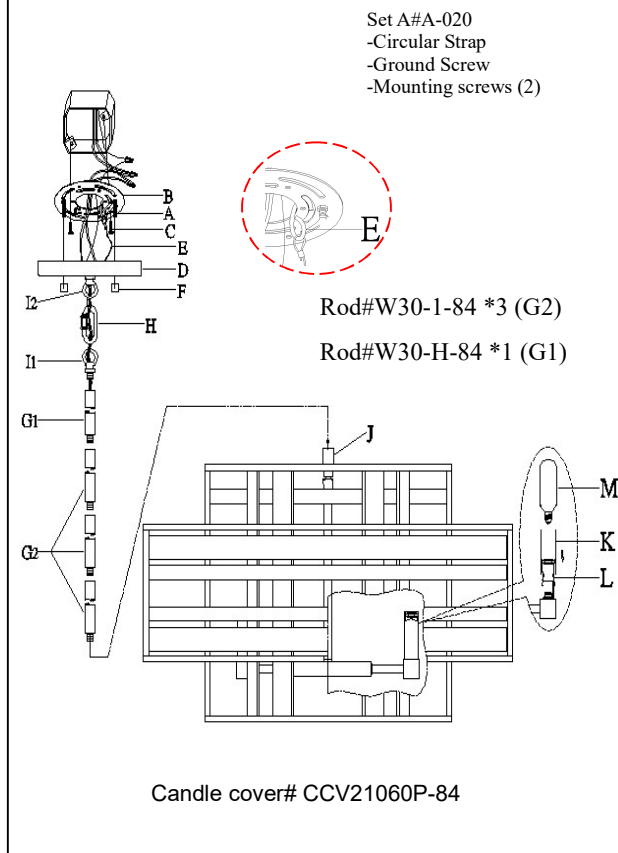



Fig.2

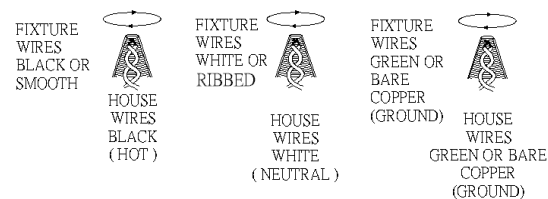

american  
lighting


# #7985-420

Fig

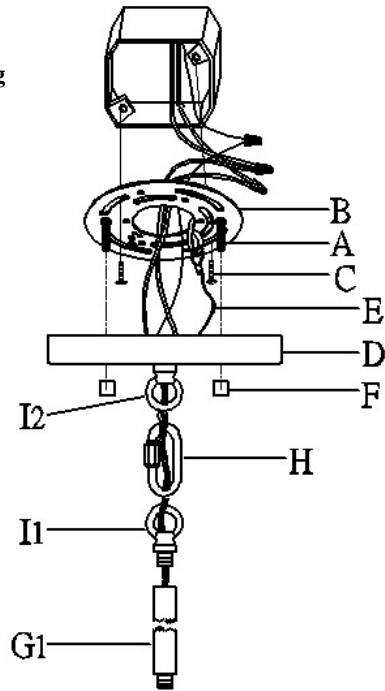

a. Hardware Bag:

- A. Mounting Screw with Nut\*2
- B. Circular Strap\*1
- C. Screw\*2
- D. Canopy\*1
- H. Quick Link\*1
- I. Loop\*1

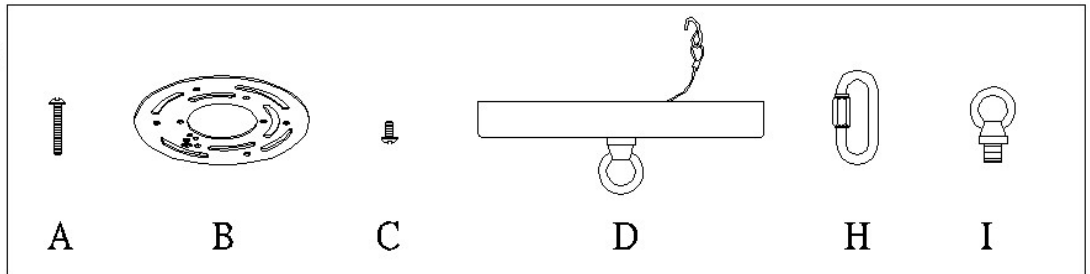

b. Hardware Bag:

- G1. ROD 6\*\*1
- G2. ROD 12\*\*3

