

# INSTALLATION INSTRUCTIONS

For item#3046-560(New. 01/29/2021)

## READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

### PREPARING FOR INSTALLATION (Fig. 1)

1. Shut of power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. Thread all thread (E) into crossbar (C) until snug. Note: The length of all thread (E) into the crossbar (C) may be adjusted if necessary.
4. Use the lock washer (B) and hex nut (A) to secure the all thread (E) into the crossbar (C).
5. Take this crossbar (C) assembly and mount it to ceiling outlet box with mounting screws (D) (Size: #8-32N\*L0.5"). The side of crossbar marked with "GND" must face out.
6. Determine the desired hanging height and thread rods (F1, F2 and F3) to all thread (I) on the fixture body. Screw loop (H1) to rod (F1). Pass the wires carefully through each rod as you assemble.
7. Attach the quick link (G) to loop (H1) and loop (H2) on the canopy (D). Carefully feed the wire through loop (H1), quick link (G), and loop (H2).

### CONNECTING THE WIRES (Fig.2)

8. Connect the electrical wires as shown in figure 2, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the crossbar (C) using the green screw provided.
9. Tuck wire connectors neatly into the ceiling outlet box and raise the canopy to the ceiling.
10. Slide canopy (F) over all thread (E) and secure with knurled cap (S).
11. Install (6) six medium base bulbs (L) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification—**DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**.
12. Place glass shade (M) onto the socket cup (K).

Your installation is now complete. Return power to the outlet box and test the fixture.

**Note:** Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig. 1

Set# A-010  
- Crossbar  
- Ground screw  
- Mounting screw\*2

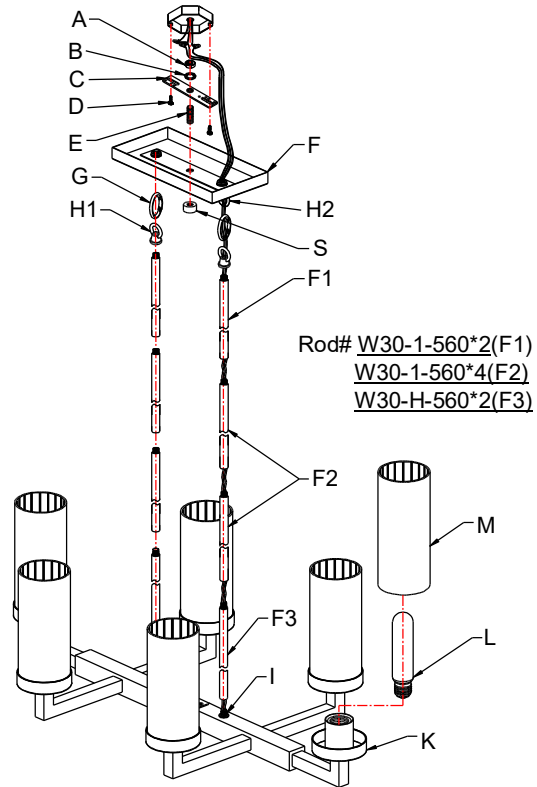


Fig. 2

