

INSTALLATION INSTRUCTIONS

For Item#5137-699 (New. 2022/07/18)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARATION (Fig. 1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.

ASSEMBLING AND HANGING THE FIXTURE (Fig.1)

3. Secure rod (F) onto all thread (G) on fixture body. Carefully pass wires through rod (F) as you assemble.
4. Open one end of chain (L) and attach it to fixture loop (M2), then close the chain.
5. By measuring, determine the correct number of links needed for the desired hanging height. Using the chain pliers, disconnect and discard the excess chain (L).
6. Carefully lace fixture wires through chain (L).
7. Open the other end of the chain (L) and attach it to loop (M1). Then close the chain (L).
8. Carefully feed fixture wires through loop (M1) and canopy (D) and pull tight.
9. Thread screws (A) into pre-drilled holes in circular strap (B). Spaced the same distance apart as the holes in the canopy (D). The length of screws (A) may be adjusted if necessary.
10. Attach circular strap (B) to the junction box (not included) using mounting screws (C) (Size: #8-32N*L0.5"). The side of the circular strap marked "GND" must face out.

CONNECTING THE WIRES (Fig. 2)

11. Connect the electrical wires as shown in fig 2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the circular strap (B) using the green screw provided.
12. Tuck wire connectors neatly into junction box..

COMPLETING THE INSTALLATION (Fig. 1)


13. Slide screws (A) through canopy (D) and secure with knobs (E).
14. Install (4) four medium base bulbs (J) up to 100 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification—**DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
15. Place the glass shade (K) inside the cup (H) and secure with screws (I). Do not over tighten.

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.


Fig. 1

Set#A-020-A
- Circular Strap
-Ground screw
-Mounting screw*2

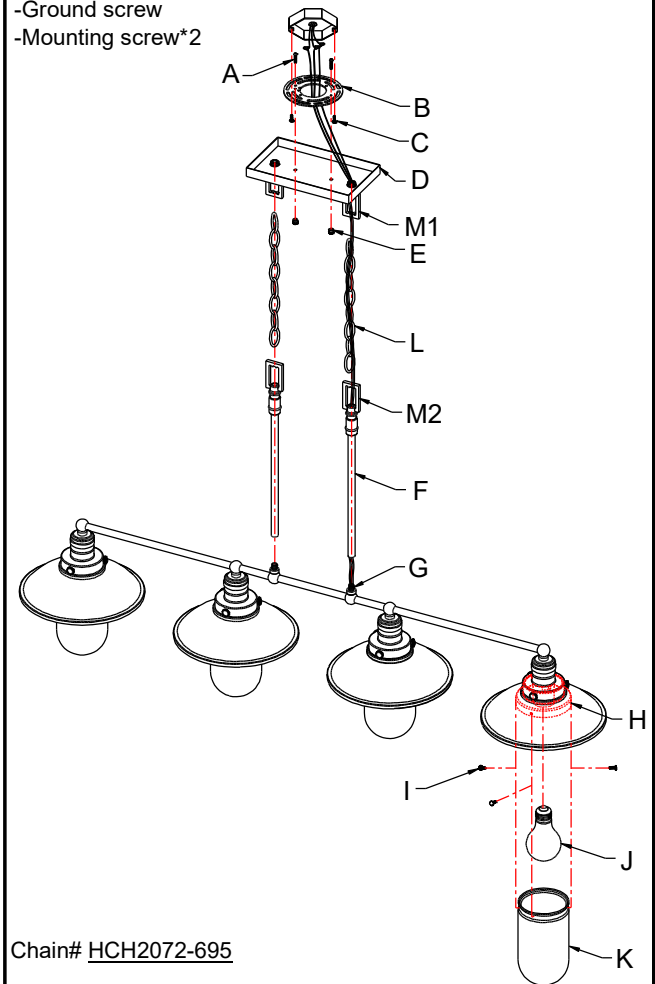

Chain# HCH2072-695

Fig. 2

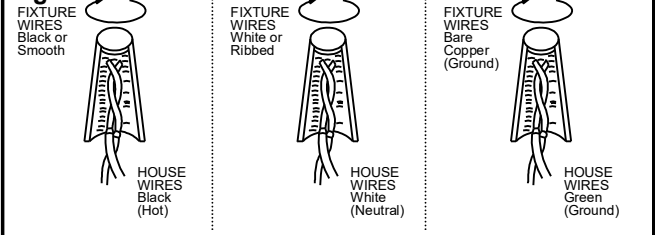

Notice: It is important to use proper chain pliers (not included) To OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.