

INSTALLATION INSTRUCTIONS FOR FIXTURE

Item#4645-579 (New. 2021/02/01)

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

ASSEMBLING THE FIXTURE (FIG. 1)

1. Shut of power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. Determine the desired hanging height and thread tubes (I & J) to connectors (K) on top of the fixture body. Pass the wires carefully through each tube as you assemble.
4. Insert rubber washers (H) into the all threads of tubes (I) and attach loops (F).
5. Attached quick links (G) to loops (F) on bottom of canopy (D) and the top of tubes (I).

MOUNTING THE FIXTURE (Fig. 1)

6. Screw all thread (C) into crossbar (A) and secure with spring washer and hex nut.
7. Attach crossbar (A) to the outlet box using the outlet box screws (B). The side of the crossbar (A) marked "GND" must face out.
8. Connect the electrical wires as shown in Fig. 2, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the ground wire from the fixture to it. Otherwise, connect the fixture's ground wire directly to the crossbar (A) using the ground green screw provided.
9. After wires are connected, tuck them carefully into the outlet box.
10. Raise canopy (D) to the outlet box and secure with finials (E).
11. Install (5) five candelabra base bulbs (M) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification. — **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!**
12. Insert glass shades (L) into cups (P).

Your installation is now complete. Return power to the outlet box and test the fixture.

Fig.1


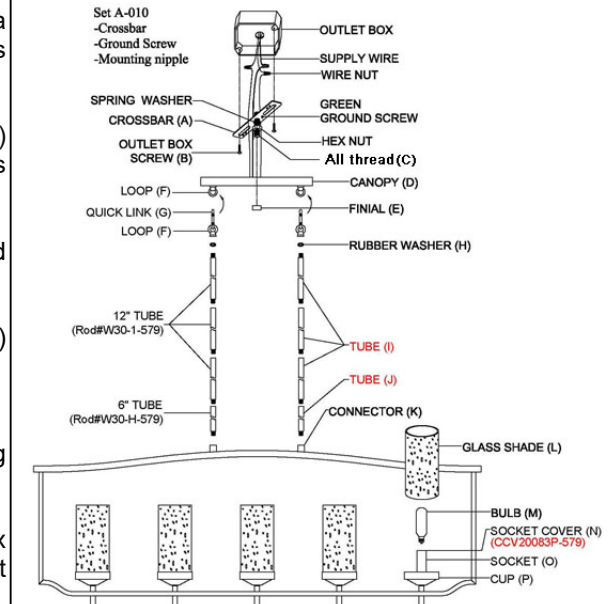


Fig.2

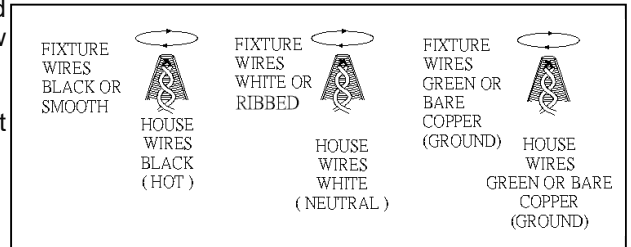

LA-3308E