

INSTALLATION INSTRUCTIONS For Fixture #4960

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

MOUNTING THE FIXTURE (Fig. 1)

1. Shut off the power supply at the fuse box or circuit breaker. If necessary, remove the old fixture from ceiling, including the mounting hardware.
2. Carefully remove the new fixture from the packaging and check that all parts are included as shown in the illustration.
3. Thread the 2 mounting screw (F) about 1/4" into the pre-drilled holes in the Crossbar (G) spaced the same distance apart as the holes in the fixture.
4. Attached the Cross bar (G) to the outlet box using the 2 Outlet Box Screws (E). The side of the Cross bar (G) marked "GND" must face out.
5. Hold the steel pan (I) towards the Crossbar (G) and connect the electrical wires as follows (See Fig. 2), making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the cross bar using the green screw provided.
6. Tuck the wire connections neatly into the ceiling junction box as you are holding the fixture assembly toward the ceiling.
7. Finish mounting the fixture pans (I) by placing it over both mounting screws (F) so that the screws protrude through the key holes in the steel pan (I). Rotate the pan (I) until the screws are seated in the slots of the key holes. Then tighten the screws with a screwdriver.
8. Thread the Nipple (M) into the Coupling (J). The lower nipple length could be adjusted and secured by adjusting the location of the hex nut on the Nipple (M) to install the lower parts of the fixture.
9. Install the light bulbs in accordance with the fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).**
10. Place the glass shade (L), plastic washer (H), steel washer (N) over the center nipple (M) in that order, then secure with hex nut (O).
11. Place the bottom cap (P) on to the center nipple (M) and thread the finial (Q) onto nipple (M) until snug.

Your installation is now complete. Return power to the outlet box and test the fixture.

Fig.1


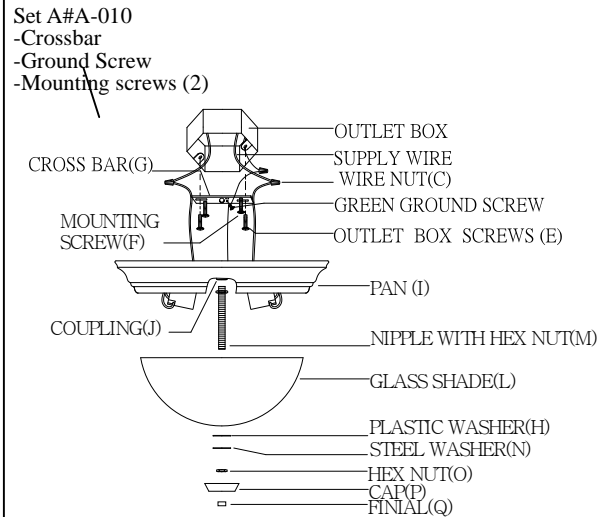


Fig .2



american
lighting
association

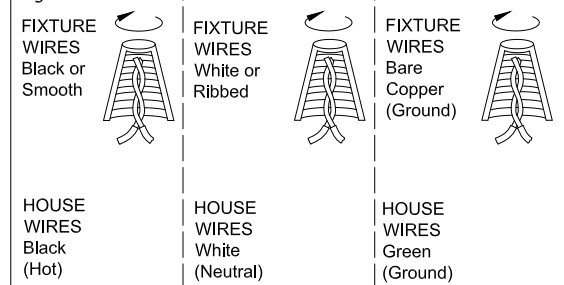