

# INSTALLATION INSTRUCTIONS

Item#1336-923 (New. 2023/02/03)

## READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

### ASSEMBLING THE FIXTURE (Fig. 1)

1. Shut of power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. Screw decorative assembly (G) to all thread (H) on top of fixture body.
4. Determine the desired hanging height and thread rods (F1, F2 and F3) to the all thread on top of decorative assembly (G). Screw canopy (D) to rod (F1). Carefully pass the wires through each rod during assembly.
5. Thread screws (A) into the pre-drilled holes in circular strap (B) spaced the same distance apart as the holes in the canopy (D). The length of screws (A) may be adjusted if necessary.
6. Attach circular strap (B) to the junction box (not included) with mounting screws (C) (Size: #8-32N\*L0.5"). The side of the circular strap (B) with "GND" marked on it and two convex points must face out.

### CONNECTING THE WIRES (Fig. 2)

7. Connect the electrical wires as shown in fig 2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the circular strap (B) using the green screw provided.
8. Tuck the wire connectors neatly into the junction box.

### COMPLETING THE INSTALLATION (Fig. 1)

9. Slide canopy (D) over screws (A) and secure with knurled knobs (E).
10. Screw all thread (L) to fixture body, then slide plastic washer (M), metal tube (N), glass ball (O), plastic washer (M) over all thread (L) and secure with finial (P).
11. Install (6) six candelabra base bulbs (J) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification — **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
12. Place glass shades (I) over sockets and twist to secure to socket cup (K).

**The net weight of this fixture is over 4.5kgs, please ensure to remove all the crystals before inspect branch circuit connections, this will help you to conveniently hold the fixture body.**

Your installation is now complete. Return power to the junction box and test the fixture.

**Note: Illustration (Fig. 1) on this manual is for**

Fig. 1

Set# A-020

- Circular Strap
- Ground Screw
- Mounting Screw\*2

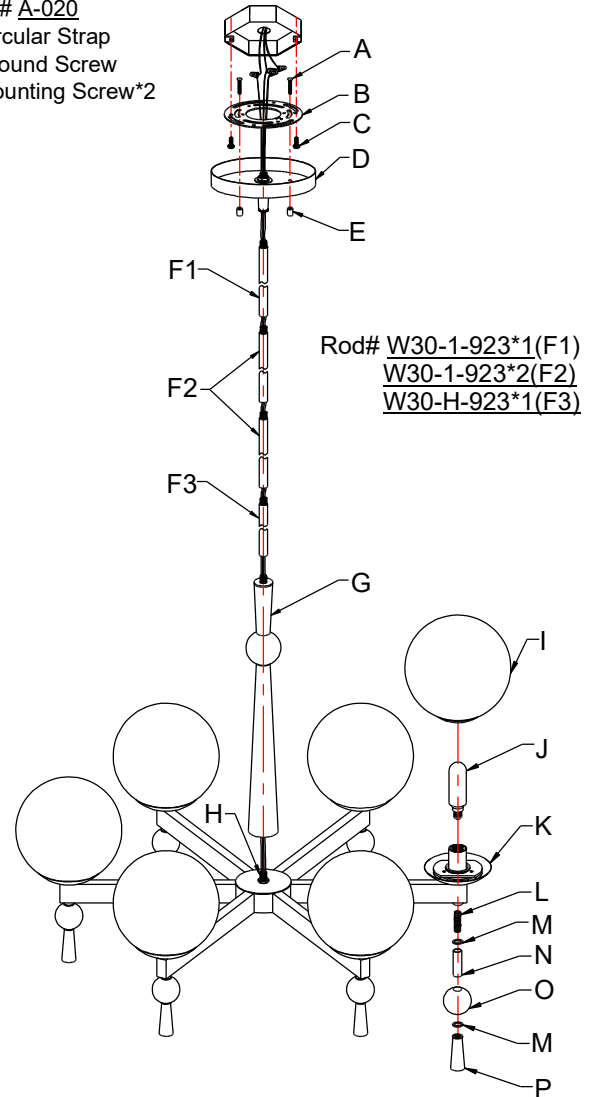


Fig. 2

