


INSTALLATION INSTRUCTION FOR FIXTURE #3078-416

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**


MOUNTING THE FIXTURE (FIG. 1)

1. Shut off the power supply at the fuse box or circuit breaker. If necessary, remove the old fixture from wall. Including the mounting hardware.
2. Carefully remove the new fixture from the carton and check that all parts are included as shown in the illustration.
3. Attach the mounting plate (M) to the outlet box using the outlet box screws (K). The side of the mounting plate marked "GND" must face out.
4. Follow the wiring instructions carefully (See Fig.2).
5. Attach the fixture body (N) over the cross bar (M) by protruding the mounting screws (L) through the mounting holes on the fixture body (N) and securing with ball nut (I) tightly.
6. Install the bulb (not included) in accordance with fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).**
7. Thread the stem(G) into coupling(H). After that, install the steel panel(D), rubber panel(E), glass panel(F), rubber panel(E), steel panel(D). hex nut(C) and cover(B) accordingly, and then secure with finial(A) tightly.
8. If you want to change the fabric shade(O), you need to remove the screws(P) and take off the shade(O); then install a new one by securing with the screws(P) as shown in the Fig.1..

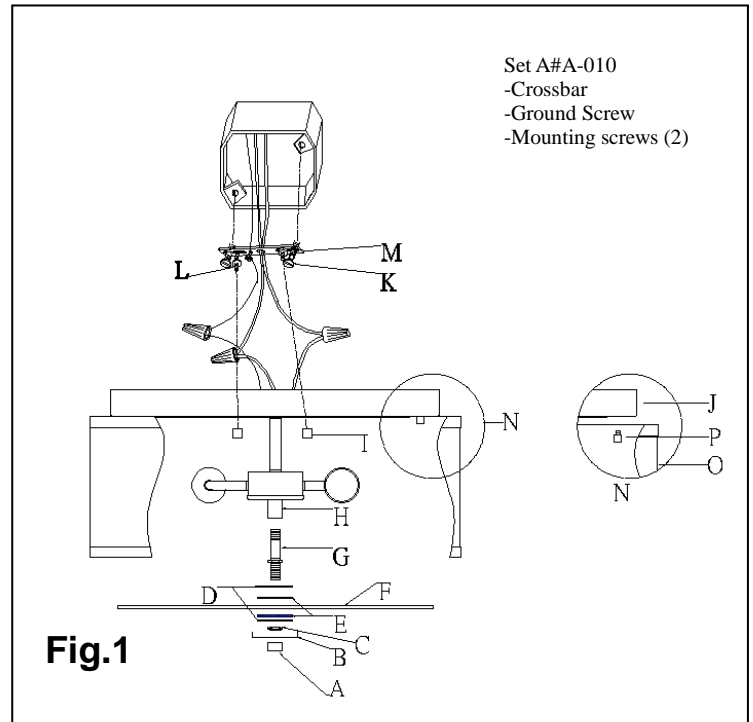

CONNECTING THE WIRES (FIG. 2)

1. At this point, connect the electrical wires as shown in Fig. 2, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting strap using the green screw provided.
2. Tuck the wire connections neatly into the wall outlet box.

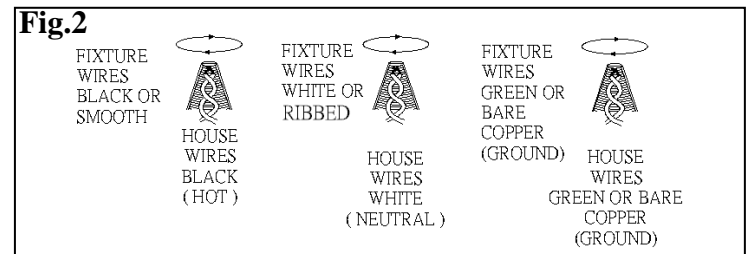

Your installation is now complete. Return power to the junction box and test the fixture.