

INSTALLATION INSTRUCTIONS

Item#4407-581

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

HANGING THE FIXTURE (Fig. 1)

1. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
2. Shut off power at the circuit breaker and remove old fixture including the mounting hardware.
3. The Crossbar (B) contains several pairs of threaded holes, find the pair of holes that match the holes spacing in your Junction box Attach the Fixture Crossbar (B) to the Junction Box using the two Mounting screws (C size: 8/32*25mm). Tighten the screws (C) securely with screwdriver.
4. Thread one end of the Nipple (S) attached into ceiling loop(D),the other end attached into Crossbar (B) and Tighten the Washer and Hex Nut until tightening to the Crossbar (B)
5. Attached below fixture body(R) to top fixture body(I) by thread Fixture body(R) to the bottom of the Tube(K).
6. Place the Fixture body(I) onto the Metal frame(M) and tighten the fixture(I) to the tube(K)and secure them together by Screw(L).
7. Screw the loop(G) on to the nipple(H) tighten.After complete to this step ,please keep you fixture wire smooth.
8. Use one chain connector(E) to attach one end of the chain to the Top loop (G) and close the chain connector.
9. At this step,you may determine how long of the chain you would like to use.By measuring determine correct number of links needed for proper hanging height. Use a pair of pliers to open one link of the Chain (F) then remove the excess Chain (F) and discard it.
10. Slip Canopy loop collar (U) and canopy(T) over the chain. Use the other chain connector(E) and attach the other end of the chain to the ceiling loop (D) and close the chain connector.
11. Thread the fixture wires and ground wire of the assembled fixture through the chain(F) , canopy loop collar (U), canopy loop(D), canopy(T) and nipple(S) and into the outlet box.This step please refer below Fig. 2 wire connecting..
- 12.Raise Canopy (T) over the nipple(S) to the ceiling and secure in place by tightening the Canopy loop collar (U) onto the Canopy Loop (D)..
- 13.Hanging the crystal(P) and crystal(Q) under the socket and arm.

CONNECTING THE WIRES (Fig. 2)

- 14.At this point, connect the electrical wire as shown in (Fig.2), making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixtures Ground Wire to it. Otherwise, connect the fixture Ground Wire directly to the circular strap using the Green Screw provided.


FINISH THE INSTALLATION (Fig. 1)

- 15..Install light bulb (not included) in accordance with the fixture's specifications. (DO NOT EXCEED THE MAXIMUM WATTAGE RATING!!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig. 1

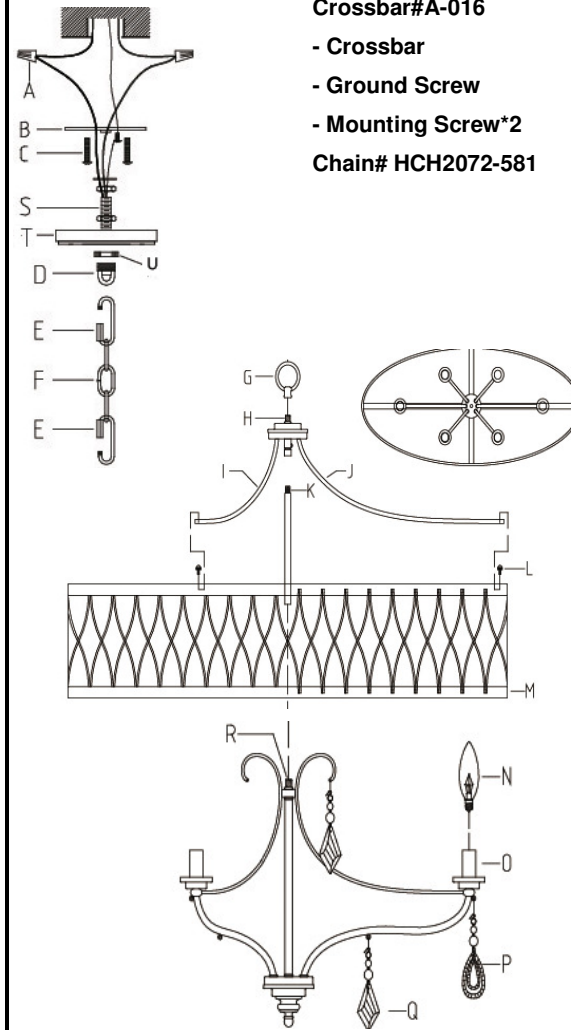

Crossbar#A-016


- Crossbar

- Ground Screw

- Mounting Screw*2

Chain# HCH2072-581

Fig. 2

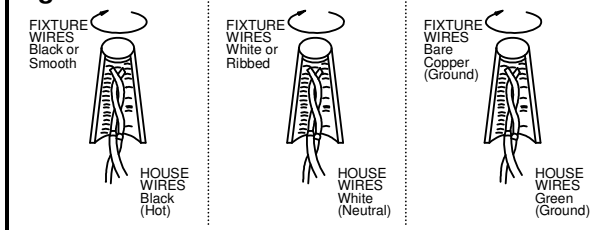

Notice: It is important to use proper chain pliers (not included)

To OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.



UL LISTED

american lighting association