




Pensi DC



Pensi DC > Configure item number from attributes below.

#PEN	Finish	Blade Span	Blade Color	Light Option	Control Option
-	-	-	-	-	-
▲	▲	▲	▲	▲	▲
	GW Gloss White	52 52" Span	WH White	NL No Light	WC Wall Control
	AA Aluminum/Anthracite		AL Aluminum	151 7W GU10 LED	RC Remote Control
					CC Wall/Remote Combo

Dimensions

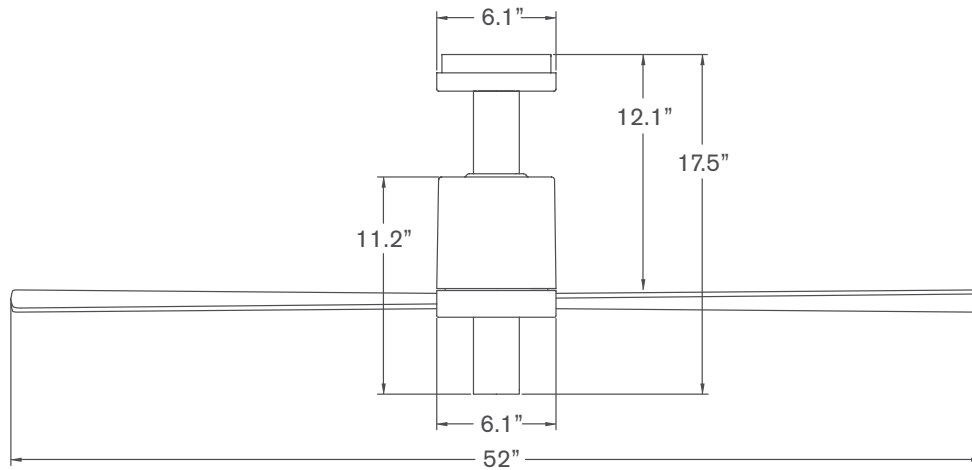

Specifications

- 6-speed, reversible DC motor
- Die cast and extruded aluminum construction
- 52" span, injection-molded ABS blades
- Pre-configured with a 4" down rod (longer options also available)
- Optional LED light: 7W, 90 CRI, 3000K, 500 lumens (dimnable), GU10 base; CA Title 24, JA8-2019 compliant
- For flat ceilings only
- Designed by Jorge Pensi
- ETL listed for dry and damp locations
- Weight: 16.0 lbs (7.3 kgs)

Performance Data

LOWEST SPEED

RPM: 45
CFM: 1,445
Watts: 2.35
CFM/W: 615

HIGHEST SPEED

RPM: 170
CFM: 7,020
Watts: 26.56
CFM/W: 264

Energy Guide Data

Average Energy Use
19 Watts

Average Airflow
4,407 CFM

Yearly Energy Cost
\$5

Average Efficiency
235 CFM/Watt

Energy Guide Data represents weighted averages of low speed and high speed performance, assuming typical use (excluding light). For more information, visit www.modernfan.com.

Pensi DC

Gloss White with White Blades (no light)



Gloss White with White Blades and 151 LED Light




Aluminum/Anthracite with Aluminum Blades and 151 LED Light



FAN FINISHES


Gloss White Aluminum Anthracite

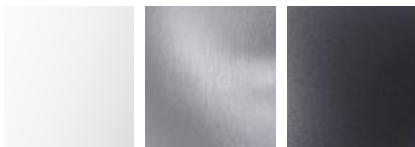

INJECTION MOLDED BLADES

Injection molded blades are constructed of ABS plastic and painted with solid colors as shown here.

White Aluminum



PENSI DC CONTROLS

Pensi DC controls use RF transmission to a receiving unit included with each fan, providing six speeds, reversing and light function (on/off or dimming). Control selection is made at time of order and incorporated into fan item number. Controls utilize dedicated (unique) RF channels to avoid interference with other ceiling fans installed nearby. The wall control (if ordered) also includes a master power switch.

Wall Control (WC)



Remote Control (RC)



Wall/Remote Combo (CC)



* The Pensi DC must use one of the above control options. Third party fan controls are not compatible with this product. The Remote Control (RC) can be used in combination with a standard power switch (on-off) in wall box.

** Wall control unit is designed for operation of a single fan/fan light only. For multiple units on a single switch leg, the remote control option can be used if the fans are within suitable range. Contact Modern Fan customer support with questions or for additional guidance.

*** To replace lost or damaged control components or to add secondary control to existing control sets (e.g. to add a handset to an existing wall control system), contact Modern Fan Co. customer support for ordering guidance.

DOWN RODS

The Pensi DC ships standard with a 4" down rod. Use the following part numbers to order accessory down rods.

Finish	Length
#DRP -	-
▲	▲
GW Gloss White	11 11" for 24" OAL
AA Anthracite	23 23" for 36" OAL
	35 35" for 48" OAL

Note: The Pensi DC fan is suitable for installation on flat ceilings only.