




Project: \_\_\_\_\_

Location: \_\_\_\_\_

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

**AVAILABLE FINISHES:**



# Minx

PD-78014L

**PRODUCT DESCRIPTION**

Artisanally sparkling pendants are installed in various arrangements to create an artful statement as well as deliver ample lighting to spaces throughout a home or business.

**FEATURES**


- Driver concealed within the canopy
- Artisanal reclaimed K5 crystal shade
- Thin powered aircraft cables provide an ultra clean look for adjustable suspension height
- NEC CODE (314.24) requires that ceiling outlet boxes in the U.S. support up to 50 lbs.
- This fixture in the 14 and 23 light format exceeds 50 lbs. and must be installed using a U.L. listed outlet box approved for up to 75 lbs. and 100 lbs. or supported independently of the outlet box

**SPECIFICATIONS**

Rated Life	55000 Hours
Standards	ETL, cETL,Damp Location Listed
Input	120-277V,50/60Hz
Dimming	ELV, 0-10V, TRIAC
Color Temp	3000K
CRI	90
Construction	Steel body with K5 crystal fused acrylic

**REPLACEMENT PARTS**

RPL-GLA-78013 - Inner glass

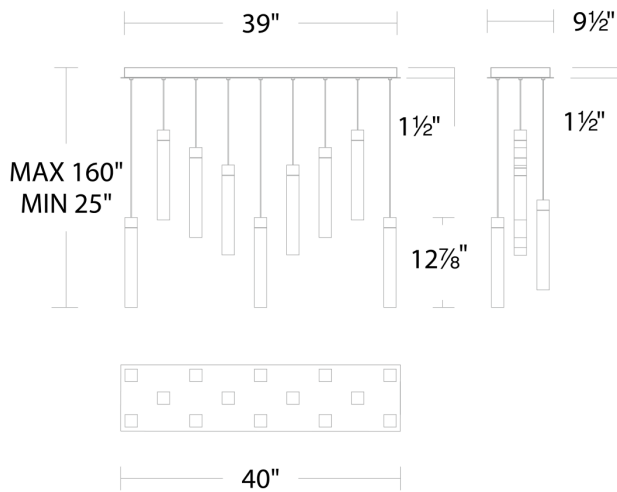

PD-78014L

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-78014L 40" - 14 Lights	3000K 90 3000K 90	67W 67W	3387 3387	AB Aged Brass AN Antique Nickel

Example: **PD-78014L-AN**

For custom requests please contact [customs@modernforms.com](mailto:customs@modernforms.com)




Project: \_\_\_\_\_

Location: \_\_\_\_\_

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

**AVAILABLE FINISHES:**



# Minx

PD-78023L

**PRODUCT DESCRIPTION**

Artisanally sparkling pendants are installed in various arrangements to create an artful statement as well as deliver ample lighting to spaces throughout a home or business.

**FEATURES**


- Driver concealed within the canopy
- Artisanal reclaimed K5 crystal shade
- Thin powered aircraft cables provide an ultra clean look for adjustable suspension height
- NEC CODE (314.24) requires that ceiling outlet boxes in the U.S. support up to 50 lbs.
- This fixture in the 14 and 23 light format exceeds 50 lbs. and must be installed using a U.L. listed outlet box approved for up to 75 lbs. and 100 lbs. or supported independently of the outlet box

**SPECIFICATIONS**

Rated Life	55000 Hours
Standards	ETL, cETL,Damp Location Listed
Input	120-277V,50/60Hz
Dimming	ELV, 0-10V, TRIAC
Color Temp	3000K
CRI	90
Construction	Steel body with K5 crystal fused acrylic

**REPLACEMENT PARTS**

RPL-GLA-78013 - Inner glass

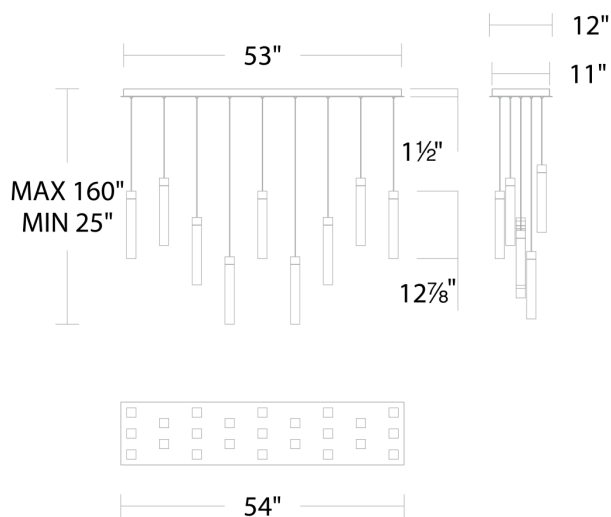

PD-78023L

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-78023L 54" - 23 Lights	3000K 90 3000K 90	110W 110W	5565 5565	AB Aged Brass AN Antique Nickel

Example: **PD-78023L-AN**

For custom requests please contact [customs@modernforms.com](mailto:customs@modernforms.com)