


# SKYLARK

## FR-W2202-62L

62" Ceiling Fan

# MODERN FORMS SMART FANS

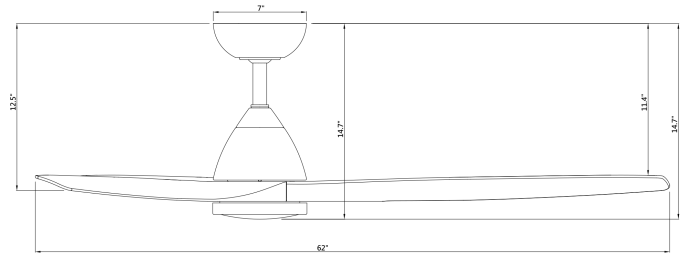

### PRODUCT DESCRIPTION

Introduce sleek sophistication to your home with the Skylark Smart Fan. Spectacular new finishes of soft brass and brushed nickel are unveiled in our Modern Forms Smart Fan collection. The three smartly designed blades circulate air with an agile yet robust gracefulness, bringing incomparable comfort and illumination with an integrated LED luminaire, throughout your space. The convenient, 6-speed set-up can be controlled locally using the included Bluetooth remote control or remotely using the Modern Forms app.

### FEATURES

- 6 fan speeds through both Summer and Winter Modes
- Silent DC motor
- LED luminaire included
- Includes remote control
- Optional wall control sold separately
- Compatible with Modern Forms app

### AIRFLOW/ENERGY EFFICIENCY

|  |           |
|--|-----------|
| <b>Weighted-Average/High Airflow CFM:</b>        | 4524/6920 |
| <b>Weighted-Average/High Energy Use (W):</b>     | 20/28     |
| <b>Estimated Yearly Energy Cost (\$):</b>        | 6         |
| <b>Weighted-Average/High Efficiency (CFM/W):</b> | 227       |
| <b>Max RPM:</b>                                  | 148       |

### ORDER NUMBER

| Model        | Housing                         | Blade                        |
|--------------|---------------------------------|------------------------------|
| FR-W2202-62L | <b>BN</b> <i>Brushed Nickel</i> | <b>EB</b> <i>Ebony</i>       |
|              | <b>MB</b> <i>Matte Black</i>    | <b>MB</b> <i>Matte Black</i> |
|              | <b>SB</b> <i>Soft Brass</i>     | <b>MB</b> <i>Matte Black</i> |
|              | <b>SB</b> <i>Soft Brass</i>     | <b>MW</b> <i>Matte White</i> |

Example: **FR-W2202-62L-MB**

For 2700K add "-27" ; for 3500K add "-35" before the finish: **FR-W2202-62L-27-MB**

**\*Results may vary based on application and surroundings.**

**\*This fan comes uni-pack - blade select options are not available.**

**\*Brushed Nickel and Soft Brass are not intended for coastal environments.**

### SPECIFICATIONS

|                        |  |
|------------------------|--|
| <b>Construction:</b>   | Aluminum, Steel, ABS   |
| <b>Blade:</b>          | 14° Pitch, 62" sweep   |
| <b>Downrod:</b>        | .75W x 4.5H included   |
| <b>Mounting Slope:</b> | Up to 30°  |
| <b>Wire:</b>           | 80"  |
| <b>Hanging Weight:</b> | 17 lbs.  |
| <b>Total Power:</b>    | 48W  |
| <b>Standards:</b>      | UL/cUL Wet Location listed, Title 24 JA8-2016 Compliant, Title 20, Energy Star |
| <b>Motor Type:</b>     | 120 x D-25 sensorless DC motor   |

### WIRELESS PERFORMANCE

|                         |               |
|-------------------------|---------------|
| <b>Wi-Fi Range:</b>     | Up to 150 ft* |
| <b>Bluetooth Range:</b> | Up to 150 ft* |

### LUMINAIRE PERFORMANCE

|                                  |                                       |
|----------------------------------|---------------------------------------|
| <b>Light Source:</b>             | LED                                   |
| <b>Light Wattage:</b>            | 19.5W                                 |
| <b>Lumens/ Delivered Lumens:</b> | 1600/1079                             |
| <b>Dimming:</b>                  | Integrated                            |
| <b>CRI:</b>                      | 90                                    |
| <b>Color Temperature:</b>        | 3000K (2700K/3500K options available) |
| <b>Rated Life:</b>               | 50,000 hours                          |

The Modern Forms app synchronizes seamlessly with smart home devices you already own



modernforms.com  
Phone (800) 526.2588  
Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive  
Port Washington, NY 11050

Central Distribution Center  
1600 Distribution Ct  
Lithia Springs, GA 30122

Western Distribution Center  
1750 Archibald Avenue  
Ontario, CA 91760






# SKYLARK

**FR-W2202-62L**

62" Ceiling Fan

# MODERN FORMS SMART FANS

## OPTIONAL ACCESSORIES

|                          |   |   |                 |  |
|--------------------------|---|---|-----------------|--|
| Bluetooth Wall Control   |    | <b>F-WCBT</b>   | <b>WT</b> White | Control fan speed and light brightness, and switch between Summer and Winter Modes. Additional Wall Controls can be purchased separately for multiple location control.          |
| Bluetooth Remote Control |    | <b>F-RCBT</b>   | <b>WT</b> White | Control fan speed and light brightness, and switch between Summer and Winter Modes. Compatible with Modern Forms Smart Fans. Includes easy-to-install wall cradle and batteries. |
| Downrod                  |    | <b>XF-12</b> 12IN<br><b>XF-18</b> 18IN<br><b>XF-24</b> 24IN<br><b>XF-36</b> 36IN<br><b>XF-48</b> 48IN<br><b>XF-60</b> 60IN<br><b>XF-72</b> 72IN |                 | All our downrods are .75 (in) I.D. and are threaded on the motor end to create an extra layer of security and allow for adjustments in the field.                                |
| Downrod Couplers         |  | <b>XF-I</b>   |                 | Connects two downrods together.  |
| Sloped Ceiling Kit       |  | <b>XF-SCK</b>   |                 | Designed to accommodate buildings with steeper sloped ceilings up to 45° or 12/12 pitch.   |

Examples: Wall Control: **F-WCBT-WT**, Remote Control: **F-RCBT-WT**, Downrod: **XF-12-BN**, Downrod Coupler: **XF-I-MB**, Sloped Ceiling Kit: **XF-SCK-MB**

## SUGGESTED DOWNROD HEIGHT USAGE

| Ceiling Height | 15' | 14' | 13' | 12' | 11' | 10' | 9'  |
|----------------|-----|-----|-----|-----|-----|-----|-----|
| Downrod        | 72" | 60" | 48" | 36" | 24" | 18" | 12" |

## SLOPED CEILING DEGREE CONVERSION CHART

| Degree        | 4-8°  | 9-13° | 14-17° | 18-21° | 22-25° | 26-29° | 30-32° | 33-35° | 36-38° | 39-41° | 42-44° | 45°   |
|---------------|-------|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|-------|
| Ceiling Slope | 1/12  | 2/12  | 3/12   | 4/12   | 5/12   | 6/12   | 7/12   | 8/12   | 9/12   | 10/12  | 11/12  | 12/12 |
| Pitch         | pitch | pitch | pitch  | pitch  | pitch  | pitch  | pitch  | pitch  | pitch  | pitch  | pitch  | pitch |

Supplied mounting brackets allow mounting on ceiling slopes up to 30° (7/12 pitch). Optional slope kit allows mounting on ceilings up to 45° (12/12 pitch). The receiver will mount inside canopy up to 45°.

**NOTE:** Recommended maximum downrod length of 72" with 80" lead wire