

# ZIRKOL – L

ZIRKOL – L is a family of linear suspension lamps suitable for general and decorative lighting.

Anodized aluminium body and opal screen to a homogeneous lighting.

Light emission can be direct light and double light emission with high flux and different colour temperatures. Driver and dimmer interface included.



# LINEAR 39.4" | DOWNLIGHT - 2700K

## LAMPING

Source	Linear LED
Total power	14.5W
Emission	Diffused orientable
Switching	0-10V
Tension	110/240V
Color temperature	2700K
Luminous flux	833lm
Typ CRI	90
IP class	IP40
Dimensions	39.4"x1.9"
Materials	Aluminum
Notes	Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 electrical cable length 16.4'   2 x adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black   RAL 9016 white   shipped assembled



## Codes

UZRL1610G15DBO  
UZRL1610G15DNE  
UZRL1610G15DOR

## Structure

matt white  
matt black  
matt gold

## Certificazioni

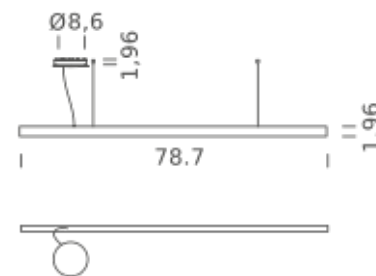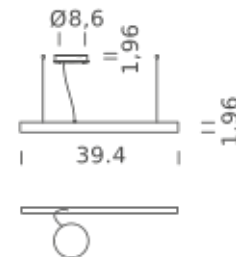

# LINEAR 39.4" | DOWNLIGHT - 3000K

## LAMPING

Source	Linear LED
Total power	14.5W
Emission	Diffused orientable
Switching	0-10V
Tension	110/240V
Color temperature	3000K
Luminous flux	882lm
Typ CRI	90
IP class	IP40
Dimensions	39.4"x1.9"
Materials	Aluminum
Notes	Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 electrical cable length 16.4'   2 x adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black   RAL 9016 white   shipped assembled


## Codes

UZRL1610G15WBO  
UZRL1610G15WNE  
UZRL1610G15WOR

## Structure

matt white  
matt black  
matt gold

## Certificazioni

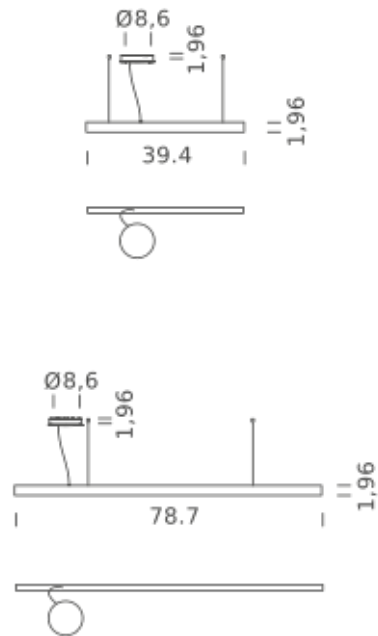

# LINEAR 39.4" | DOWNLIGHT - 4000K

## LAMPING

Source	Linear LED
Total power	14.5W
Emission	Diffused orientable
Switching	0-10V
Tension	110/240V
Color temperature	4000K
Luminous flux	980lm
Typ CRI	90
IP class	IP40
Dimensions	39.4"x1.9"
Materials	Aluminum
Notes	Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 electrical cable length 16.4'   2 x adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black   RAL 9016 white   shipped assembled



## Codes

UZRL1610G15NBO  
UZRL1610G15NNE  
UZRL1610G15NOR

## Structure

matt white  
matt black  
matt gold

## Certificazioni

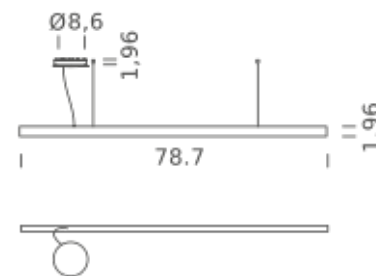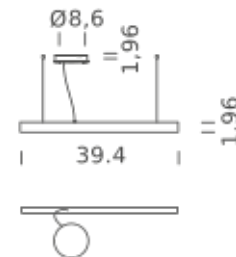

# LINEAR 39.4" | UP-DOWNLIGHT - 2700K

## LAMPING

Source	Linear LED
Total power	29W
Emission	Diffused orientable
Switching	0-10V
Tension	110/240V
Color temperature	2700K
Luminous flux	1666lm
Typ CRI	90
IP class	IP40
Dimensions	39.4"x1.9"
Materials	Aluminum
Notes	Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 electrical cable length 16.4'   2 adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black   RAL 9016 white   shipped assembled



## Codes

UZRL1710G15DBO  
UZRL1710G15DNE  
UZRL1710G15DOR

## Structure

matt white  
matt black  
matt gold

## Certificazioni

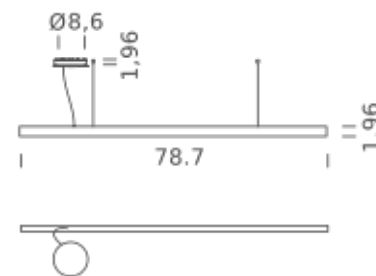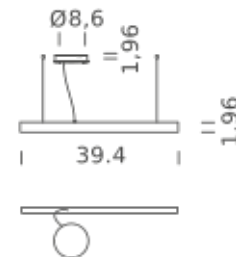

# LINEAR 39.4" | UP-DOWNLIGHT - 3000K

## LAMPING

Source	Linear LED
Total power	29W
Emission	Diffused orientable
Switching	0-10V
Tension	29W
Color temperature	3000K
Luminous flux	1764lm
Typ CRI	90
IP class	IP40
Dimensions	39.4"x1.9"
Materials	Aluminum
Notes	Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 electrical cable length 16.4'   2 adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black   RAL 9016 white   shipped assembled



## Codes

UZRL1710G15WBO  
UZRL1710G15WNE  
UZRL1710G15WOR

## Structure

matt white  
matt black  
matt gold

## Certificazioni

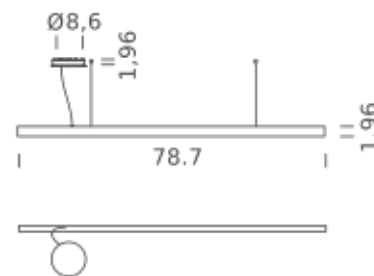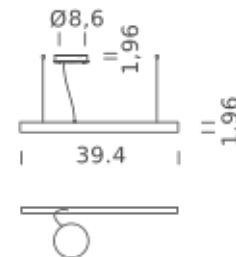

# LINEAR 39.4" | UP-DOWNLIGHT - 4000K

## LAMPING

Source	Linear LED
Total power	29W
Emission	Diffused orientable
Switching	0-10V
Tension	110/240V
Color temperature	4000K
Luminous flux	1960lm
Typ CRI	90
IP class	IP40
Dimensions	39.4"x1.9"
Materials	Aluminum
Notes	Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 electrical cable length 16.4'   2 adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black   RAL 9016 white   shipped assembled


## Codes

UZRL1710G15NBO  
UZRL1710G15NNE  
UZRL1710G15NOR

## Structure

matt white  
matt black  
matt gold

## Certificazioni

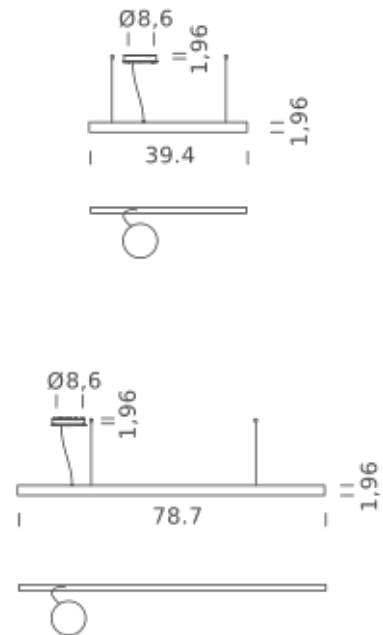

# LINEAR 78.7" | DOWNLIGHT - 2700K

## LAMPING

Source	Linear LED
Total power	29W
Emission	Diffused orientable
Switching	0-10V
Tension	110/240V
Color temperature	2700K
Luminous flux	1666lm
Typ CRI	90
IP class	IP40
Dimensions	78.7"x1.9"
Materials	Aluminum
Notes	Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 electrical cable length 16.4'   2 adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black   RAL 9016 white   shipped assembled


## Codes

UZRL1620G15DBO  
UZRL1620G15DNE  
UZRL1620G15DOR

## Structure

matt white  
matt black  
matt gold

## Certificazioni

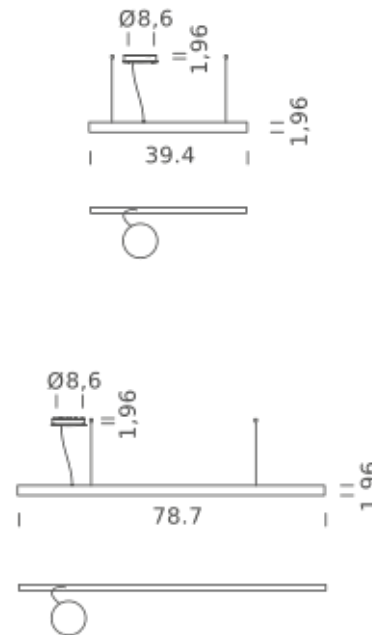



# LINEAR 78.7" | DOWNLIGHT - 3000K

## LAMPING

Source	Linear LED
Total power	29W
Emission	Diffused orientable
Switching	0-10V
Tension	110/240V
Color temperature	3000K
Luminous flux	1764lm
Typ CRI	90
IP class	IP40
Dimensions	78.7"x1.9"
Materials	Aluminum
Notes	Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 electrical cable length 16.4'   2 adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black   RAL 9016 white   shipped assembled



## Codes

UZRL1620G15WBO  
UZRL1620G15WNE  
UZRL1620G15WOR

## Structure

matt white  
matt black  
matt gold

## Certificazioni

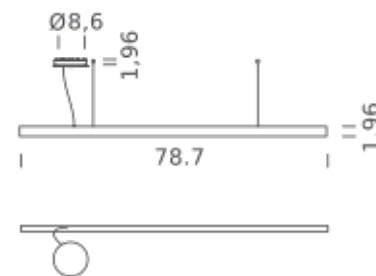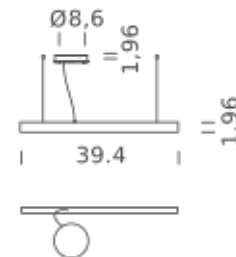

# LINEAR 78.7" | DOWNLIGHT - 4000K

## LAMPING

Source	Linear LED
Total power	29W
Emission	Diffused orientable
Switching	0-10V
Tension	110/240V
Color temperature	4000K
Luminous flux	1960lm
Typ CRI	90
IP class	IP40
Dimensions	78.7"x1.9"
Materials	Aluminum
Notes	Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 electrical cable length 16.4'   2 adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black   RAL 9016 white   shipped assembled


## Codes

UZRL1620G15NBO  
UZRL1620G15NNE  
UZRL1620G15NOR

## Structure

matt white  
matt black  
matt gold

## Certificazioni

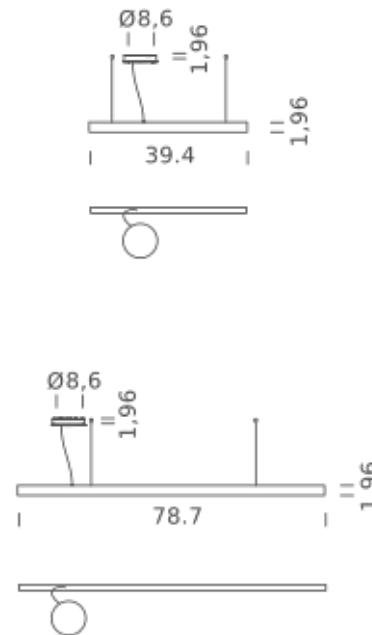

# LINEAR 78.7" | UP-DOWNLIGHT - 2700K

## LAMPING

Source	Linear LED
Total power	58W
Emission	Diffused orientable
Switching	0-10V
Tension	110/240V
Color temperature	2700K
Luminous flux	3332lm
Typ CRI	90
IP class	IP40
Dimensions	78.7"x1.9"
Materials	Aluminum
Notes	Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 electrical cable length 16.4'   2 adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black   RAL 9016 white   shipped assembled


## Codes

UZRL1720G15DBO  
UZRL1720G15DNE  
UZRL1720G15DOR

## Structure

matt white  
matt black  
matt gold

## Certificazioni

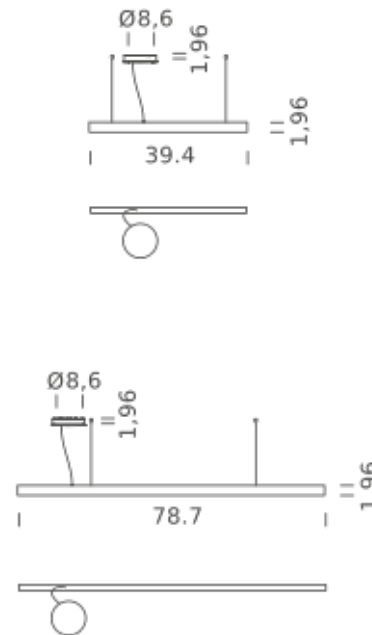

# LINEAR 78.7" | UP-DOWNLIGHT - 3000K

## LAMPING

Source	Linear LED
Total power	58W
Emission	Diffused orientable
Switching	0-10V
Tension	110/240V
Color temperature	3000K
Luminous flux	3528lm
Typ CRI	90
IP class	IP40
Dimensions	78.7"x1.9"
Materials	Aluminum
Notes	Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 electrical cable length 16.4'   2 adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black   RAL 9016 white   shipped assembled


## Codes

UZRL1720G15WBO  
UZRL1720G15WNE  
UZRL1720G15WOR

## Structure

matt white  
matt black  
matt gold

## Certificazioni

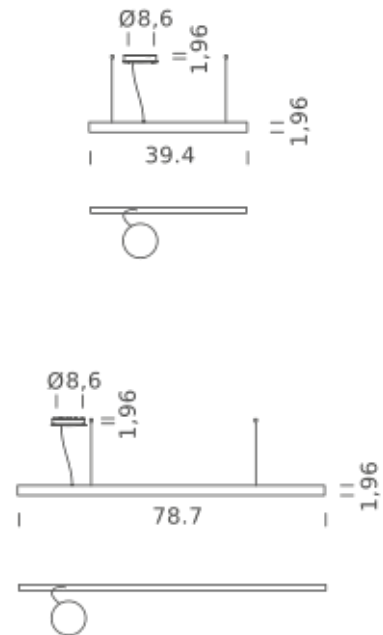

# LINEAR 78.7" | UP-DOWNLIGHT - 4000K

## LAMPING

Source	Linear LED
Total power	58W
Emission	Diffused orientable
Switching	0-10V
Tension	110/240V
Color temperature	4000K
Luminous flux	3920lm
Typ CRI	90
IP class	IP40
Dimensions	78.7"x1.9"
Materials	Aluminum
Notes	Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 electrical cable length 16.4'   2 adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black   RAL 9016 white   shipped assembled

## Codes

UZRL1720G15NBO  
UZRL1720G15NNE  
UZRL1720G15NOR

## Structure

matt white  
matt black  
matt gold

## Certificazioni

