

LUNA Pendant
3-671-xx

oxygen

FIXTURE TYPE _____

LOCATION _____

PROJECT _____

DATE _____




-20 Polished Nickel

-22 Oiled Bronze

-24 Satin Nickel

-40 Aged Brass

- LIGHT SOURCE** 1 x 6.1W LED, 3000K, CRI 90
- LUMINAIRE POWER** 7.2W at 120V
- RATED LIFE** 60000 hr RL
- OPTIONAL COLOR TEMPERATURES** 2700K, 3500K, 4000K
- LUMEN OUTPUT** Delivered: 368 lm (LM-79)
- INPUT VOLTAGE** 120V to 277V AC, 50/60Hz
- DRIVER OUTPUT** 180mA, 7.6W max power
- DIMMING** TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 1% current output
- CONSTRUCTION** Plated Steel and Glass
- DIFFUSER** - White Opal Glass
- FINISHES** Polished Nickel (-20), Oiled Bronze (-22), Satin Nickel (-24), Aged Brass (-40)
- MOUNTING** 4" Octagonal J-Box*, 4" Square J-Box* with a single device mud ring *Deep J-Box (Required to house driver)
- STANDARDS** UL Dry/Damp listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

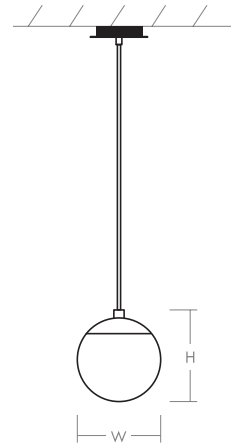

DIMENSIONS
Dia. Canopy: 5.88"
W. Fixture: 8.00"
H. Fixture: 9.50"
 Supplied with 10 ft braided cord

Order example for standard fixture:
3-671-24 (x- Voltage - xxx-Sequence # - xx-Finish)
 3: 120V to 277V
 Order example for optional color temperatures: **3-671-2724**
 27: 2700K, 35: 3500K, 40: 4000K

