

NEBULA Pendant
3-680-xx

oxygen

FIXTURE TYPE _____ LOCATION _____
PROJECT _____ DATE _____



-40 Aged Brass (Lit)




-15 Black



-24 Satin Nickel

LIGHT SOURCE	(5x) 6W LED Arrays with Driver on board, 3000K, CRI 90
LUMINAIRE POWER	29.1W at 120V
RATED LIFE	50000 hr RL
OPTIONAL COLOR TEMPERATURES	3000K Only
LUMEN OUTPUT	Delivered: 1481 lm (LM-79)
INPUT VOLTAGE	120V AC, 50/60Hz
DRIVER OUTPUT	N/A
DIMMING	TRIAC and ELV Dimming
CONSTRUCTION	Cold Rolled Steel Housing and Canopy
DIFFUSER	- 6" White Opal Glass
FINISHES	Black (-15), Satin Nickel (-24), Aged Brass (-40)
MOUNTING	4" Octagonal J-Box
STANDARDS	cETL Damp listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

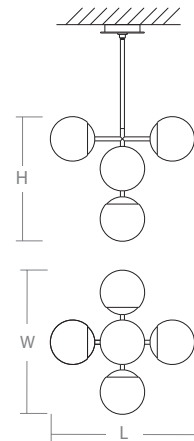

DIMENSIONS

Dia. Canopy: 4.75"/5.91" Disk
W. Fixture: 19.375"
H. Fixture: 16.75"
Supplied with 2-8", 2-12", and 3-16" stems to customize hanging height

Order example for standard fixture:
3-680-15 (x- Voltage - xxx-Sequence # - xx-Finish)
3: 120V Only

