




# ASSEMBLY INSTRUCTIONS

## ITEM NO.: 1-2100-6-70

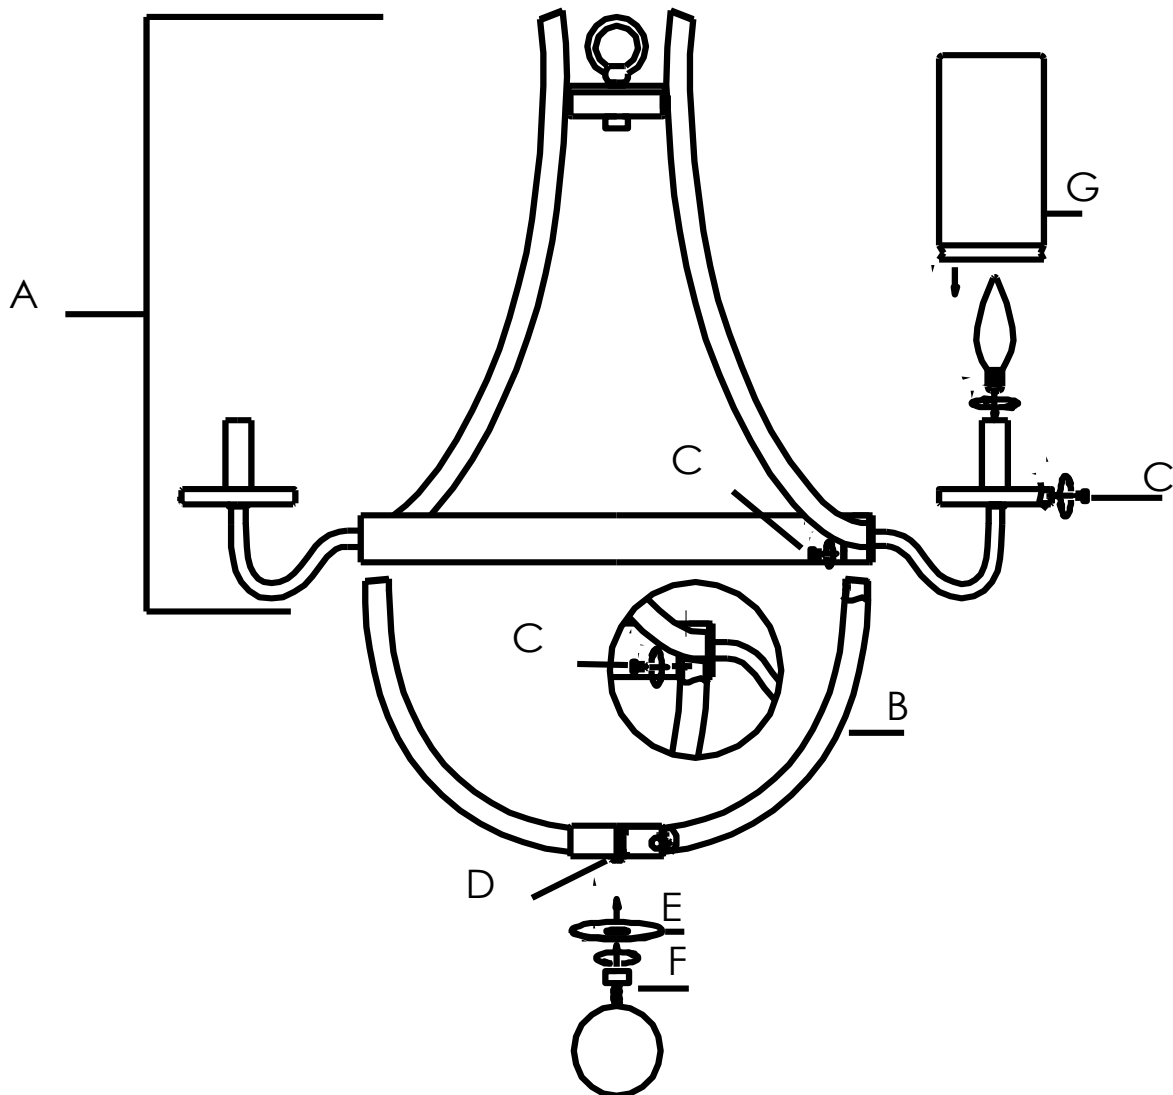

B → A → C → D → E → F → G

1. Carefully unpack and identify all parts referring to the illustration for parts identification.
2. Turn power to the installation point **OFF**.
3. Locate the arm assembly (B), aligning the holes of the arm assembly (B) with the fixture body (A), then secure with the screws (C) as shown in the diagram.
4. Pass the center hole of flat washer (E) over the protruding nipple (D) and secure with finial (F). Hand tighten until snug.
5. Install proper bulbs (not provided) to each socket referring to the markings and / or labels on the fixture for maximum wattage.
6. Unthread the screws (C) from caps of the fixture body (A), then insert the top neck of the glass (G) into the caps and secure them with the screws (C). Do not over tighten the screws.
7. Restore power to the installation point **ON**. Retain this sheet for future reference.