


## ASSEMBLY INSTRUCTIONS

1. Carefully unpack and identify all parts referring to illustration for parts identification.
2. Turn the power to the installation point OFF.
3. Unravel the supply power and ground wires and pass them through the center holes of stem (B), stem (C), loop (D) and canopy (E).
4. Thread the stem (B) onto the protruding nipple at the top of fixture body (A). Repeat the process for remaining stem (B) and stem (C) as shown in the diagram, until snug.
5. Install the loop (D) onto the top of stem (C).
6. Use carabiner (F) to connect loop (D) to the loop on the canopy (E) and twist the locking mechanism to secure.
7. Refer to the additional installation instructions included with the product for wiring and installation.
8. Install proper bulbs (not included) into each socket referring to the markings and/or labels on the fixture for maximum wattage.
9. Restore power to the installation point and retain this sheet for future reference.

## Convert carabiner system to swivel

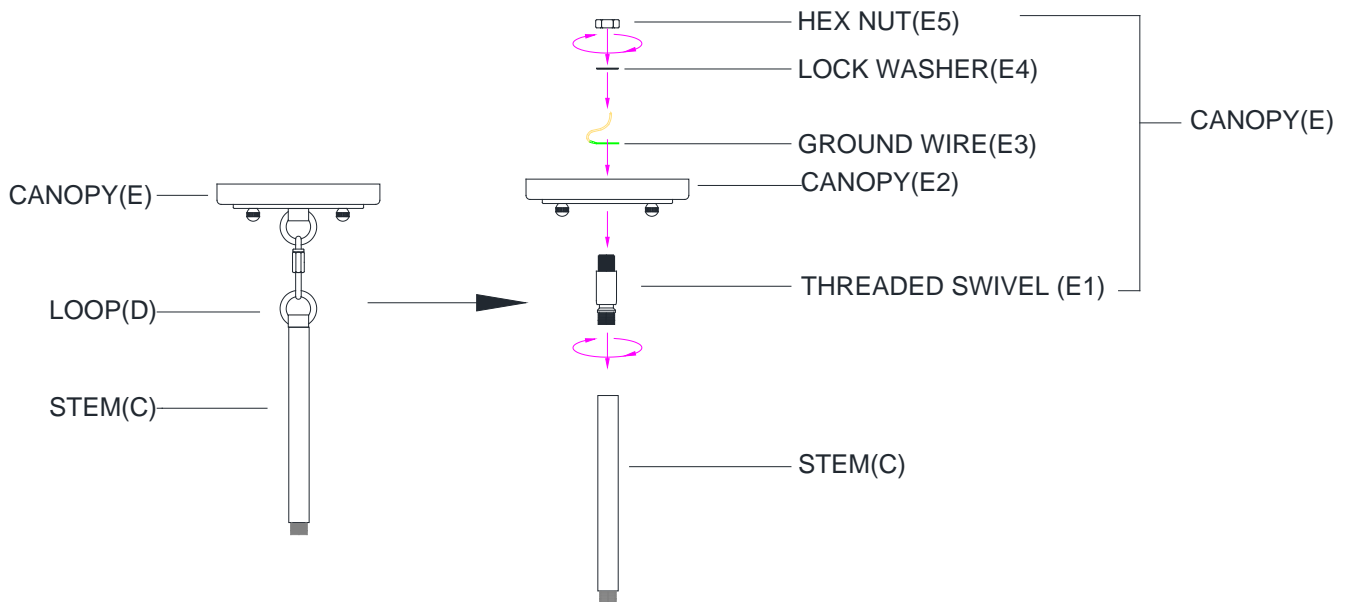

1. Remove the loops (D) from the canopy (E) and stem (C).
2. Install the threaded swivel (E1) onto the top of stem (C).
3. Place the canopy (E2), ground wire (E3) and lock washer (E4) over the threaded swivel (E1), securing with hex nut (E5).