

Project:


# Thin-Line LED Pendant Spec Sheet

SKU: 2818.03-3

A system of minimally scaled LED linear pendants, [uplight/downlight wall bars](#), and [indirect light wall bars](#). Thin-Line is offered in a variety of lengths, finishes, and lighting configurations. Thin-Line Pendants are available in single- and double-sided configurations; the single-sided configurations can be installed as a downlight or up-light, providing direct or indirect illumination. The driver for this fixture must be installed in a remote location. If you would like the look of a smaller canopy than our standard, our [Optional Mini Box Canopy](#) is also available for the Thin-Line LED Pendant.

Learn more: <https://sonnemanlight.com/thin-line-led-pendant>

Type #:

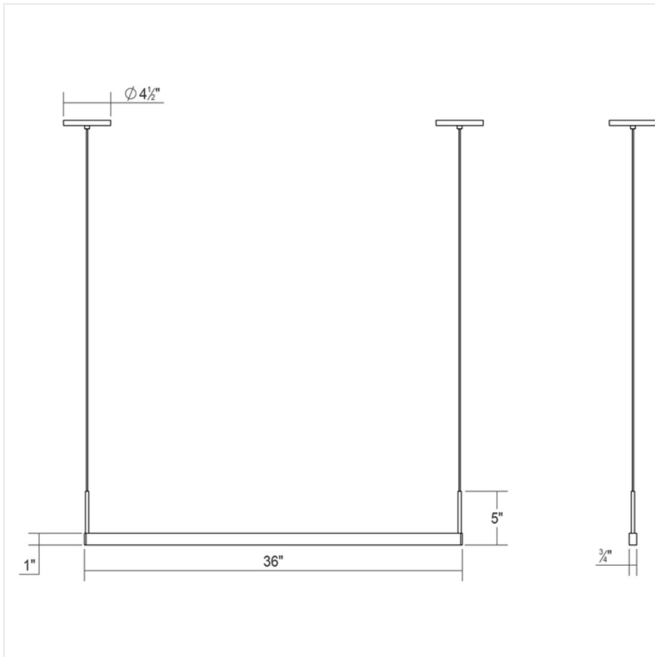

## Dimensions

Height:	5"
Width:	36"
Length:	0.75"
Canopy/Backplate/Base:	4.5"
Hanging Details:	6' Adjustable Cord
Size:	3' Two-Sided
Canopy/Backplate/Base Height:	0.5"

## Electrical Specs

Bulb(s) Included?:	Yes
Bulb 1 Type:	Integral LED
Bulb Quantity:	2
Input Voltage:	120VAC
Wattage:	38
Initial Lumens:	2220
Delivered Lumens:	1350
Kelvin:	3000K
CRI:	90
Power Supply Type:	Driver
Power Supply Quantity:	2
Power Supply Location:	Remote
Dimming Type:	TRIAC/ELV
Bulb Max Wattage:	38

## Installation

Installation:	Licensed electrician required
Sloped Ceiling Compatible?:	Compatible up to 45°
Cord Length:	6 ft
Minimum Hanging Height:	5.75"
Maximum Hanging Height:	73.75"

## Shipping

Carton 1 L x W x H:	40" X 7" X 4"
Carton 1 Gross Weight:	6 LBS

## Shade

Shade Material:	Aluminum w/Optical Acrylic
-----------------	----------------------------

## General Listings

Features:	Damp Rated
Certification:	C-ETL-US
Color/Finish:	Satin White (.03)
Dark Sky Friendly:	N

## Available Finishes

Available Finishes:	Bright Satin Aluminum (.16), Satin Black (.25), Satin White (.03)
---------------------	---

## Available Color Temperatures

Available Color Temperatures:	2700K, 3000K, 3500K
-------------------------------	---------------------