

FLOS

■ F6564030 Black

Tab Floor

Designed by Edward Barber and Jay Osgerby, 2011




9W - 347lm - 2700K - CRI> 90

Floor luminaire providing direct lighting with adjustable head. Body in painted pressofused aluminium. Multi-led diffuser in specially designed PMMA to avoid the Multi Shadow effect and dazzle. Head rotation $\pm 90^\circ$.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



Main specifications

| | |
|-------------------|---------------------|
| EAN | 8059607006573 |
| Mounting | Floor |
| Environments | Indoor dry location |
| Light Source Type | LED |
| LED type | LED Module |
| Power (W) | 9 |
| System flux (lm) | 347 |

Physical

| | |
|---------------------|---------|
| Color | Black |
| Net weight (lb) | 4.19 |
| Package height (in) | 6.3 |
| Package width (in) | 12.99 |
| Package length (in) | 47.64 |
| Package volume (in) | 3898.68 |
| IP internal | 20 |

Download

| | |
|---------------------------------------|-------|
| Mounting instructions | ↓ PDF |
| Mounting instructions | ↓ PDF |
| Spare Parts | ↓ PDF |

Photometric Files


| | |
|---------------------------|-------|
| LDT / IES | ↓ LDT |
|---------------------------|-------|

Technical Drawings

| | |
|--------------------|-------|
| 2D | ↓ ZIP |
| 3D | ↓ ZIP |



Schematic light drawing



Photometric

| | |
|--------------------|------------|
| Lighting type | Direct |
| Light distribution | Asymmetric |
| CCT (K) | 2700 |
| CRI> | 90 |

Electrical

| | |
|----------------------|----------------------------------|
| Insulation class | III |
| Frequency (Hz) | 50/60 |
| Main voltage (Vac) | 100-240/24 |
| LED voltage Vf (Vdc) | null |
| Driver | Remote included |
| Dimmable | No |
| Dimming type | Electronic 24V |
| Dimming interface | Switch Integrated (Not Dimmable) |
| Plug type | Type G, Type A, Type C |
| Batteries inside | No |

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class D




Replaceable (LED only) light source by a professional



Replaceable control gear by an end-user

Spare Parts

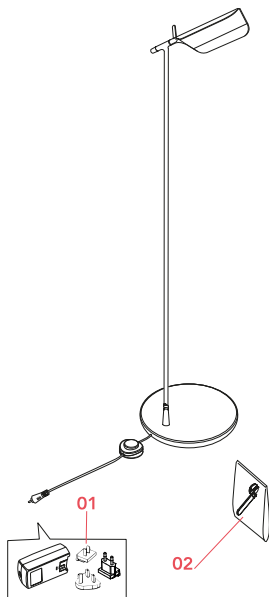

01. Black plug assembly kit & 24V driver RF3320100

02. Locking key tool RF13905

DOWNLOAD



RF3320100
Black plug assembly kit & 24V
driver



RF13905
Locking key tool
driver